

**RWS300B**

**EVALUATION DATA**

**型式データ**

## INDEX

1. 測定方法	Evaluation Method	PAGE
1.1	測定回路 Circuit used for determination	
	測定回路1 Circuit 1 used for determination .....	T-1
	静特性 Steady state data	
	通電ドリフト特性 Warm up voltage drift characteristics	
	出力保持時間特性 Hold up time characteristics	
	出力立ち上がり特性 Output rise characteristics	
	出力立ち下がり特性 Output fall characteristics	
	過電流保護特性 Over current protection (OCP) characteristics	
	過電圧保護特性 Over voltage protection (OVP) characteristics	
	入力電圧瞬停特性 Response to brown out characteristics	
	入力電流波形 Input current waveform	
	測定回路2 Circuit 2 used for determination .....	T-1
	過渡応答 (負荷急変) 特性 Dynamic load response characteristics	
	測定回路3 Circuit 3 used for determination .....	T-2
	入力サージ電流 (突入電流) 波形 Inrush current waveform	
	測定回路4 Circuit 4 used for determination .....	T-2
	リーク電流特性 Leakage current characteristics	
	測定回路5 Circuit 5 used for determination .....	T-3
	出力リップル、ノイズ波形 Output ripple and noise waveform	
	測定構成 Configuration used for determination .....	T-3
	EMI特性 Electro-Magnetic Interference characteristics	
	(a) 雑音端子電圧 (帰還ノイズ) Conducted Emission	
	(b) 雑音電界強度 (放射ノイズ) Radiated Emission	
1.2	使用測定機器 List of equipment used .....	T-4
1.3	評価負荷条件 Load conditions .....	T-4

## 2. 特性データ Characteristics

## 2.1 静特性 Steady state data

## (1) 入力・負荷・温度変動／出力起動・遮断電圧

Regulation - line and load, Temperature drift / Start up voltage and Drop out voltage ..... T-5

## (2) リップルノイズ電圧対入力電圧

Ripple noise voltage vs. Input voltage ..... T-6

## (3) 効率・力率対出力電流 Efficiency and Power factor vs. Output current ..... T-7

## (4) 入力電力対出力電流 Input power vs. Output current ..... T-8

## (5) 入力電流対出力電流 Input current vs. Output current ..... T-9

## 2.2 通電ドリフト特性 Warm up voltage drift characteristics ..... T-10

## 2.3 出力保持時間特性 Hold up time characteristics ..... T-10

## 2.4 出力立ち上がり特性 Output rise characteristics ..... T-11

## 2.5 出力立ち下がり特性 Output fall characteristics ..... T-12

## 2.6 過電流保護特性 Over current protection (OCP) characteristics ..... T-13

## 2.7 過電圧保護特性 Over voltage protection (OVP) characteristics ..... T-13

## 2.8 過渡応答（負荷急変）特性 Dynamic load response characteristics ..... T-14

## 2.9 入力電圧瞬停特性 Response to brown out characteristics ..... T-15

## 2.10 入力サージ電流（突入電流）波形 Inrush current waveform ..... T-16

## 2.11 高調波成分 Input current harmonics ..... T-17

## 2.12 入力電流波形 Input current waveform ..... T-17

## 2.13 リーク電流特性 Leakage current characteristics ..... T-18

## 2.14 出力リップル、ノイズ波形 Output ripple and noise waveform ..... T-19

## 2.15 EMI特性 Electro-Magnetic Interference characteristics ..... T-20～23

## 使用記号 Terminology used


	定義	Definition
$V_{in}$	.....	入力電圧 Input voltage
$V_{out}$	.....	出力電圧 Output voltage
$I_{in}$	.....	入力電流 Input current
$I_{out}$	.....	出力電流 Output current
$T_a$	.....	周囲温度 Ambient temperature
$f$	.....	周波数 Frequency

1. 測定方法 Evaluation Method

1.1 測定回路 Circuit used for determination


測定回路1 Circuit 1 used for determination

- ・静特性 Steady state data
- ・通電ドリフト特性 Warm up voltage drift characteristics
- ・出力保持時間特性 Hold up time characteristics
- ・出力立ち上がり特性 Output rise characteristics
- ・出力立ち下がり特性 Output fall characteristics
- ・過電流保護特性 Over current protection (OCP) characteristics
- ・過電圧保護特性 Over voltage protection (OVP) characteristics
- ・入力電圧瞬停特性 Response to brown out characteristics
- ・入力電流波形 Input current waveform

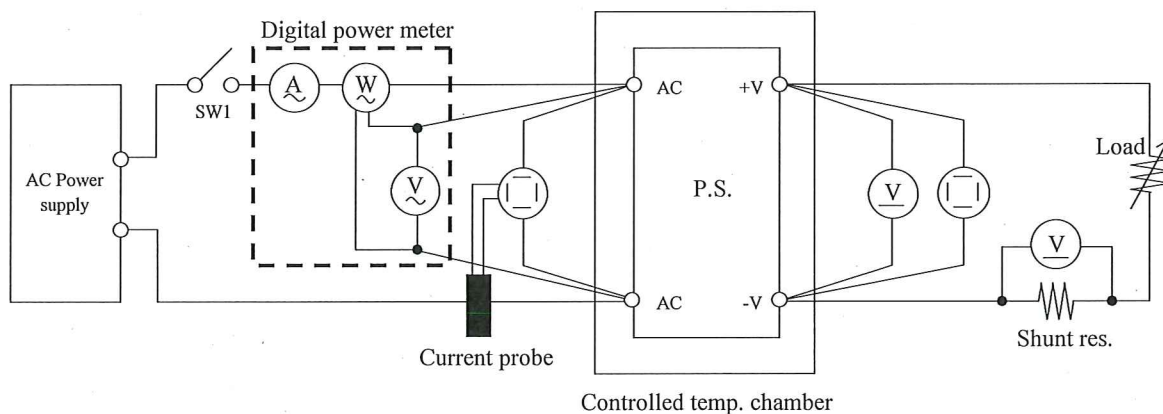


測定回路2 Circuit 2 used for determination

- ・過渡応答 (負荷急変) 特性 Dynamic load response characteristics

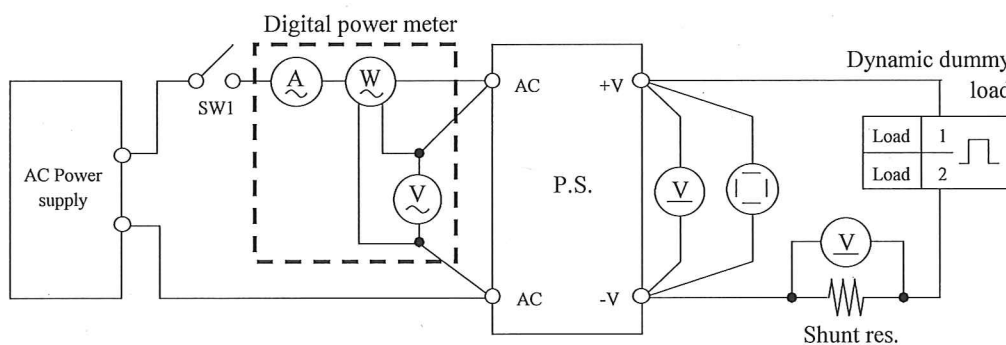


Output current waveform  
I<sub>out</sub> 50% ↔ 100%

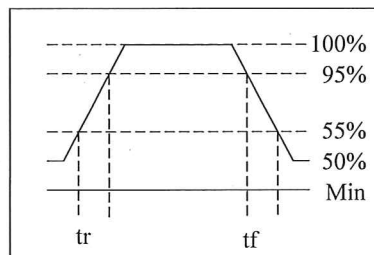


測定回路3 Circuit 3 used for determination

・入力サージ電流 (突入電流) 波形 Inrush current waveform

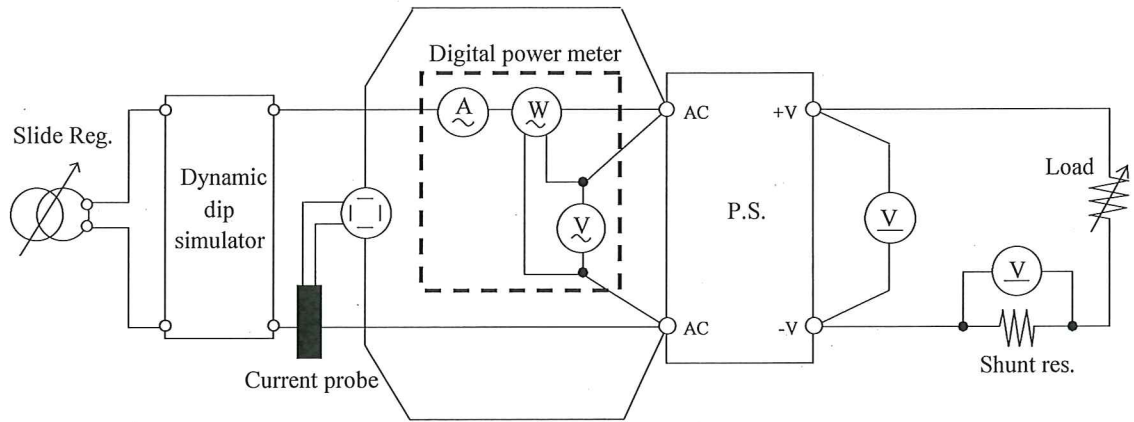


測定回路4 Circuit 4 used for determination

・リーク電流特性 Leakage current characteristics

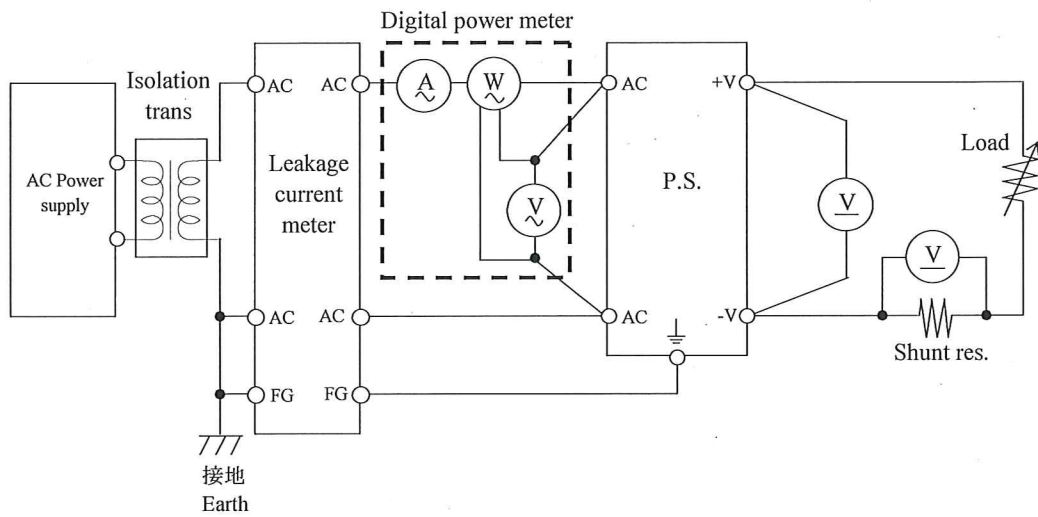

測定回路5 Circuit 5 used for determination

・出力リップル、ノイズ波形 Output ripple and noise waveform

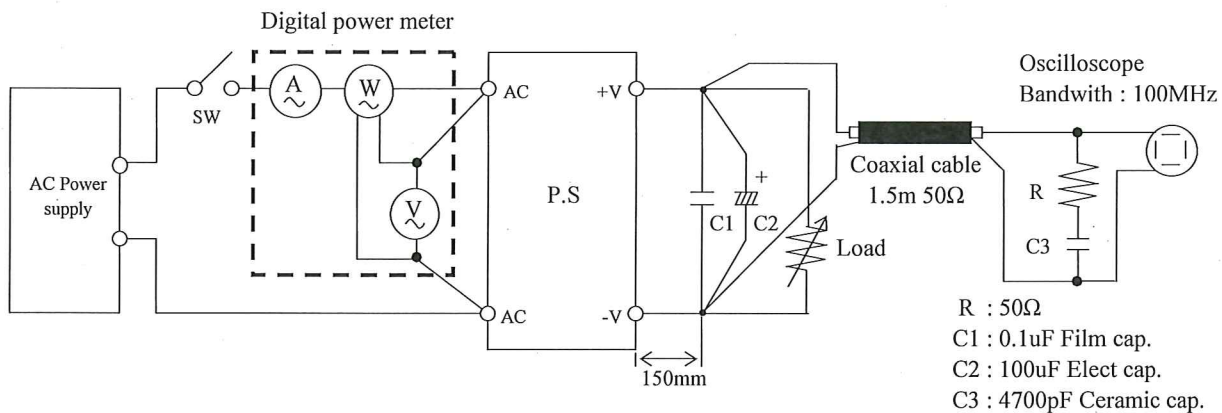


測定構成 Configuration used for determination

・EMI特性 Electro-Magnetic Interference characteristics


(a) 雑音端子電圧 (帰還ノイズ)

Conducted Emission

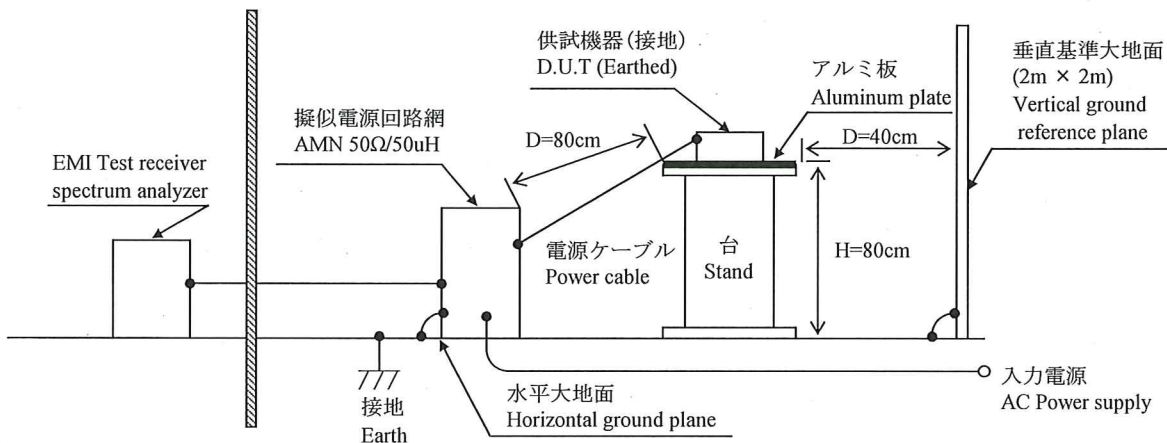

(b) 雑音電界強度 (放射ノイズ)

Radiated Emission

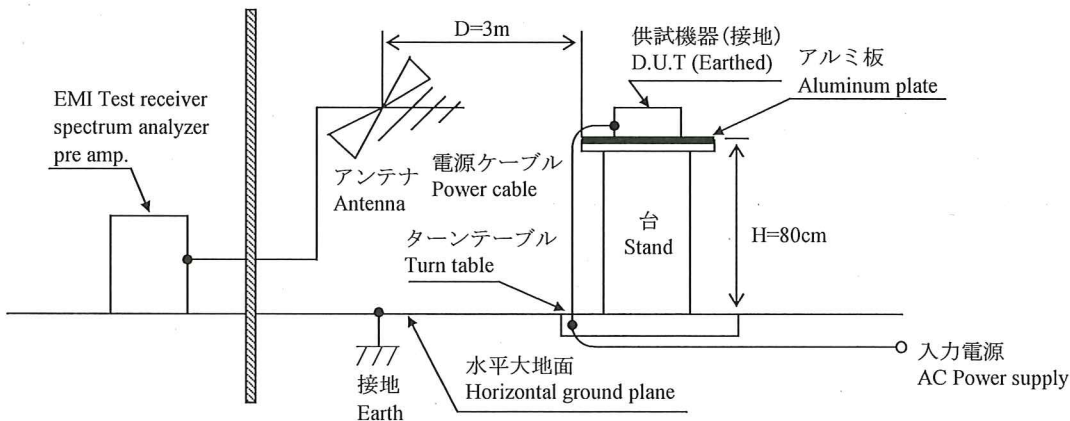

## 1.2 使用測定機器 List of equipment used

	EQUIPMENT USED	MANUFACTURER	MODEL NO.
1	DIGITAL STORAGE OSCILLOSCOPE	YOKOGAWA ELECT.	DL9040L / DLM2054
2	DIGITAL MULTIMETER	AGILENT	34970A
3	DIGITAL POWER METER	YOKOGAWA ELECT.	WT110 / WT210
4	CURRENT PROBE	YOKOGAWA ELECT.	701928 / 701930
5	DYNAMIC DUMMY LOAD	TAKASAGO	FK-600L / FK-1000L
6	DUMMY LOAD	PCN	RHF250 SIRIES
7	SLIDE REGULATOR	MATSUNAGA	S3-24100
8	ISOLATION TRANS	MATSUNAGA	3WTC-50K
9	CVCF	TAKASAGO	AA2000XG
10	CVCF	NF	ES10000S
11	LEAKAGE CURRENT METER	HIOKI	3156
12	DYNAMIC DIP SIMULATOR	TAKAMISAWA	PSA-210
13	CONTROLLED TEMP. CHAMBER	ESPEC	SU-641 / SH-240
14	EMI TEST RECEIVER / SPECTRUM ANALYZER	ROHDE & SCHWARZ	ESCI
15	PRE AMP.	SONOMA	310N
16	AMN	SCHWARZBECK	NNLK8121
17	ANTENNA	SCHWARZBECK	CBL6111D
18	HARMONIC / FLICKER ANALYZER	KIKUSUI	KHA1000
19	SINGLE-PHASE MASTER	NF	4420
20	REFERENCE IMPEDANCE NETWORK 20A	NF	4150
21	MULTI OUTLET UNIT	KIKUSUI	OT01-KHA

## 1.3 評価負荷条件 Load conditions

\*入力電圧が110VAC以下の場合、下記のとおり出力デレージングが必要です。

Output derating is needed when input voltage is 110VAC or less.

Output voltage : 5V, 12V, 24V

Vin	Iout : Full load	5V	12V	24V
110 - 265VAC	100%	50A	25A	12.5A
100VAC	92%	46A	23A	11.5A
85VAC	80%	40A	20A	10.0A

## 2. 特性データ Characteristics

## 2.1 静特性 Steady state data

(1) 入力・負荷・温度変動／出力起動・遮断電圧

Regulation - line and load, Temperature drift / Start up voltage and Drop out voltage

5V 1. Regulation - line and load Condition Ta : 25 °C

Iout \ Vin	100VAC	110VAC	200VAC	265VAC	Line regulation	
0%	5.036V	5.036V	5.036V	5.036V	0mV	0.000%
50%	5.022V	5.022V	5.022V	5.022V	0mV	0.000%
Full load	5.011V	5.009V	5.009V	5.009V	0mV ※1	0.000%
Load regulation	25mV	27mV	27mV	27mV		
	0.500%	0.540%	0.540%	0.540%		

## 2. Temperature drift

Conditions Vin : 110 VAC  
Iout : Full load

Ta	-10°C	+25°C	+50°C	Temperature stability	
Vout	5.009V	5.009V	5.005V	4mV	0.080%

## 3. Start up voltage and Drop out voltage

Conditions Ta : 25 °C  
Iout : 100 %

Start up voltage (Vin)	75VAC
Drop out voltage (Vin)	59VAC

12V 1. Regulation - line and load Condition Ta : 25 °C

Iout \ Vin	100VAC	110VAC	200VAC	265VAC	Line regulation	
0%	12.027V	12.028V	12.027V	12.027V	1mV	0.008%
50%	12.017V	12.016V	12.017V	12.017V	1mV	0.008%
Full load	12.006V	12.003V	12.003V	12.003V	0mV ※1	0.000%
Load regulation	21mV	25mV	24mV	24mV		
	0.175%	0.208%	0.200%	0.200%		

## 2. Temperature drift

Conditions Vin : 110 VAC  
Iout : Full load

Ta	-10°C	+25°C	+50°C	Temperature stability	
Vout	12.011V	12.003V	12.003V	8mV	0.067%

## 3. Start up voltage and Drop out voltage

Conditions Ta : 25 °C  
Iout : 100 %

Start up voltage (Vin)	76VAC
Drop out voltage (Vin)	67VAC

24V 1. Regulation - line and load Condition Ta : 25 °C

Iout \ Vin	100VAC	110VAC	200VAC	265VAC	Line regulation	
0%	24.018V	24.018V	24.017V	24.017V	1mV	0.004%
50%	24.013V	24.013V	24.013V	24.013V	0mV	0.000%
Full load	24.011V	24.009V	24.009V	24.009V	0mV ※1	0.000%
Load regulation	7mV	9mV	8mV	8mV		
	0.029%	0.038%	0.033%	0.033%		

## 2. Temperature drift

Conditions Vin : 110 VAC  
Iout : Full load

Ta	-10°C	+25°C	+50°C	Temperature stability	
Vout	24.042V	24.009V	24.003V	39mV	0.163%

## 3. Start up voltage and Drop out voltage

Conditions Ta : 25 °C  
Iout : 100 %

Start up voltage (Vin)	76VAC
Drop out voltage (Vin)	62VAC


※1 Line regulation : 110VAC - 265VAC




(2) リップルノイズ電圧対入力電圧  
Ripple noise voltage vs. Input voltage

Conditions Iout : Full load  
Ta : -10 °C ---  
25 °C - - -  
50 °C ———


5V

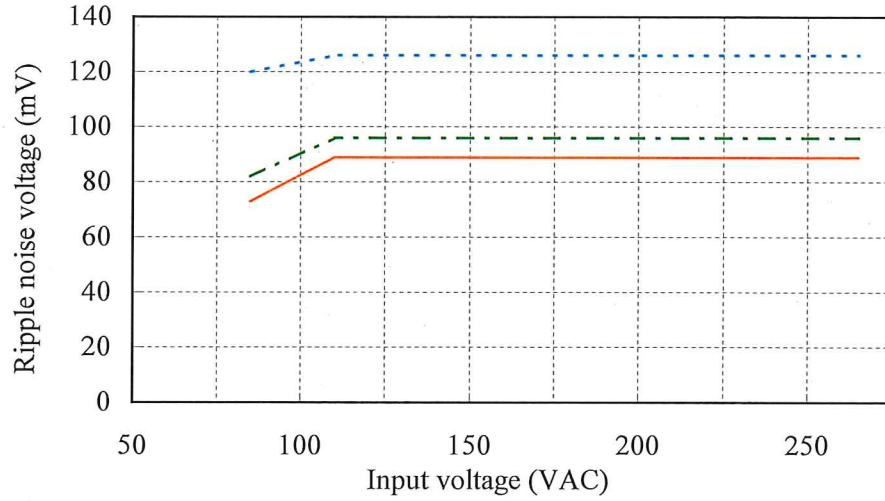

12V

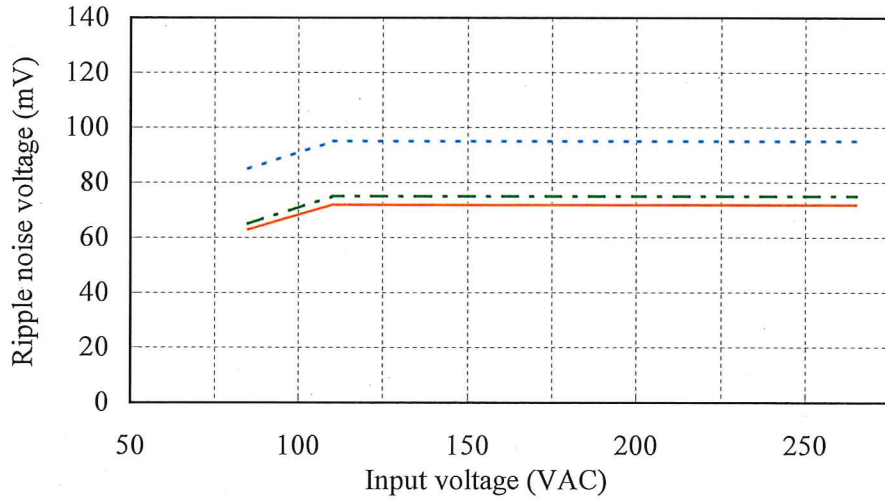

24V


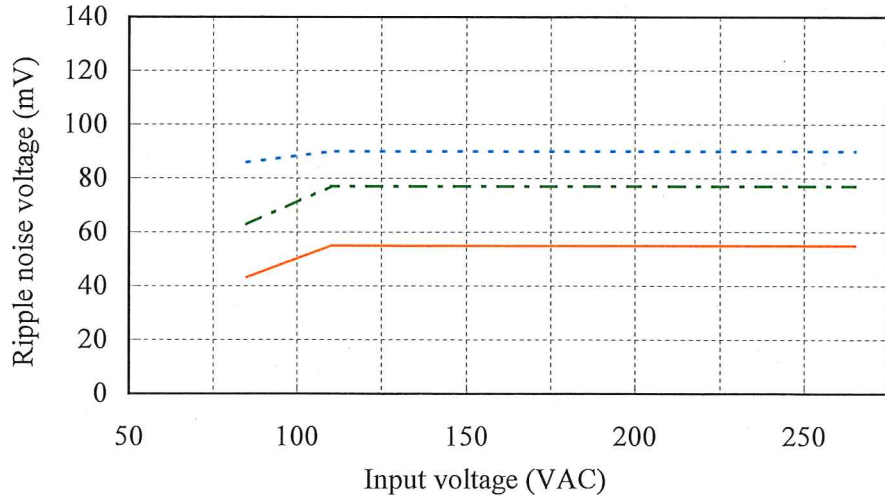


## (3) 効率・力率対出力電流



Efficiency and Power factor vs. Output current

Conditions Vin : 100 VAC ---  
 110 VAC - - -  
 200 VAC ———  
 265 VAC - · - ·  
 Ta : 25 °C



5V

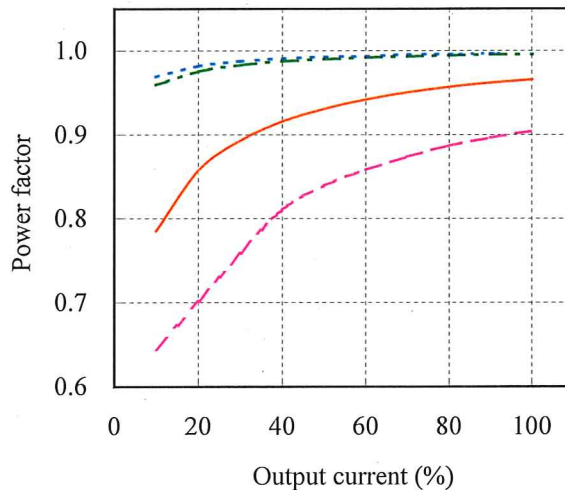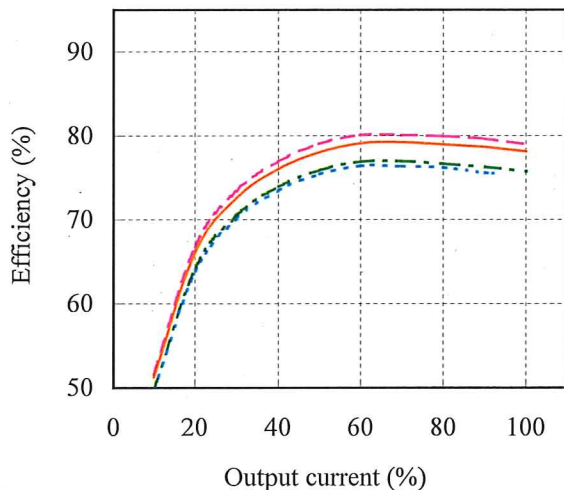

12V

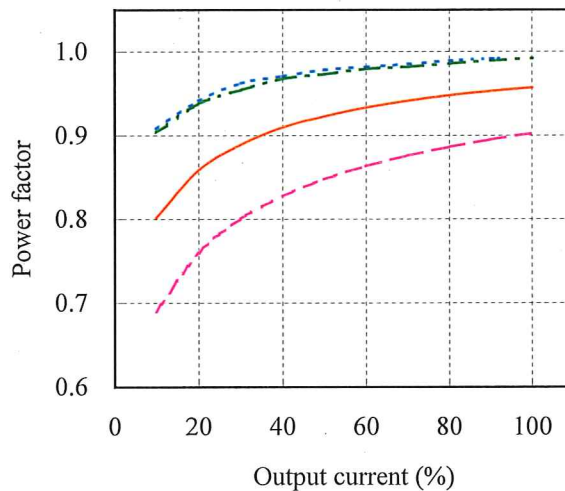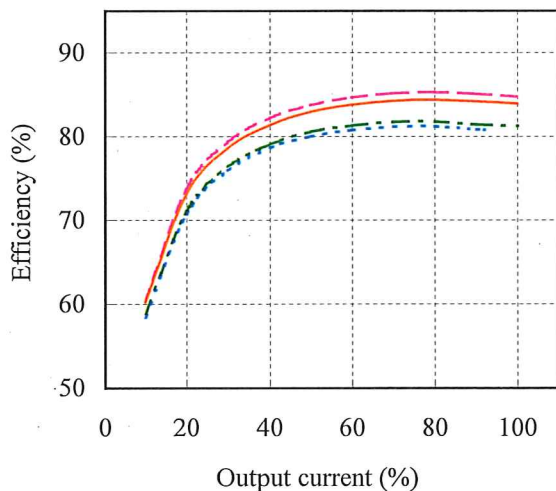

24V

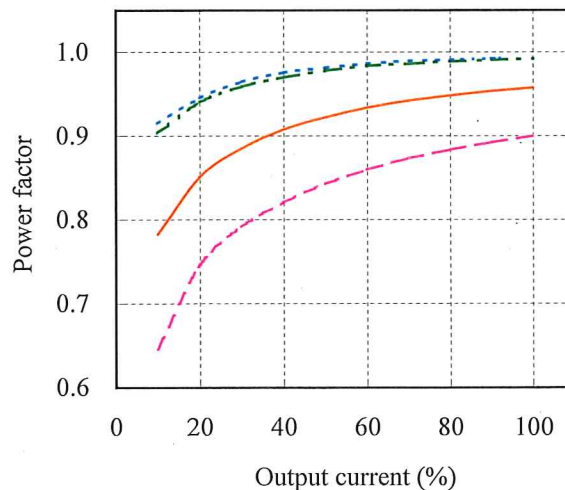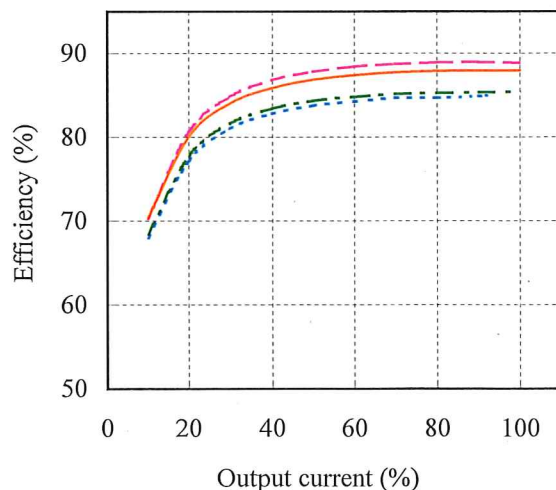


(4) 入力電力対出力電流

Input power vs. Output current

Conditions Vin : 100 VAC ---  
 110 VAC - - -  
 200 VAC ———  
 265 VAC - · - ·  
 Ta : 25 °C


5V

Vin	Input power
	Iout : 0%
100VAC	3.6W
110VAC	3.6W
200VAC	4.0W
265VAC	4.0W

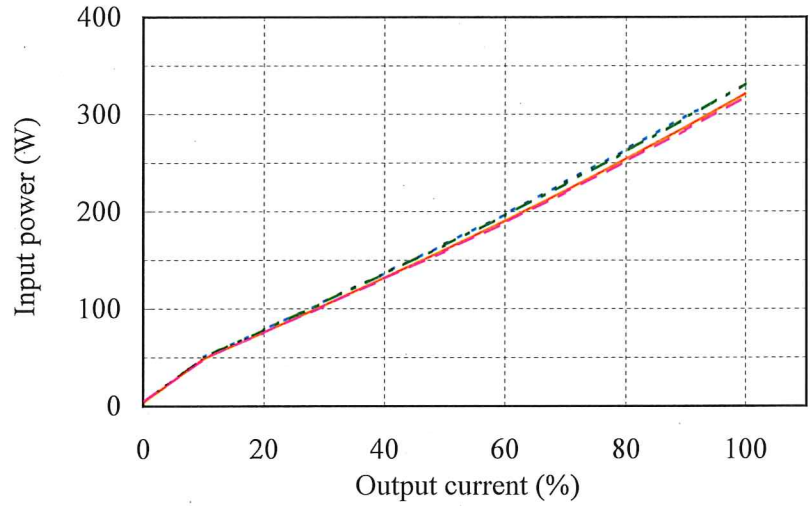


12V

Vin	Input power
	Iout : 0%
100VAC	3.6W
110VAC	3.7W
200VAC	3.9W
265VAC	4.0W

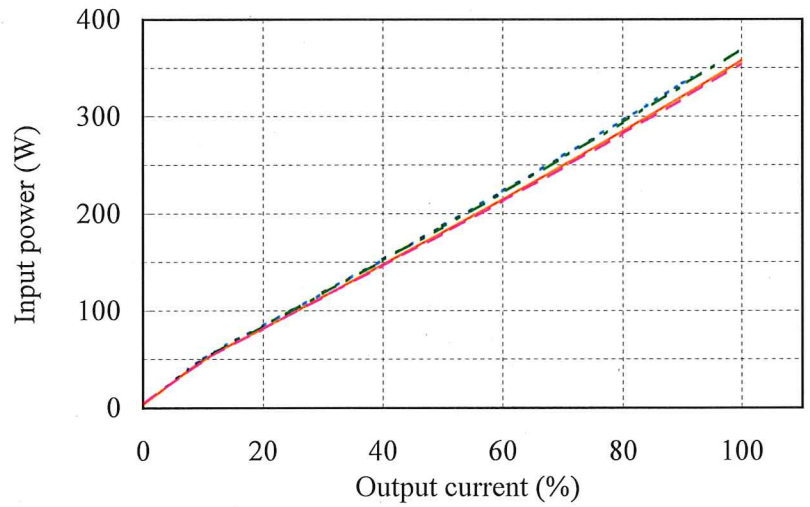

24V

Vin	Input power
	Iout : 0%
100VAC	3.6W
110VAC	3.7W
200VAC	3.9W
265VAC	4.1W

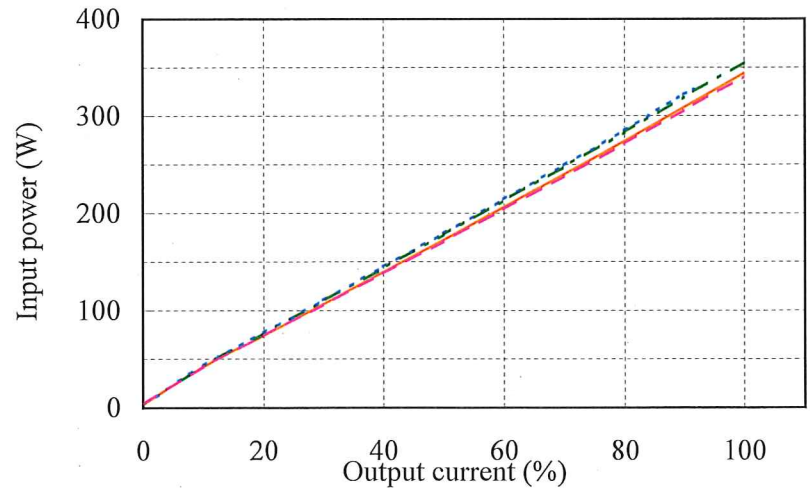


(5) 入力電流対出力電流

Input current vs. Output current

Conditions Vin : 100 VAC ---  
 110 VAC - - -  
 200 VAC ———  
 265 VAC - · - ·  
 Ta : 25 °C


5V

Vin	Input current
	Iout : 0%
100VAC	0.06A
110VAC	0.06A
200VAC	0.07A
265VAC	0.08A

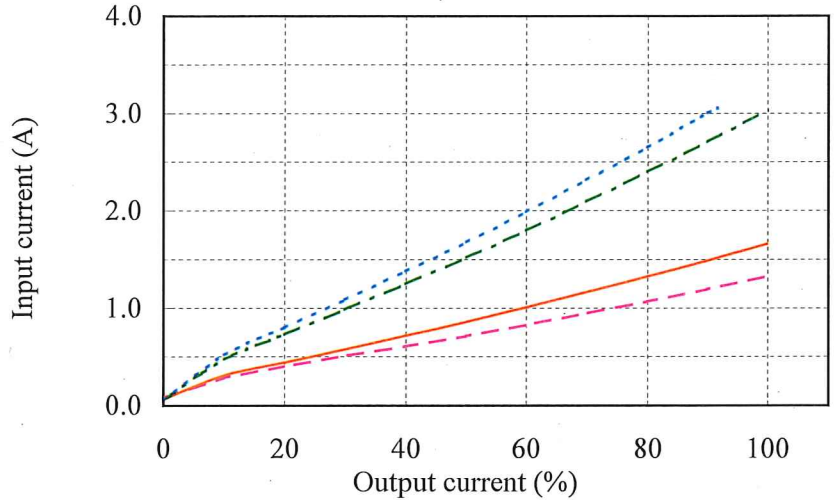


12V

Vin	Input current
	Iout : 0%
100VAC	0.05A
110VAC	0.06A
200VAC	0.06A
265VAC	0.08A

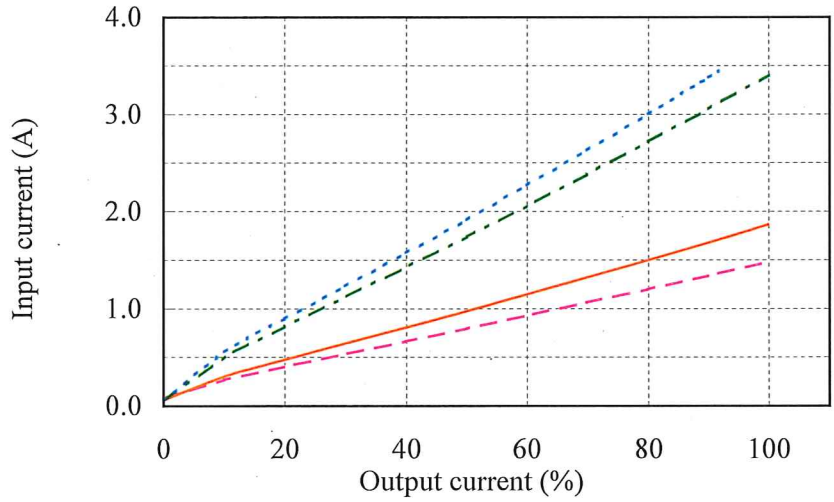

24V




Vin	Input current
	Iout : 0%
100VAC	0.06A
110VAC	0.06A
200VAC	0.07A
265VAC	0.08A

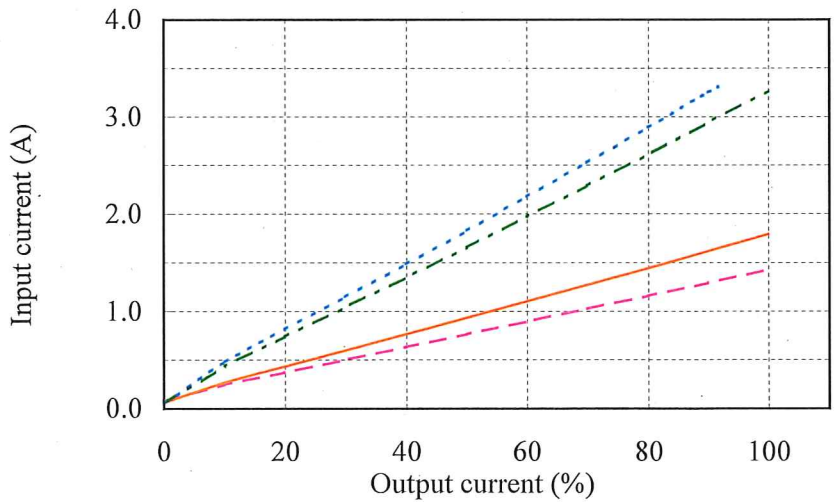

2.2 通電ドリフト特性

Warm up voltage drift characteristics




Conditions Vin : 110 VAC  
Iout : Full load  
Ta : 25 °C

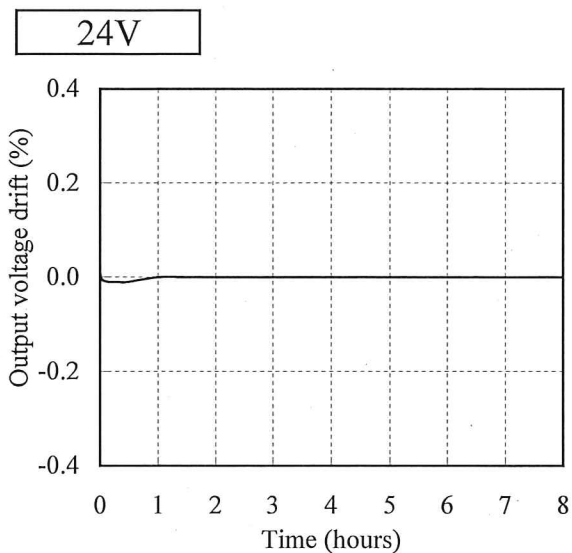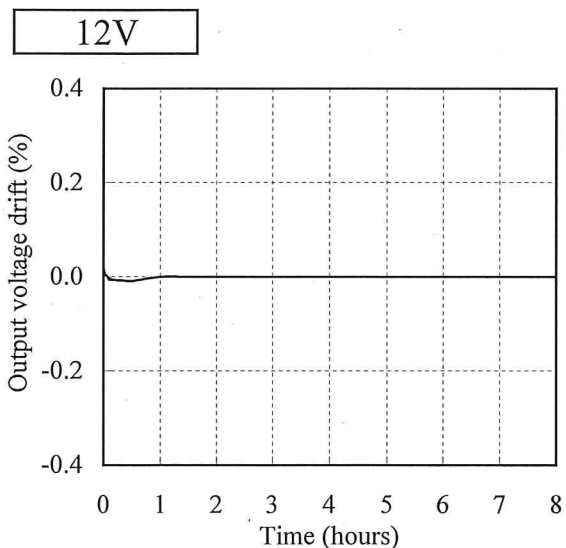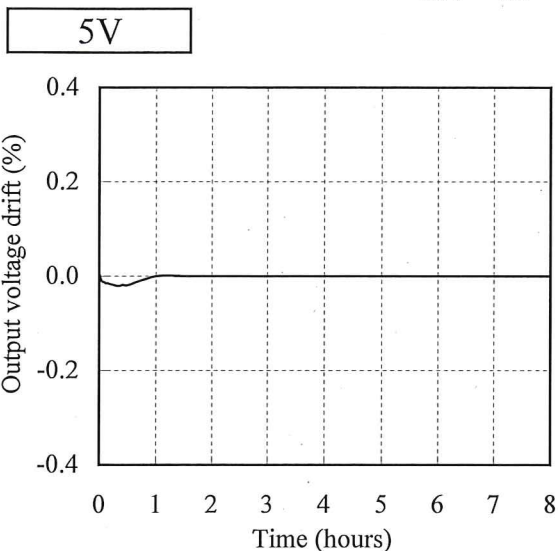

2.3 出力保持時間特性

Hold up time characteristics


Conditions Vin : 110 VAC ———  
200 VAC - - - -  
Ta : 25 °C

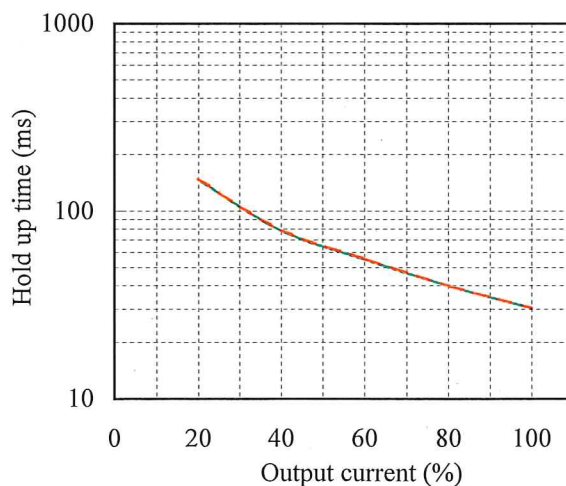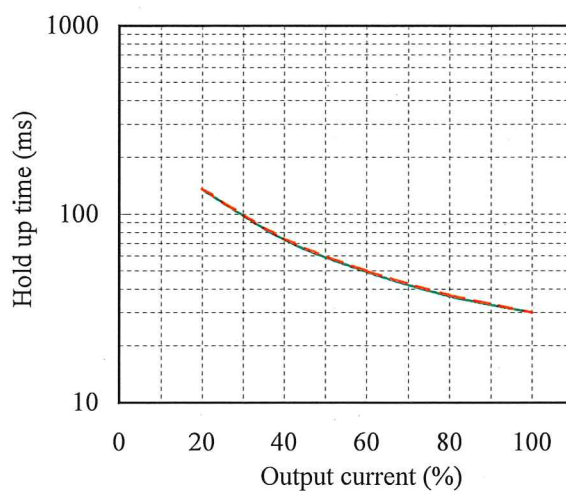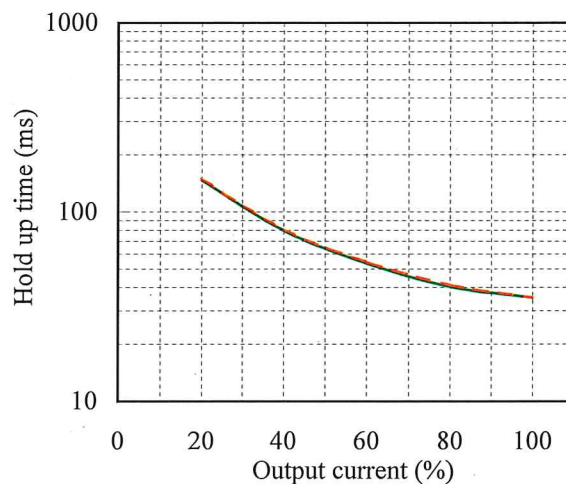

## 2.4 出力立ち上がり特性




Output rise characteristics

Conditions  $V_{in}$ : 100 VAC (A)  
 110 VAC (B)  
 200 VAC (C)  
 265 VAC (D)  
 $T_a$ : 25 °C

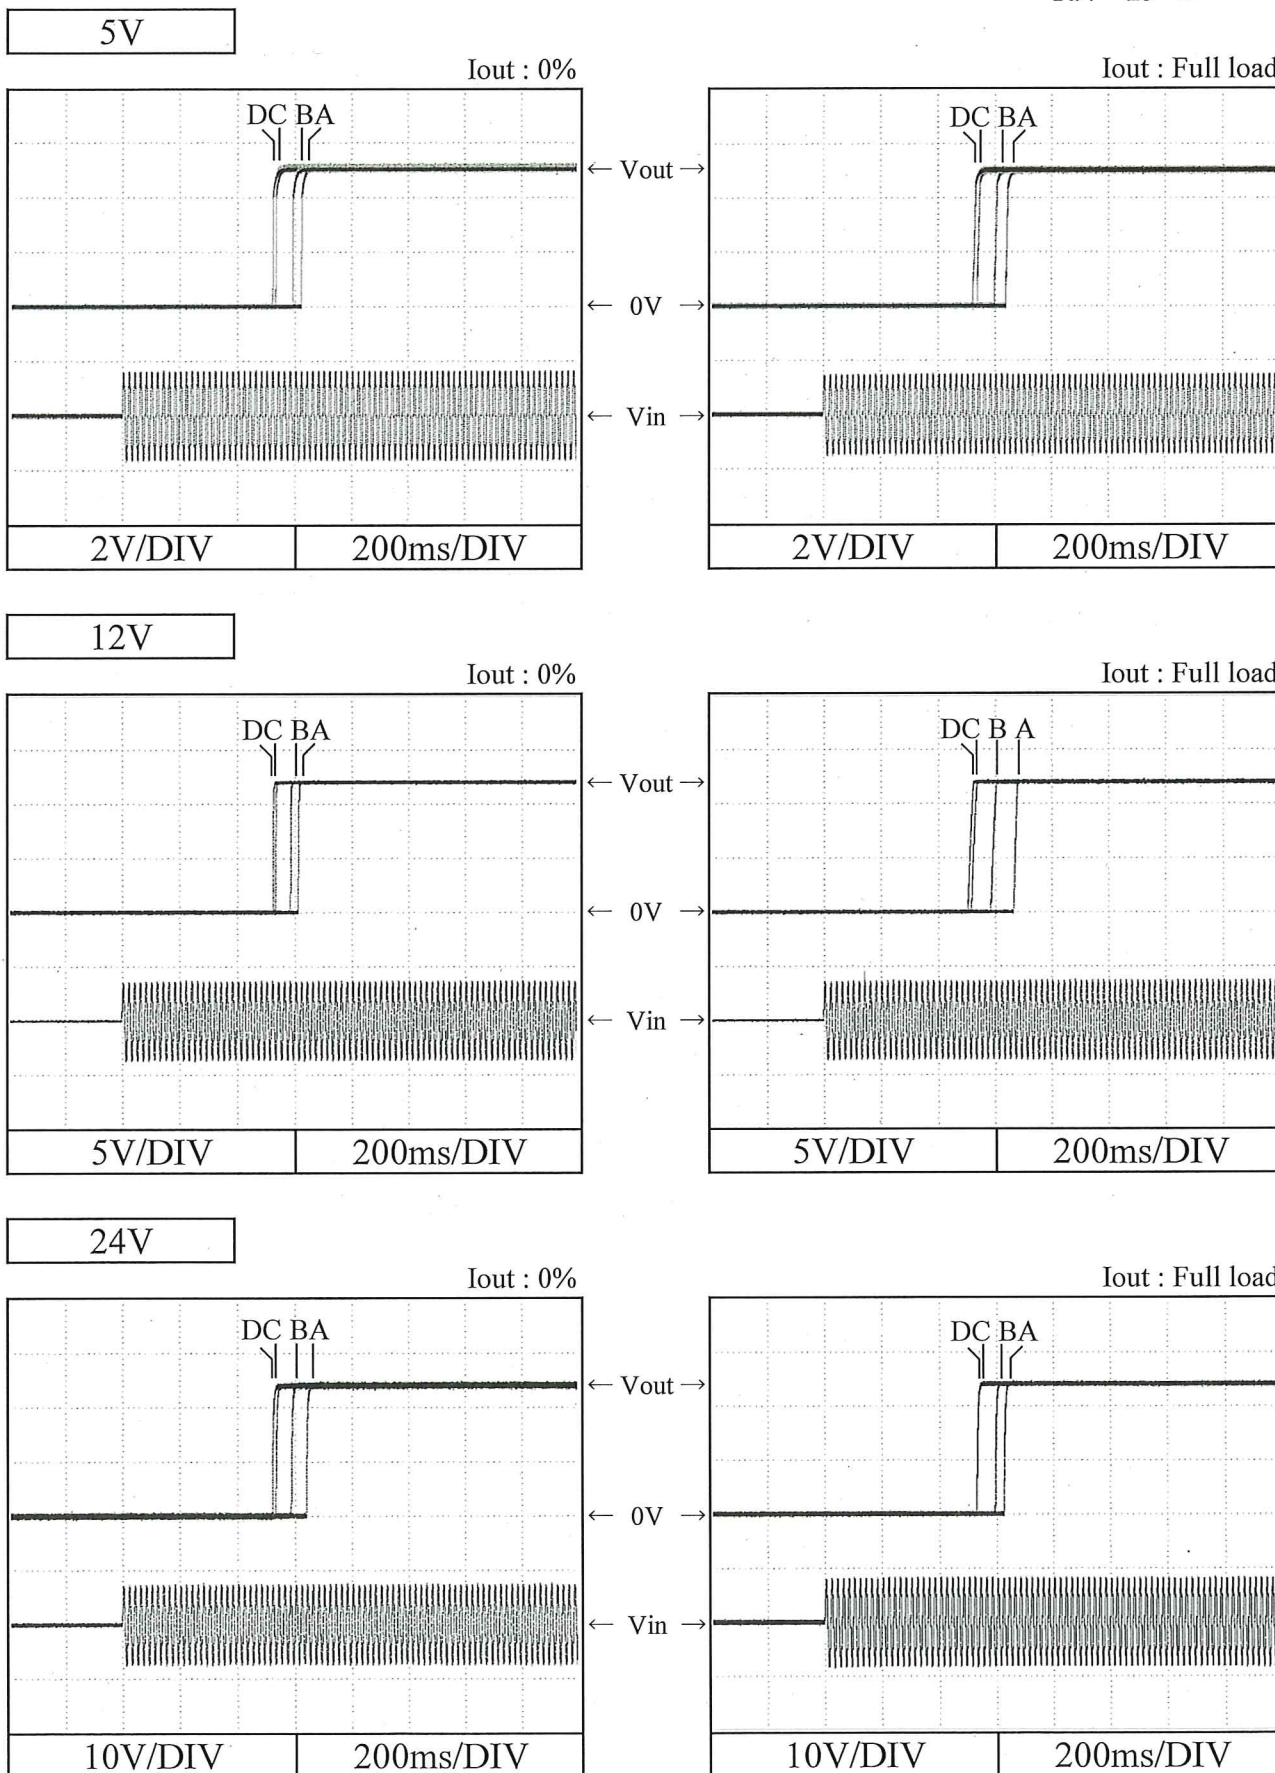

## 2.5 出力立ち下がり特性 Output fall characteristics

Conditions  $V_{in}$  : 100 VAC (A)  
 110 VAC (B)  
 200 VAC (C)  
 265 VAC (D)  
 $T_a$  : 25 °C

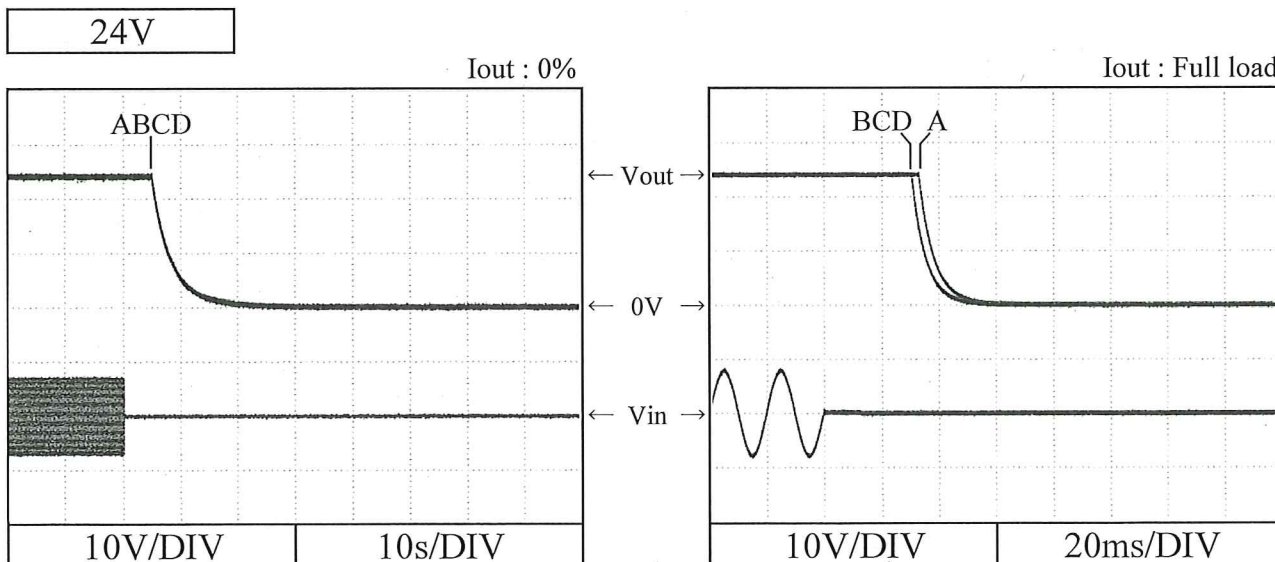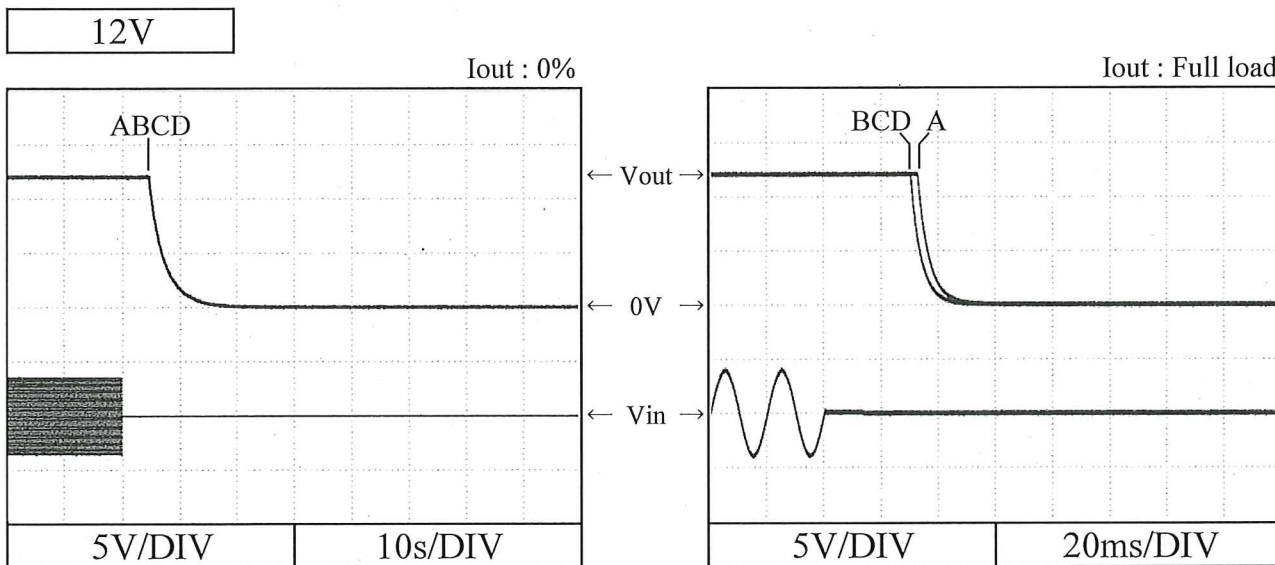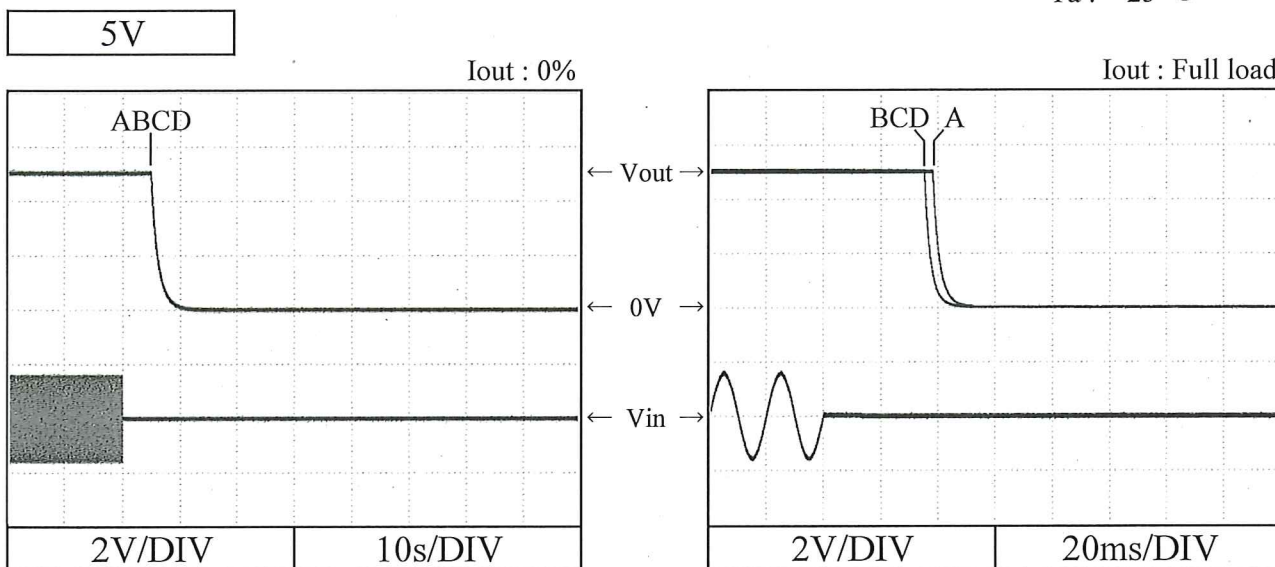

## 2.6 過電流保護特性

Over current protection (OCP) characteristics

Conditions  $V_{in}$  : 110 VAC

$T_a$  : -10 °C

25 °C


50 °C

---


---

---


5V

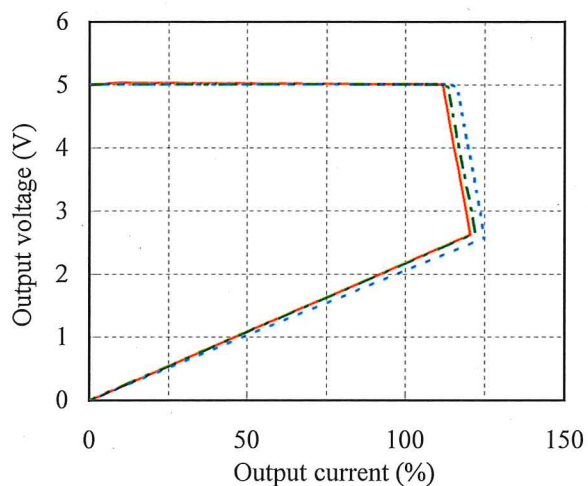

12V

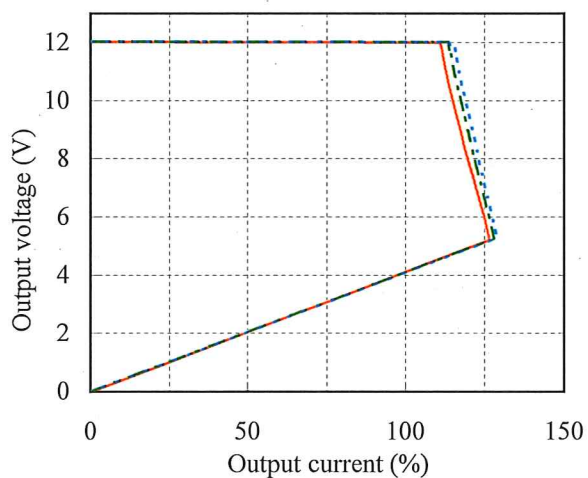

24V

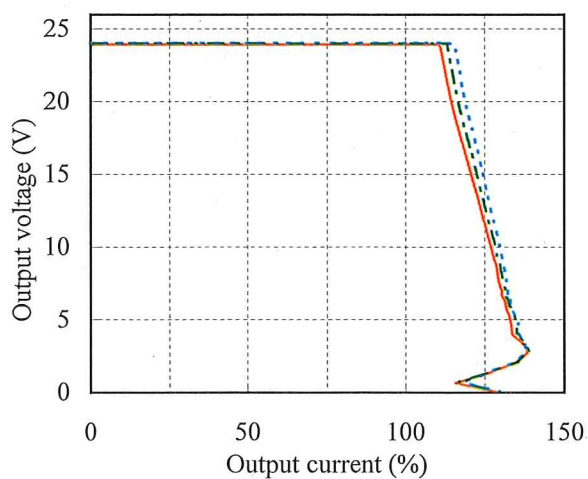




## 2.7 過電壓保護特性

Over voltage protection (OVP) characteristics

Conditions  $V_{in}$  : 100 VAC

$I_{out}$  : 0 %

$T_a$  : 25 °C

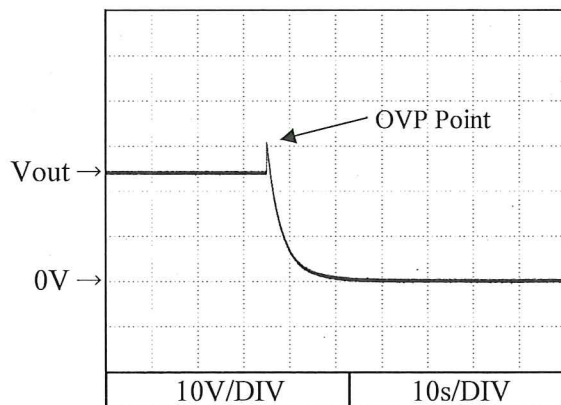
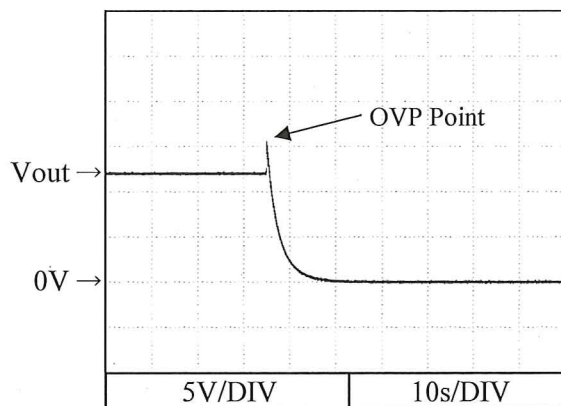
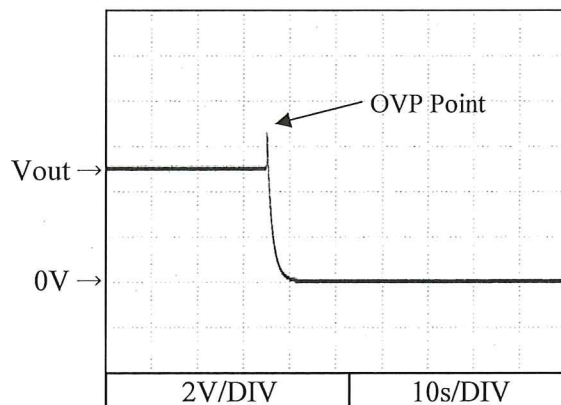




## 2.8 過渡応答 (負荷急変) 特性

Dynamic load response characteristics







Conditions  $V_{in}$  : 110 VAC  
 $I_{out}$  : 50 %  $\leftrightarrow$  100 %  
 (tr = tf = 50us)  
 $T_a$  : 25 °C

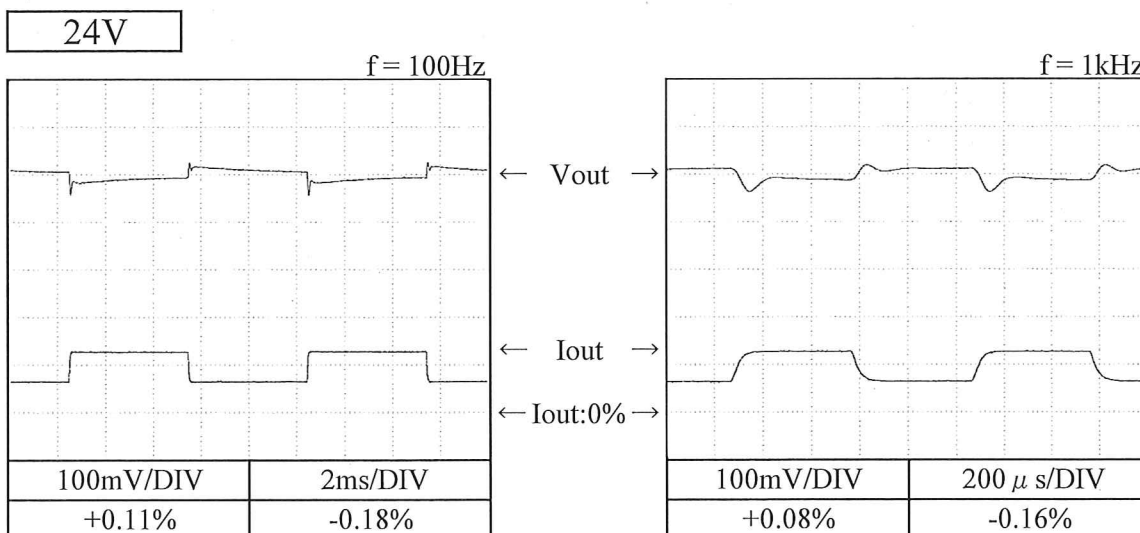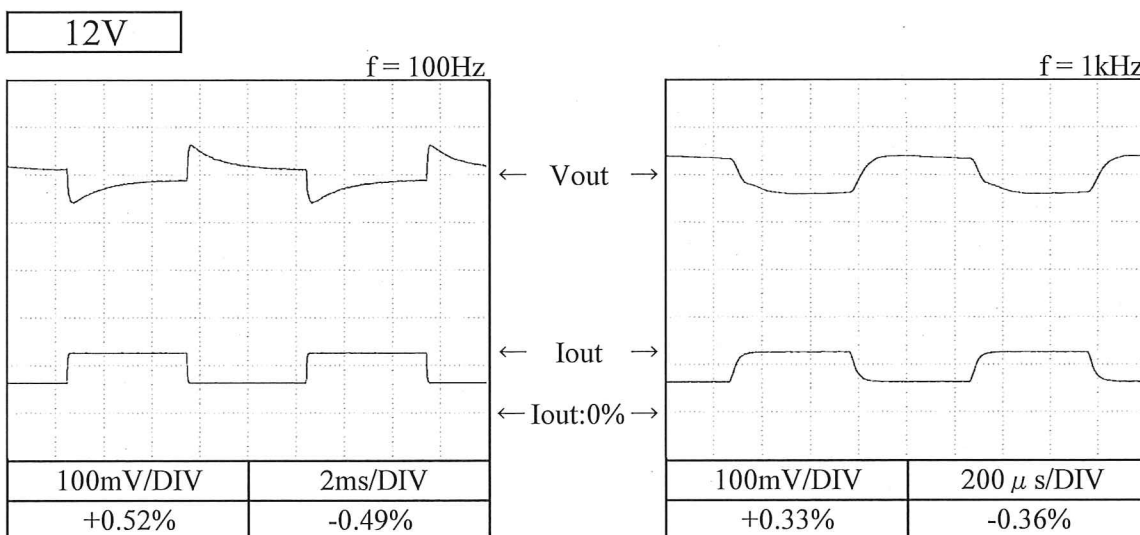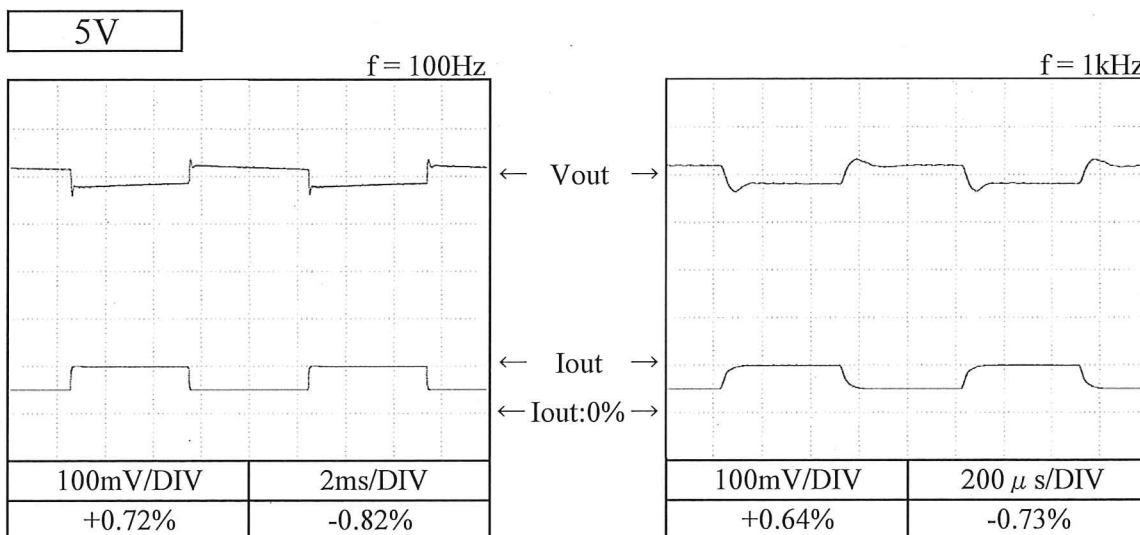

## 2.9 入力電圧瞬停特性

Response to brown out characteristics

Conditions  $T_a$  : 25 °C  
 $I_{out}$  : Full load

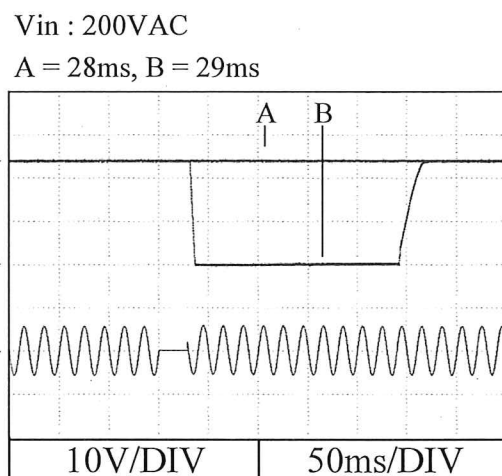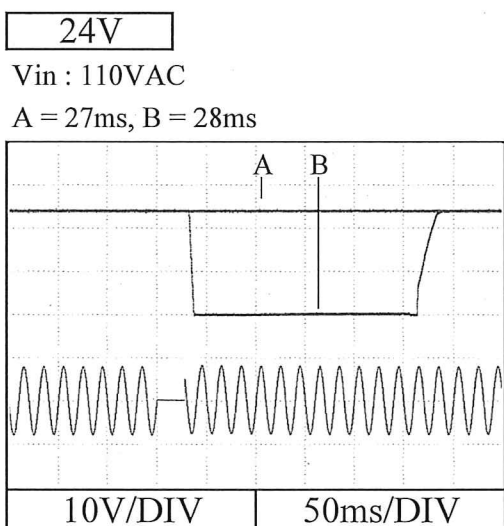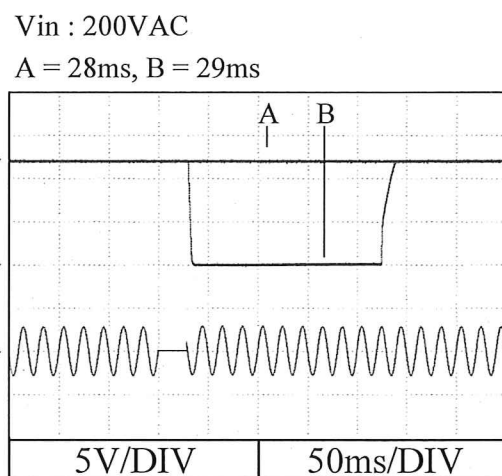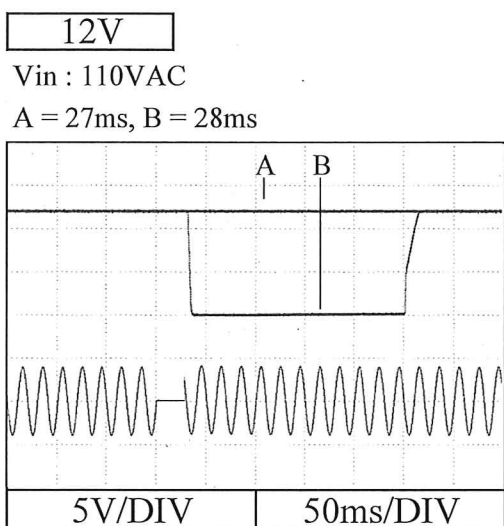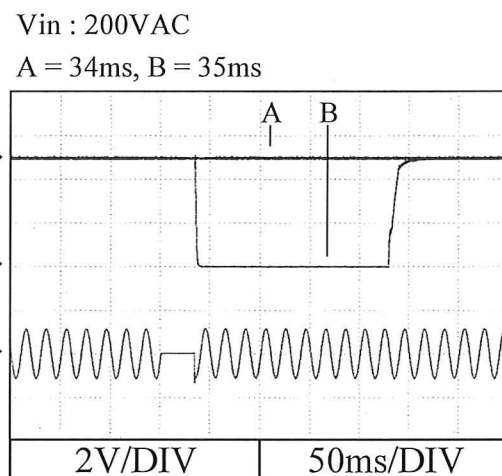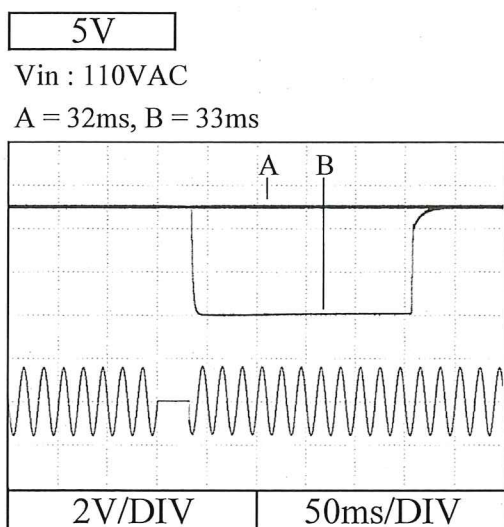


2.10 入力サージ電流 (突入電流) 波形  
Inrush current waveform


12V

Conditions Vin : 100 VAC  
Iout : Full load  
Ta : 25 °C

Switch on phase angle of input AC voltage  
 $\phi = 0^\circ$

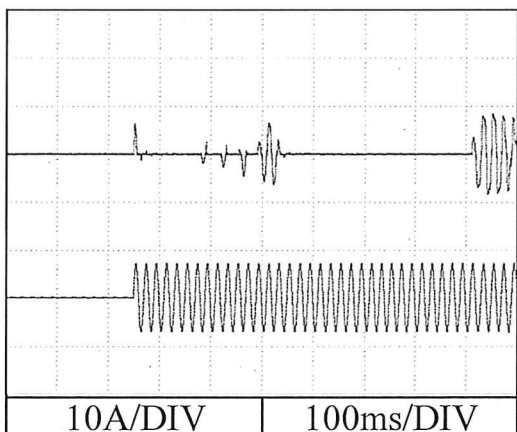


Switch on phase angle of input AC voltage  
 $\phi = 90^\circ$

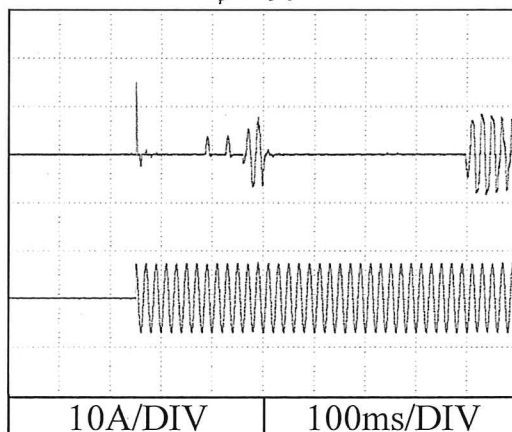


Conditions Vin : 200 VAC  
Iout : Full load  
Ta : 25 °C

Switch on phase angle of input AC voltage  
 $\phi = 0^\circ$

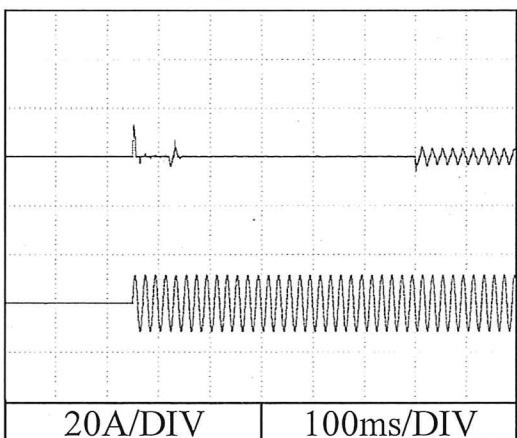

Switch on phase angle of input AC voltage  
 $\phi = 90^\circ$


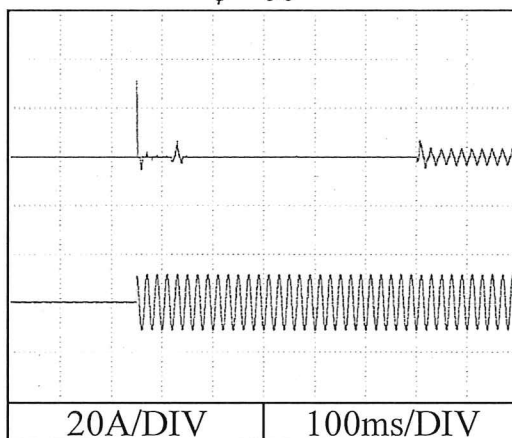


2.11 高調波成分

Input current harmonics

Conditions Iout : Full load  
Ta : 25 °C

12V

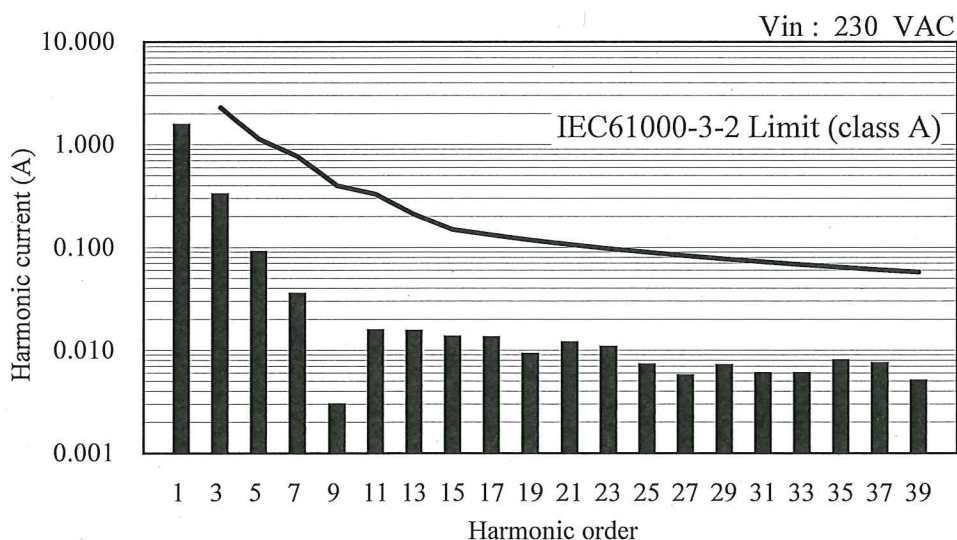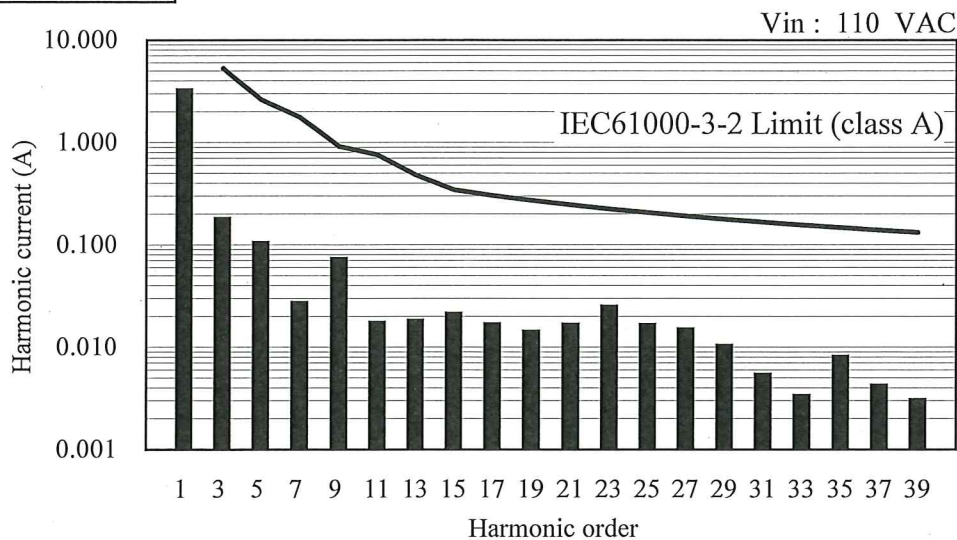


2.12 入力電流波形

Input current waveform

Conditions Iout : Full load  
Ta : 25 °C

12V

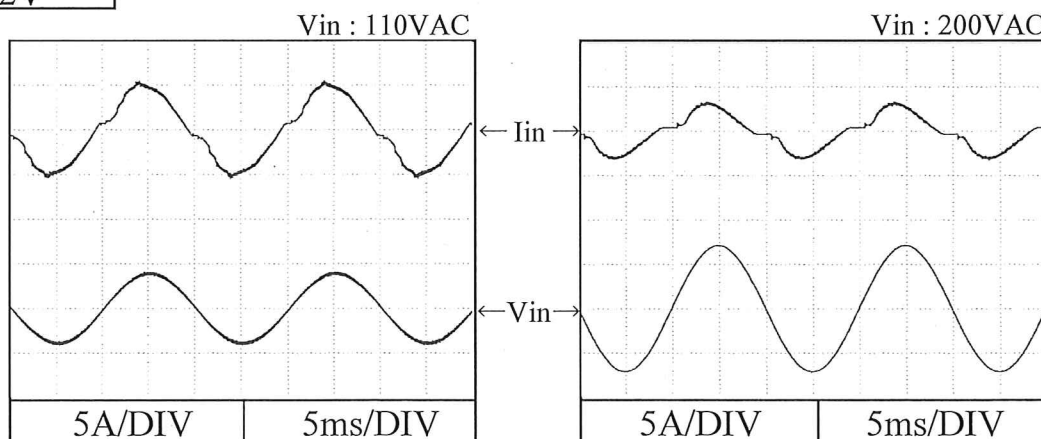


## 2.13 リーク電流特性 Leakage current characteristics


Conditions Iout : 0 % —  
Full load - - -  
Ta : 25 °C  
Equipment used : 3156 (HIOKI)

12V

f: 50 Hz

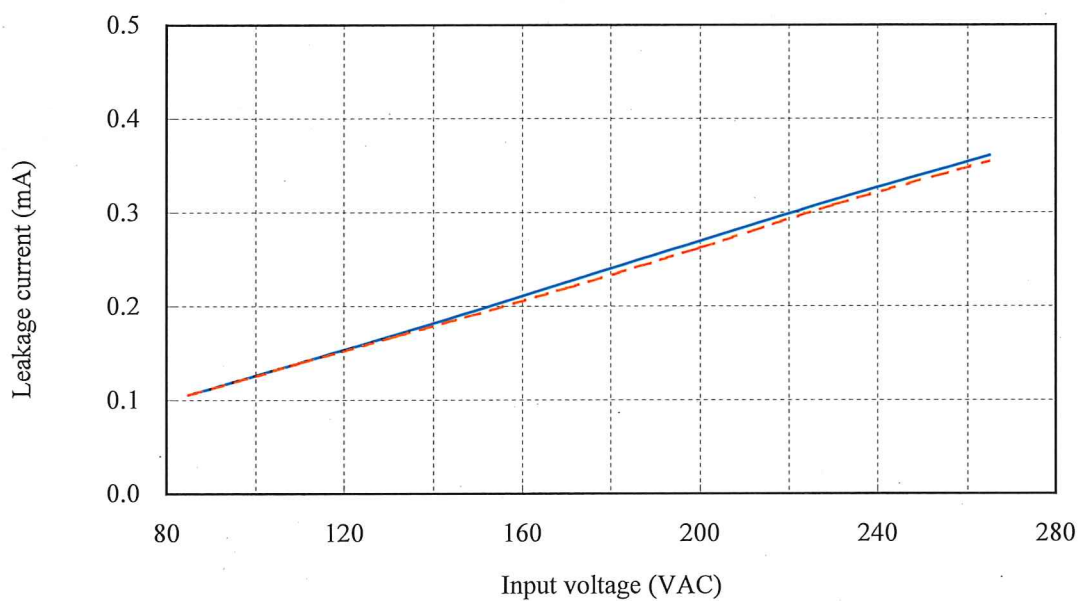


f: 60 Hz

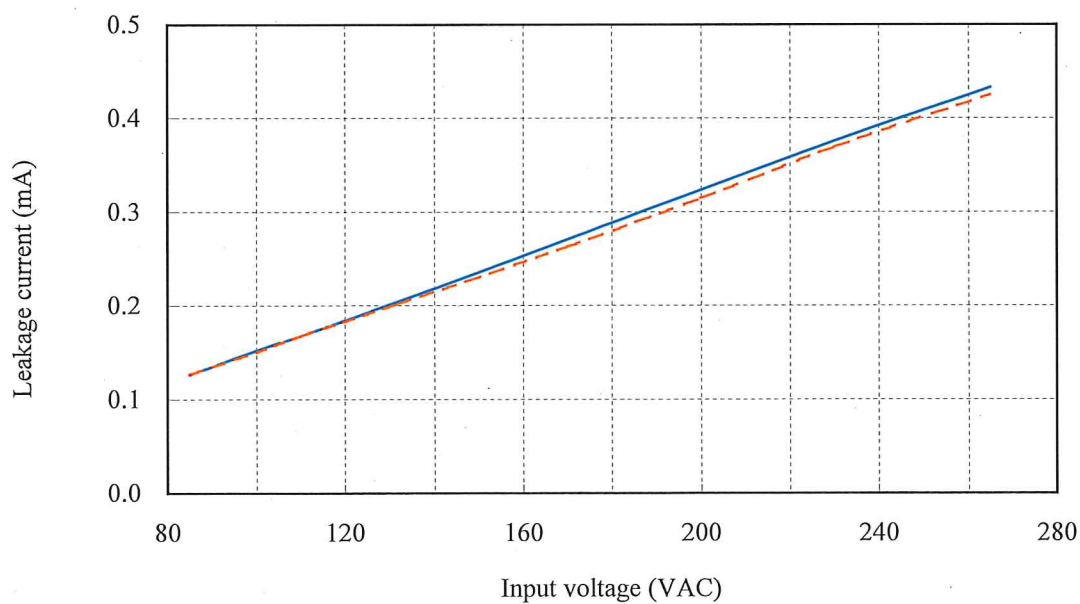


2.14 出力リップル、ノイズ波形  
Output ripple and noise waveform

Conditions Vin : 110 VAC  
Iout : Full load  
Ta : 25 °C


5V

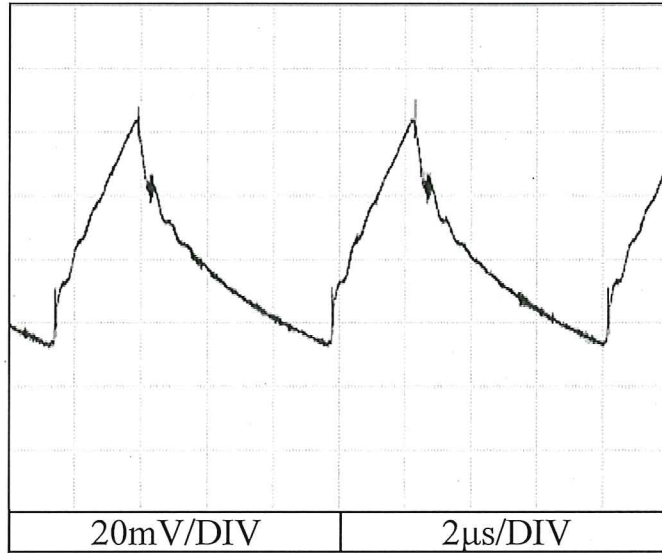

12V

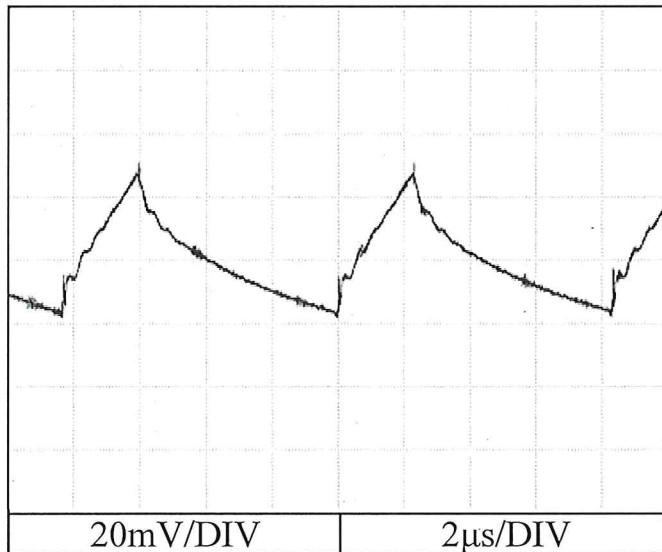

24V

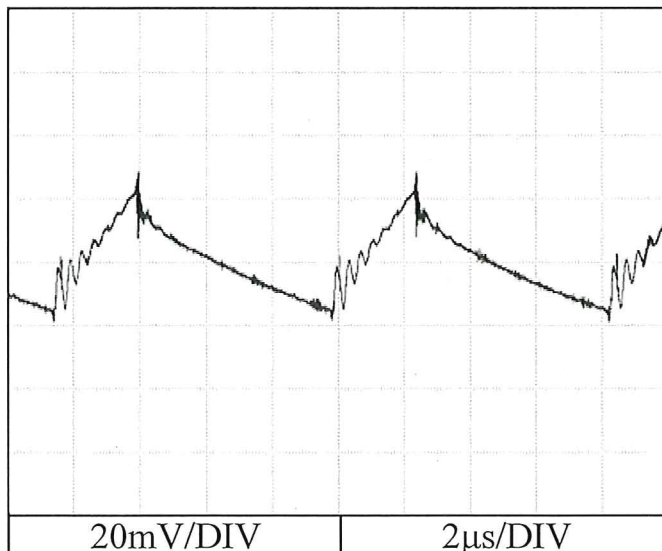

## 2.15 EMI 特性

Electro-Magnetic Interference characteristics

Conditions Vin : 230 VAC  
Iout : Full load  
Ta : 25 °C


雑音端子電圧

Conducted Emission

5V


Phase : N

Ref. Data	Point A (238kHz)	
	Limit (dB)	Measure (dB)
QP	62.2	51.3
AV	52.2	39.7

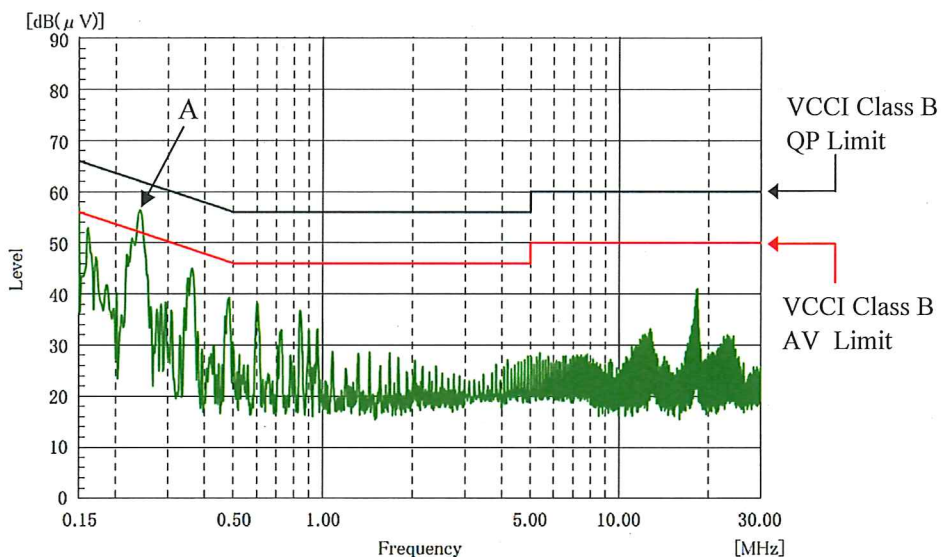

Phase : L

Ref. Data	Point B (243kHz)	
	Limit (dB)	Measure (dB)
QP	62.0	54.1
AV	52.0	48.1

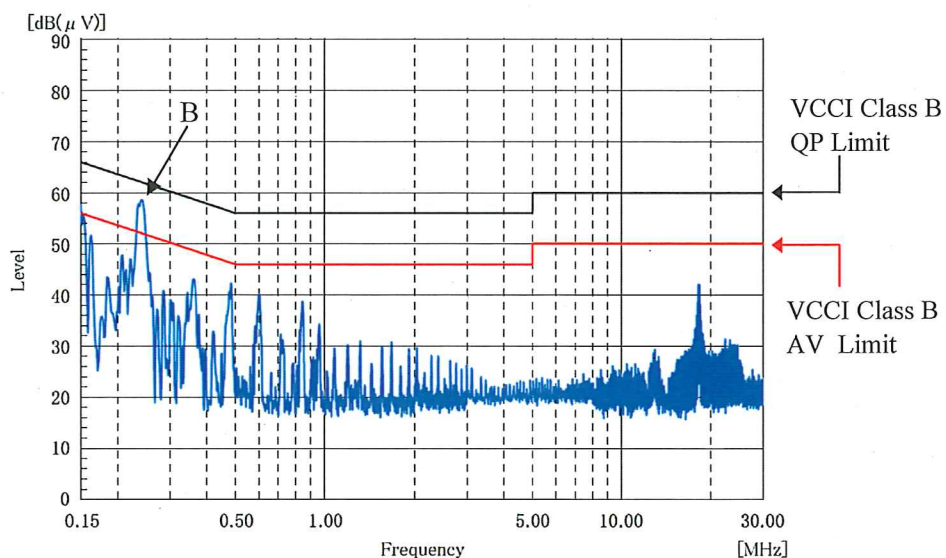

EN55011-B,EN55022-B,FCC-Bの限界値はVCCI class Bの限界値と同じ  
Limit of EN55011-B,EN55022-B,FCC-B are same as its VCCI class B.

## 2.15 EMI 特性

Electro-Magnetic Interference characteristics

Conditions Vin : 230 VAC  
Iout : Full load  
Ta : 25 °C


雑音端子電圧

Conducted Emission

12V


Phase : N

Point A (241kHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	62.0	52.0
AV	52.0	44.0

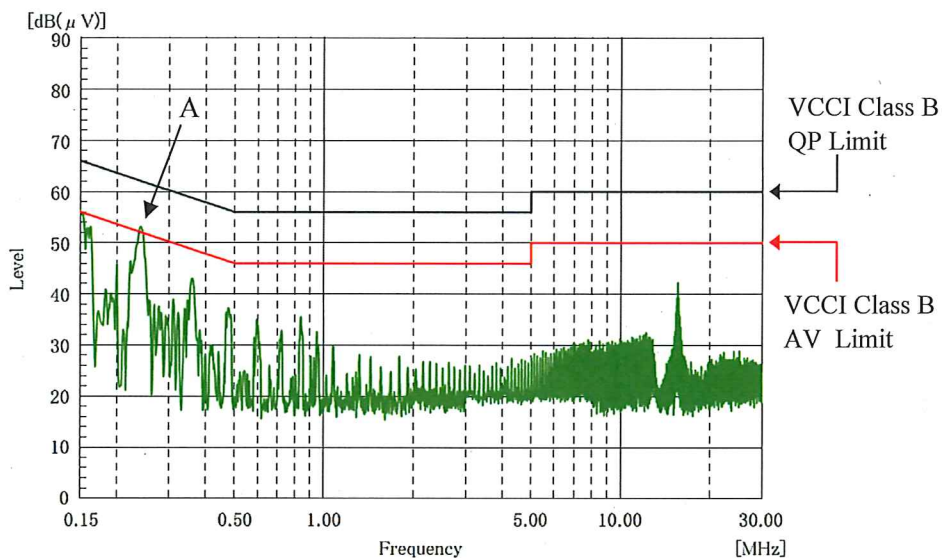

Phase : L

Point B (242kHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	62.0	52.7
AV	52.0	48.1

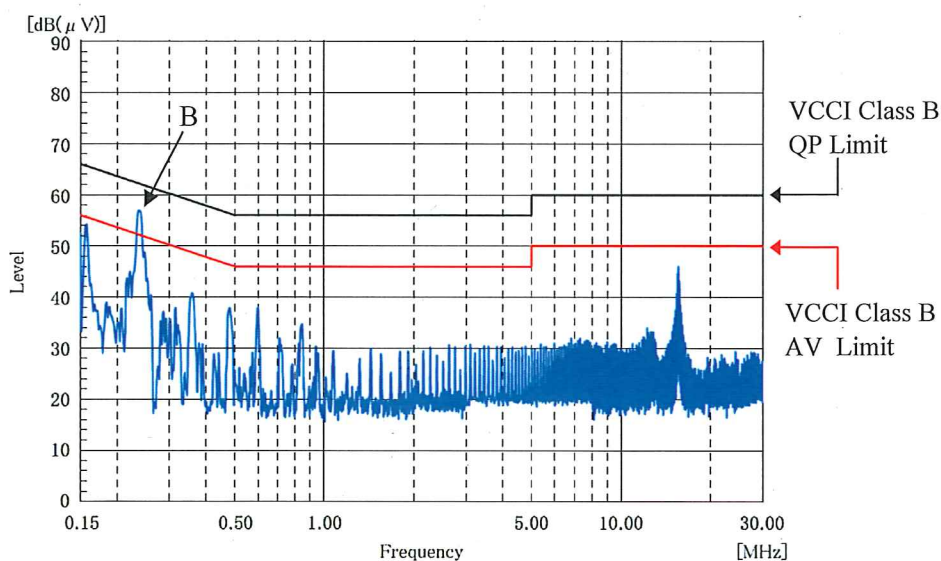

EN55011-B, EN55022-B, FCC-Bの限界値はVCCI class Bの限界値と同じ  
Limit of EN55011-B, EN55022-B, FCC-B are same as its VCCI class B.



## 2.15 EMI 特性

Electro-Magnetic Interference characteristics

Conditions  $V_{in}$  : 230 VAC

$I_{out}$  : Full load

$T_a$  : 25 °C


雑音端子電圧

Conducted Emission

24V


Phase : N

Point A (235kHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	62.3	51.4
AV	52.3	42.1

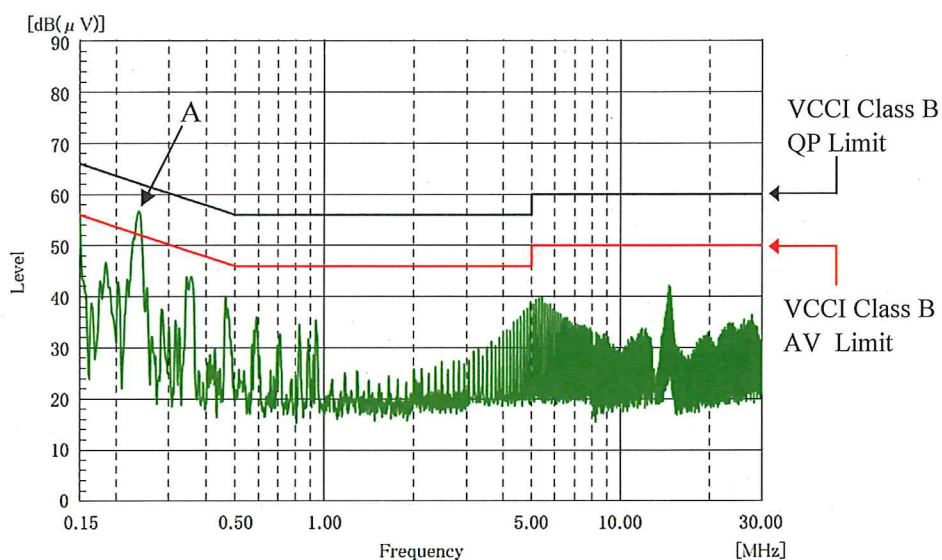

Phase : L

Point B (236kHz)		
Ref. Data	Limit (dB)	Measure (dB)
QP	62.2	52.7
AV	52.2	47.4

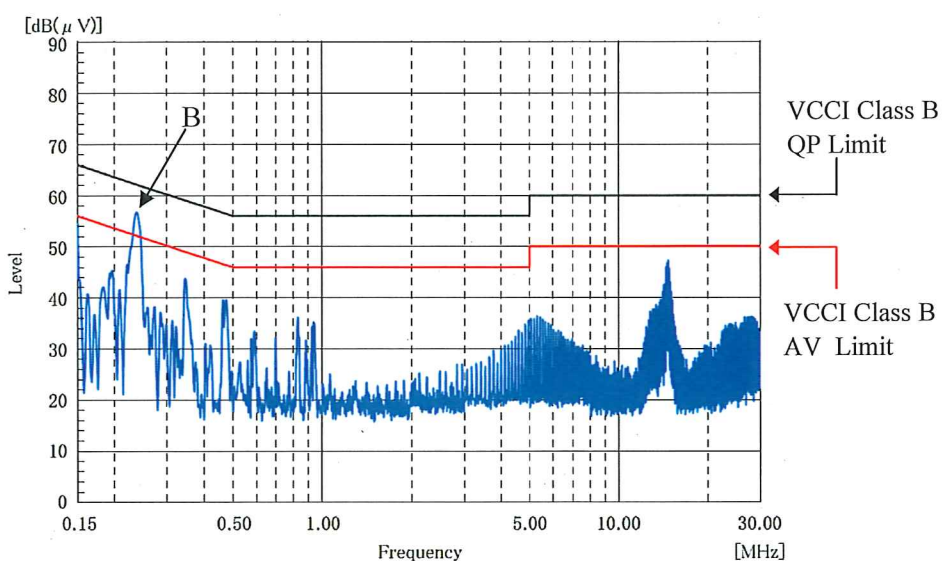


EN55011-B,EN55022-B,FCC-Bの限界値はVCCI class Bの限界値と同じ  
Limit of EN55011-B,EN55022-B,FCC-B are same as its VCCI class B.

## 2.15 EMI 特性 Electro-Magnetic Interference characteristics

Conditions Vin : 230 VAC  
Iout : Full load  
Ta : 25 °C

雑音電界強度  
Radiated Emission

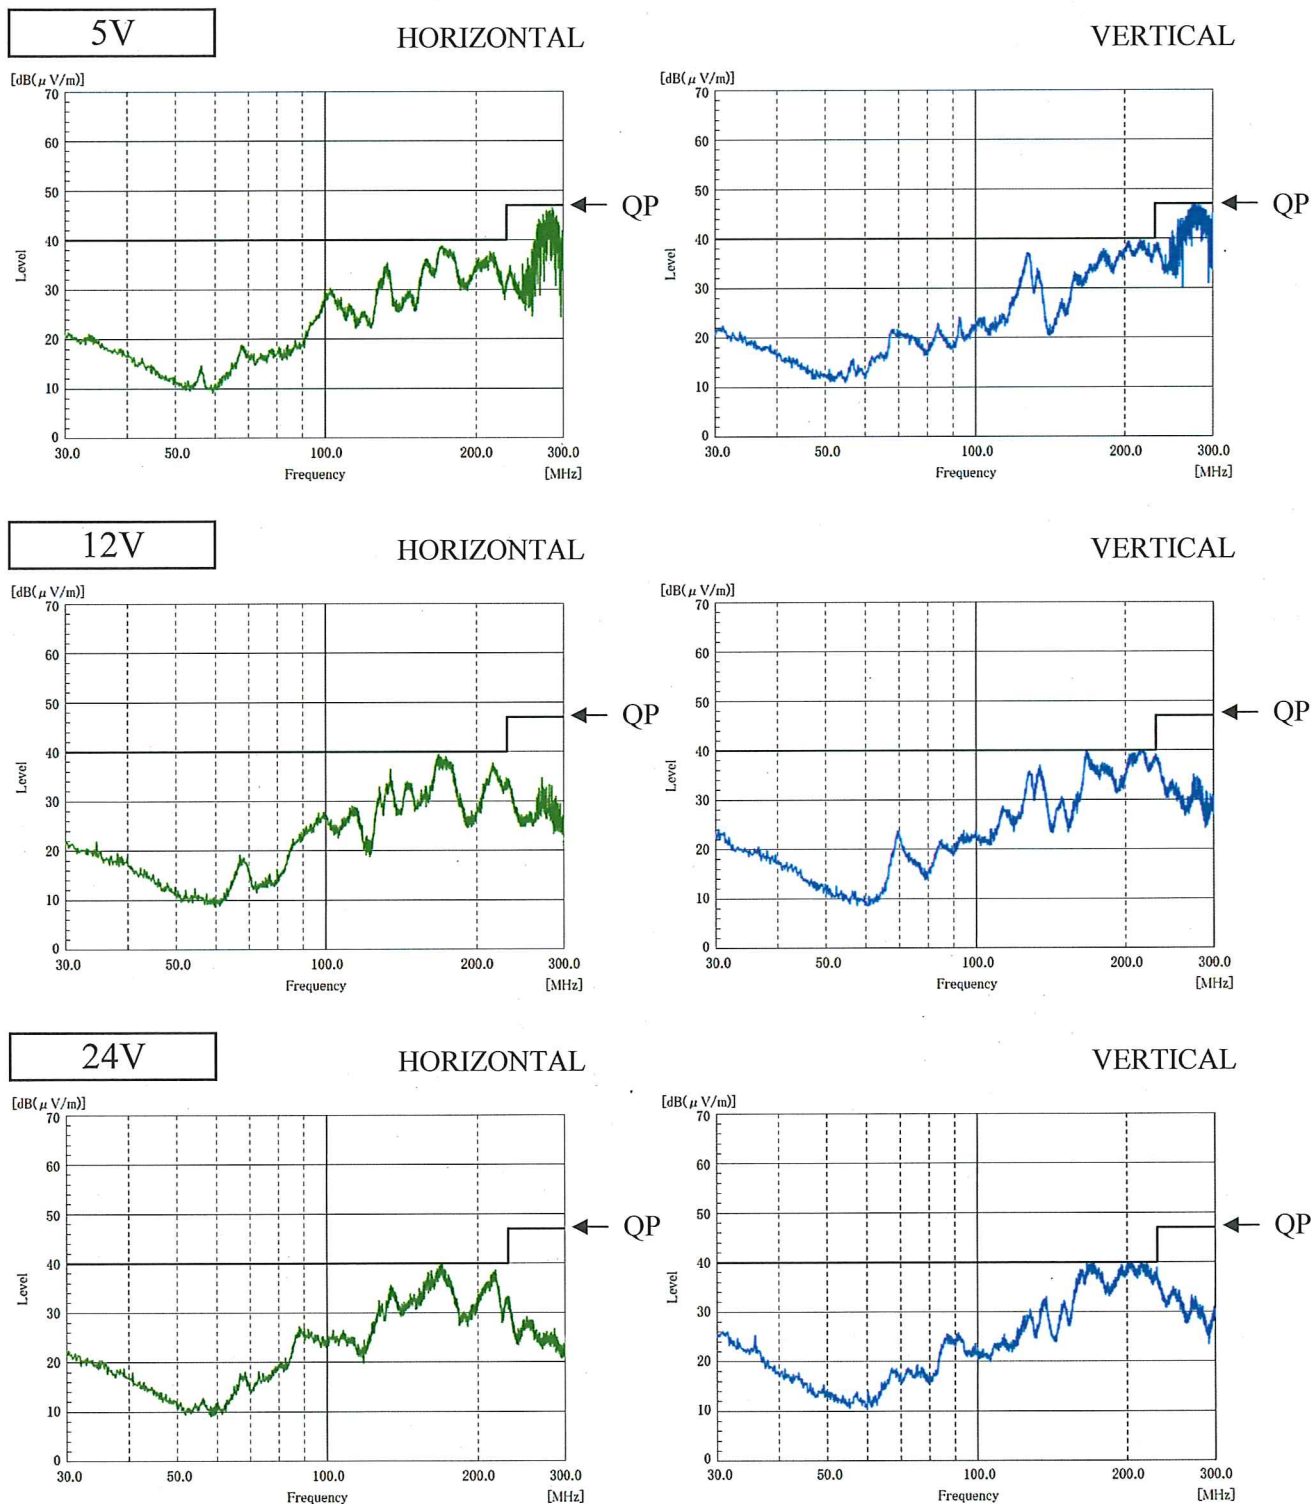

EN55011-B,EN55022-Bの限界値はVCCI class Bの限界値と同じ  
Limit of EN55011-B,EN55022-B are same as its VCCI class B.

表示はピーク値  
Indication is peak values.