

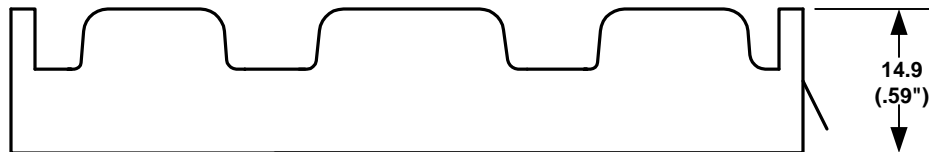


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.

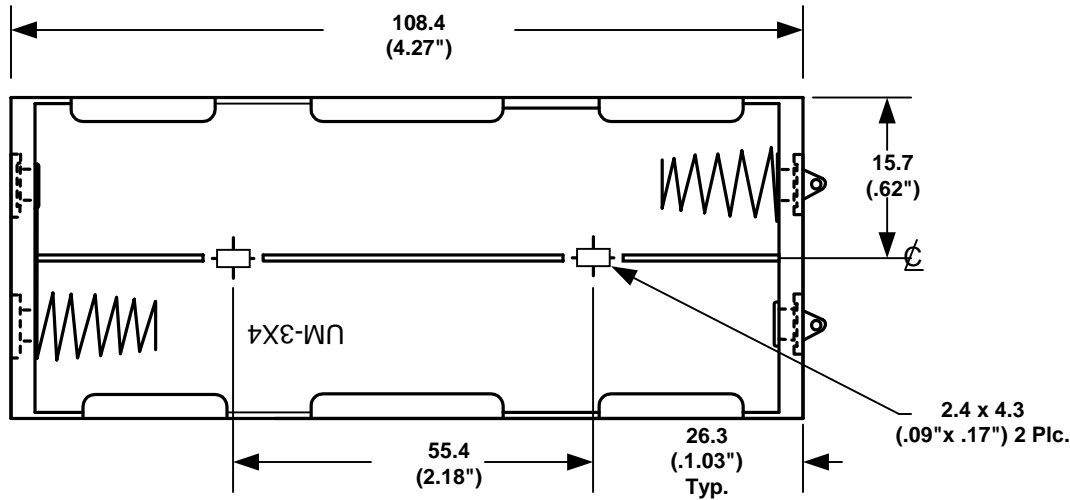

SOLDER LUGS SHOWN ABOVE


ORDERING CODE **BH34AA**

SPECIFICATIONS :

Plastic material - polypropylene
 Springs - nickel plated spring steel
 Wire - 152.4 mm Ref. Long 26 AWG,
 UL1007, CSA - TR-64, 300V, 80°C.
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated

SOLDER LUGS	= L
(6") WIRE LEADS	= W
9 VOLT TYPE SNAPS	= SF

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL + .5 (.020") - .5 (.020")	SCALE NONE	DRAWN BY S.C.	
FRACTIONAL + .8 (.030") - .8 (.030")	TITLE FOUR "AA" CELL HOLDER		
ANGULAR + 3° - 3°	DATE 01/29/2001	DRAWING NUMBER BH34AAL	
APPROVED BY			