
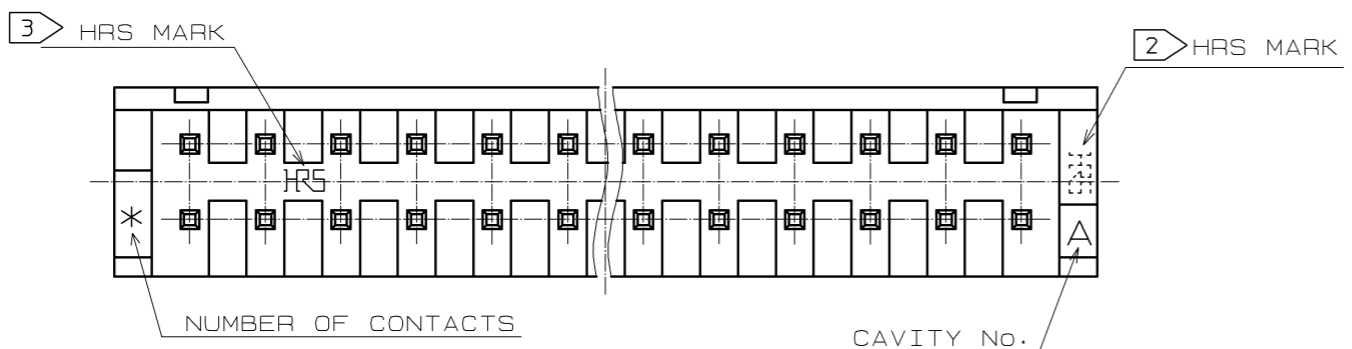


CL NO.	PART NO.	NUMBER OF CONTACT	A	B
-	DF11- 4DP-2DSA(89)	4	6.0	2.0
CL543-0518-8-89	DF11- 6DP-2DSA(89)	6	8.0	4.0
-	DF11- 8DP-2DSA(89)	8	10.0	6.0
-	DF11-10DP-2DSA(89)	10	12.0	8.0
-	DF11-12DP-2DSA(89)	12	14.0	10.0
CL543-0522-5-89	DF11-14DP-2DSA(89)	14	16.0	12.0
-	DF11-16DP-2DSA(89)	16	18.0	14.0
-	DF11-18DP-2DSA(89)	18	20.0	16.0
CL543-0525-3-08	DF11-20DP-2DSA(89)	20	22.0	18.0
-	DF11-22DP-2DSA(89)	22	24.0	20.0
-	DF11-24DP-2DSA(89)	24	26.0	22.0
-	DF11-26DP-2DSA(89)	26	28.0	24.0
-	DF11-28DP-2DSA(89)	28	30.0	26.0
CL543-0530-3-89	DF11-30DP-2DSA(89)	30	32.0	28.0
-	DF11-32DP-2DSA(89)	32	34.0	30.0

RECOMMENDED PATTERN (BOARD THICKNESS t=1.6mm)

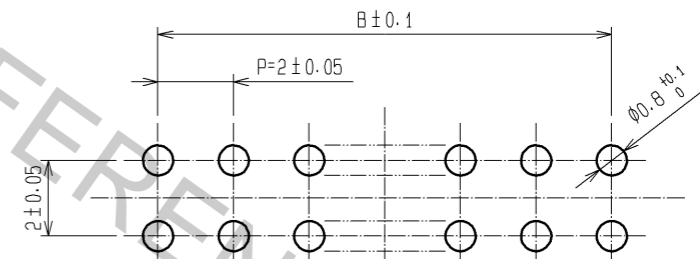

- NOTES 1 : 100 PIECES PER PACK.
 2 : HRS MARK OF 4 OR 6 CONTACTS ARE INDICATED IN APPROXIMAL POSITION SHOWN.
 3 : IF MORE THAN 8 CONTACTS, HRS MARK ARE INDICATED IN APPROXIMAL POSITION SHOWN.

1	POLYAMIDE	WHITE, UL94V-0	2	BRASS	SURFACE:TIN PLATING 1μm min UNDER PLATING:NICKEL PLATED 0.5μm min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : TS. SAKATA 09.06.01	DRAWING NO. EDC3-162402-01		CHECKED
		CHECKED : TS. FUKUSHIMA 09.06.01	PART NO. DF11- *DP-2DSA(89)		DATE
		DESIGNED : TH. YOSHIZAWA 09.06.01	CODE NO. CL543-		
		DRAWN : YK. NAKATSU 09.05.29			