



Units: mm

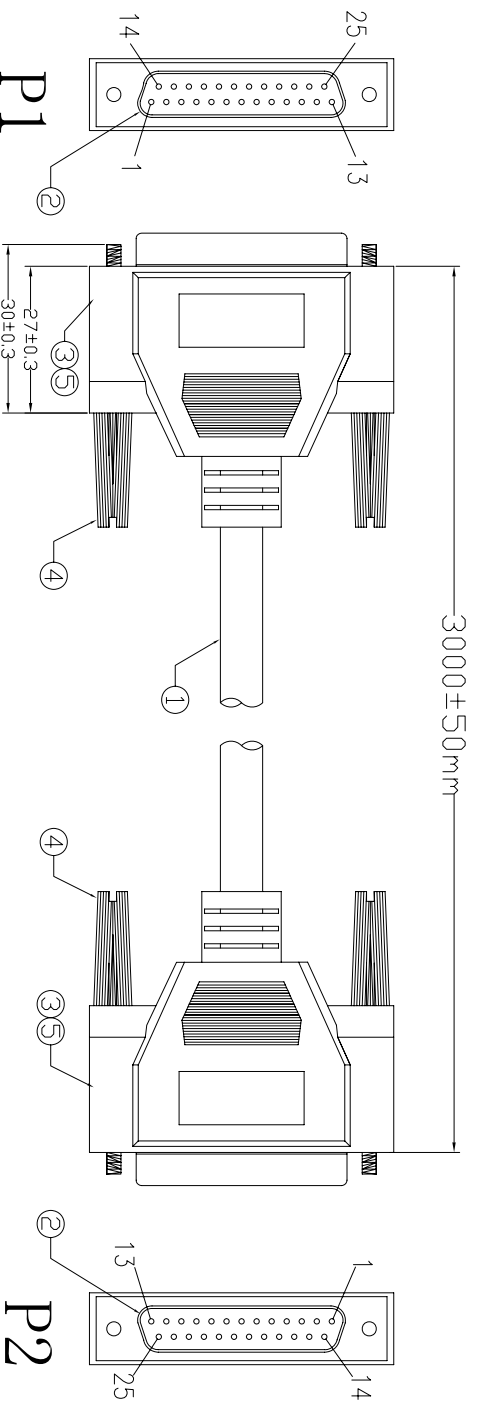

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

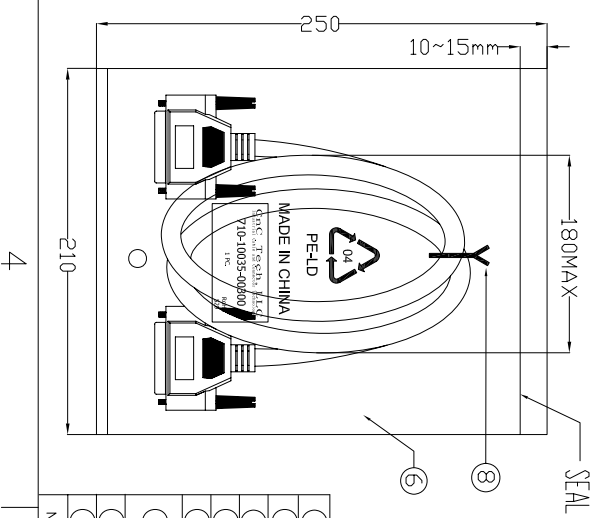

NO.	TIE	QTY	NAME	SPECIFICATION
⑧	1	1	WHITE L=120mm	
⑦	1/5		CLEAR SIZE: 360*380*0.05mm PRINT BLACK"MADE IN CHINA"+ "5PCS"	
⑥	1		CLEAR SIZE: 210*250*0.05mm PRINT BLACK"MADE IN CHINA"+ "1PC"	
⑤	2		HEAT SHRINK TUBE BLACK OD1.5*20MM	
④	4		#4-40UNC TYPE L=30mm,NICKEL PLATED,MOLD:BEIGE(V-29) ABS	
③	18g		CLEAR LD-PE (Mould NO.:MM-33)	
②	60g		BEIGE(V-29) 40P PVC(Mould NO:MM-017)	
①	2		DB 25P FEMALE SODER TYPE PIN G/F SHELL N-PLATED INSULATOR COLOR:BLUE	
①	1		NOUL 28AWG(7.0:1.2)*25C+D+AL/RY 007.5mm JACKET BEIGE(V-29) L=3000±15MM	

PIN ASSIGNMENT		
P1	1	P2
	2	
	3	
	4	
	5	
	6	
	7	
	8	
	9	
	10	
	11	
	12	
	13	
	14	
	15	
	16	
	17	
	18	
	19	
	20	
	21	
	22	
	23	
	24	
	25	
SHELL		SHELL

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	YIFONG	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	710-10035-00300
DECIDE BY		DATE	2012-02-06
VERSIONS/EDITION	A/0	PROJECTION	