



240 (L) x 97.5 (W) x 31.7 (H) mm

DPS-60AB-6

FEATURES

- Total Power 60W, peak 288W for 500uSec.
- 90-264Vac Auto Range Input
- Efficiency : Meet DoE level VI
- High Reliability : > 100,000 Hours @ 25 °C, 100Vac/ maximum load
- Protection : Short / Over-current / Over-voltage / Over-temperature
- Safety : CB/CE/UL/CUL/TUV-GS/CCC/C-TICK/FCC/BSMI/PSE
- EMI : CLASS B

Input	Voltage Range	90~264Vac Auto Range
	Frequency	47~63Hz
	Efficiency	The average efficiency at 25%, 50%, 75% and 100% load \geq 88%
	Input Current	100Vac/24V/2.5A load \leq 1.5A
Output	24V	0A ~ 2.5A
Protection	Over-current	Auto Recovery
	Over-temperature	Latch off
	Short	Auto Recovery
	Over-voltage	Latch off
Environment	Operating Temp.	0 to 40°C
	Storage Temp.	-20 to 80°C
	Operating Humidity	10% - 90%
	Storage Humidity	5% - 95%



DELTA ELECTRONICS, INC.
3, TUNG YUAN ROAD, CHUNGLI
INDUSTRIAL ZONE
TAOYUAN SHIEH, TAIWAN, R.O.C.
TEL: 886-3-4526107
FAX: 886-3-4527314
mail: powersales@delta.com.tw

DELTA PRODUCTS CORPORATION
4405 CUSHING PARKWAY
FREMONT, CA 94538, U.S.A.
TEL: 1-510-668-5100
FAX: 1-510-668-0680

DELTA ELECTRONICS(JAPAN) INC.
DELTA SHIBADAIMON BLDG.
2-1-14 SHIBADAIMON, MINATO-KU,
TOKYO, 105-0012, JAPAN
TEL: 81-3-5733-1111
FAX: 81-3-5733-1211

DELTA ELECTRONICS, EUROPE LTD.
2 YOUNG PLACE KELVIN
INDUSTRIAL ESTATE EAST KILBROIDE,
GLASGOW G75 0TD, U.K.
TEL: 44-1355-588888
FAX: 44-1355-588889

デルタ電子株式会社

The de-rating curve ambient temperature shown as Fig.1.


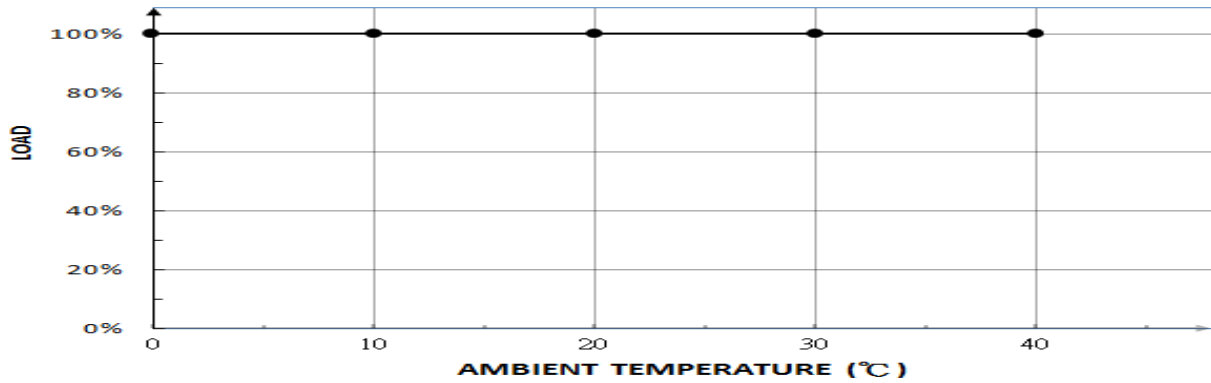


Fig.1 Ambient temperature to power de-rating curve

Size : (L x W x H)	132*60*31.5 mm
AC Input Connector	C14
DC Output Connector	TUNING FORK PLUG(2.5*5.5)

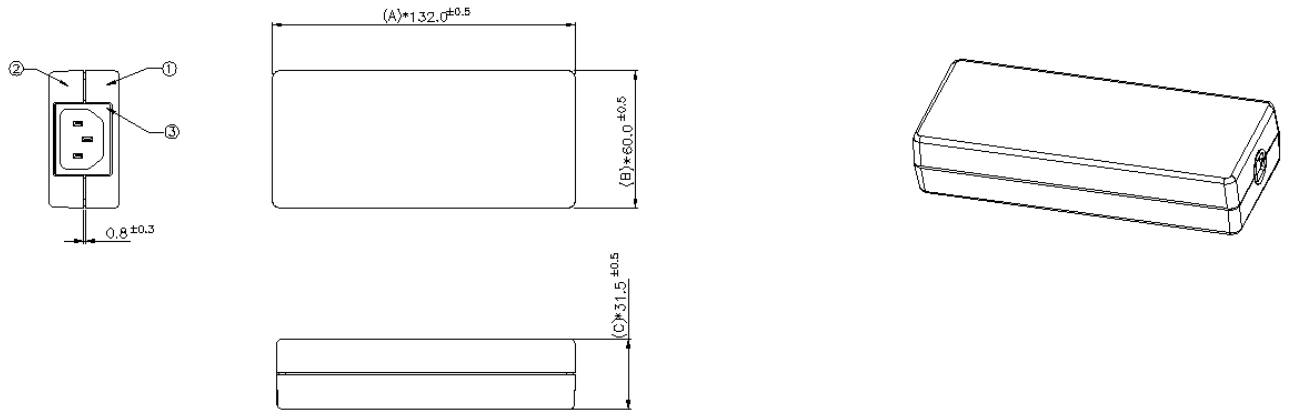

NOTES:
1.

ITEM	PART NAME	COLOR
①	COVER	BLACK
②	CHASSIS	BLACK
③	SOCKET ASS'Y	BLACK
④	LABEL	BLACK
⑤	POWER CORD	BLACK

2. "*" IS CRITICAL DIM WHICH MUST BE MEASURED.

