

MODEL NUMBER
CPL-5232-06-SMA-79

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: 2.0 to 18.0 GHz
- 1.2 FREQ. SENSITIVITY: ± 0.60 dB
- 1.3 COUPLING (INCLUDING FREQ. SENSITIVITY):
6dB ± 1.0 dB (MEASURED WITH RESPECT TO OUTPUT).
- 1.4 VSWR (MAX): 1.50:1
- 1.5 INSERTION LOSS: 0.8dB EXCLUDING COUP LOSS
2.00dB INCLUDING COUP LOSS

1.6 DIRECTIVITY:

- 2 to 12 GHz: 15dB MIN.
- 12 to 18 GHz: 12dB MIN.

1.7 POWER:

- AVG.: 20 WATTS
- PEAK: 3 KILOWATTS



1.8 RF IMPEDANCE: 50 OHMS

1.9 WEIGHT: 1.30 Oz. (36.9 GRAMS)

2.0 FINISHING:

- 2.1 GREY OVER MIL-E-15090 TYPE II, CLASS 2
OVER MIL-C-5541 CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400 AND MIL-E-16400V.
- 2.2 MARK UNIT AS SHOWN.

3.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS.

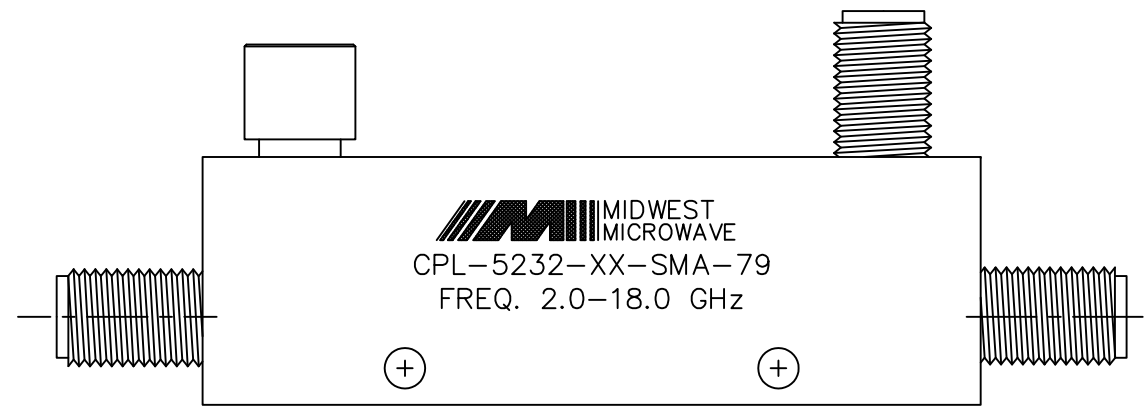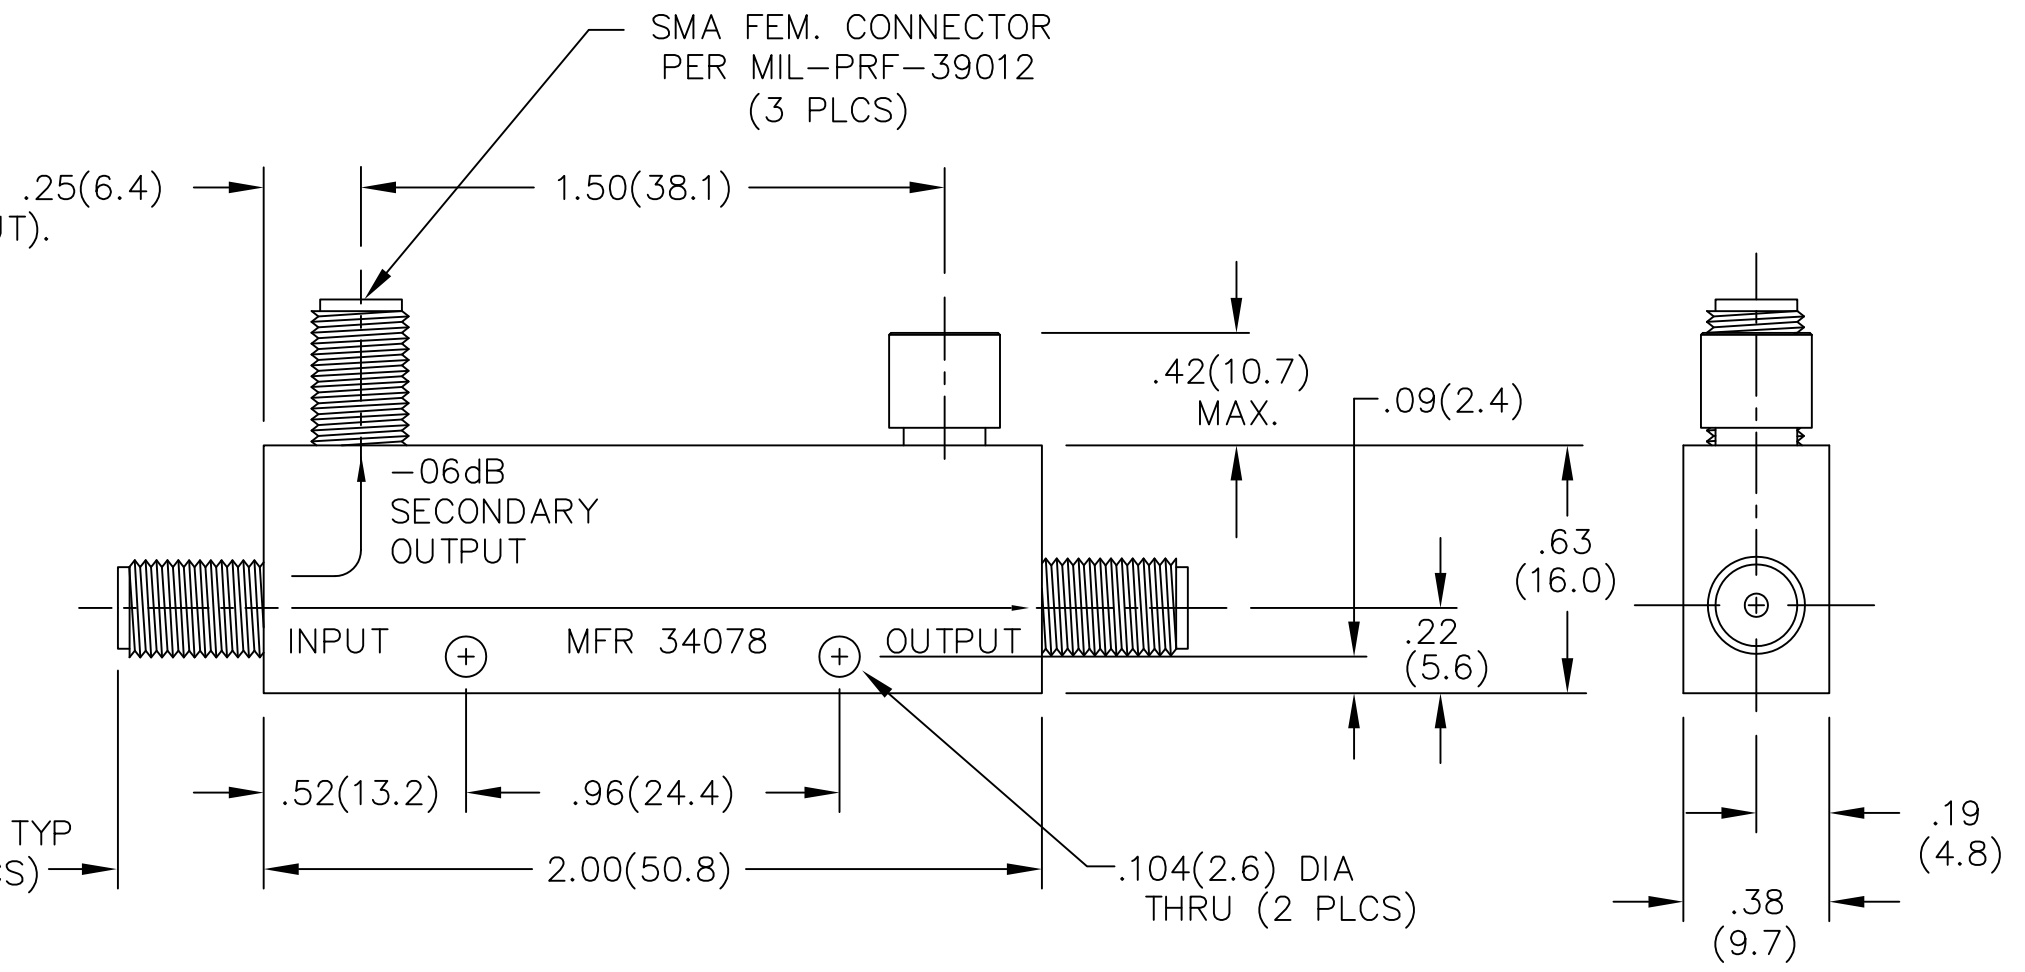

REV.	DESCRIPTION	DATE
I	RELEASED	12/12/91
A	ECN 11469	1/16/91
B	ECN 11655	3/12/92
B1	ADDED TITLEBLOCK	4/26/05
J	ECO 22344	11/09/10
K	ECO 24809	11/09/10

<p>NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.</p> <p>UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ± 0.005 2 PLACE DECIMALS ± 0.02 FRACTIONS $\pm 1/64$ PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: $\pm 1'$</p>	<p>CAGE CODE 34078</p>	<p>MIDWEST MICROWAVE</p>	
	<p>EMERSON Network Power Connectivity Solutions</p>	<p>TITLE DIRECTIONAL COUPLER OUTLINE DRAWING</p>	
<p>DRAWN/DATE A.BEATTY 12/11/91</p>	<p>ENG./DATE P.GOODMAN 12/12/91</p>	<p>DRAWING NUMBER CPL-5232-06-SMA-79-01</p>	<p>REV. K</p>
<p>CHECKED/DATE A.CATALANO 12/11/91</p>	<p>APPROVED/DATE</p>	<p>SCALE: 2=1</p>	<p>SHEET 1 of 1</p>