

TCSD-08-D-02.00-01-N-R

TCSD SERIES

(2.00 mm) .0787"

TIGER EYE™ IDC SOCKET CABLE

Mates with:

TMM, TMMH, STMM, MMT, TW, MTMM, EHT, ETMM (-SR), ZSTMM

SPECIFICATIONS

For complete specifications see www.samtec.com?TCSD

- Insulator Material:** Black Glass Filled Polyester
- Contact:** BeCu
- Plating:** Au or Sn over 50 μ" (1.27 μm) Ni
- Wire:** 28 AWG 7/36 Stranded, Tinned, Copper with Gray PVC Insulator
- Current Rating (TCSD/STMM):** 2.8 A per pin (1 pin powered per row)
- Operating Temp Range:** -40 °C to +105 °C
- Lead Size Accepted:** (0.48 mm) .019" to (0.53 mm) .021"
- Contact Resistance:** 15 mΩ
- Insertion Depth:** (2.87 mm) .113" to (3.17 mm) .125"
- RoHS Compliant:** Yes

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



FILE NO. E111594








ALSO AVAILABLE (MOQ Required)

- Other sizes
 - Other platings
- Contact Samtec.

POLARIZING KEY

Specify PK-01-07 for polarizing key (Available in wheels of six each). Also polarizes SMM Series socket strips.

Note: TCSD Series assemblies are non-standard, non-returnable.

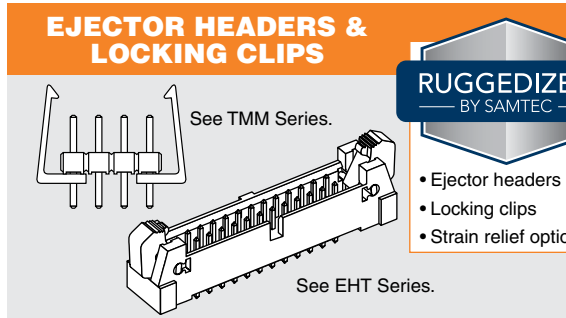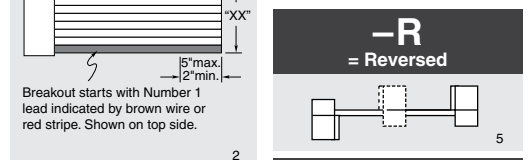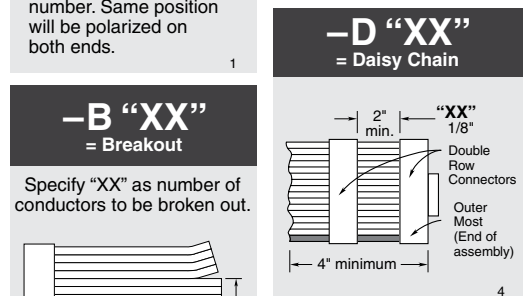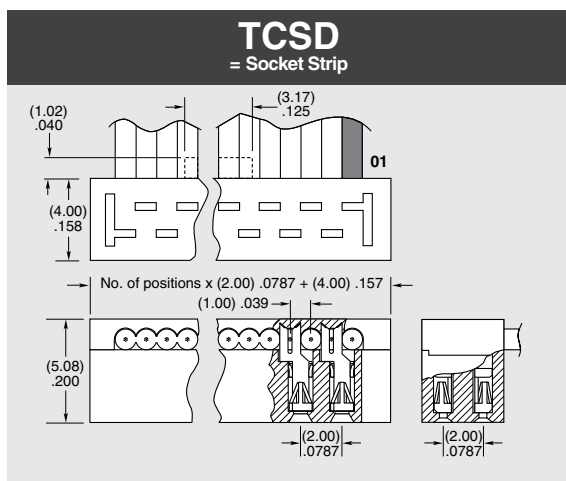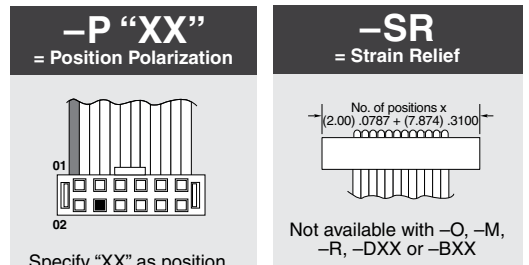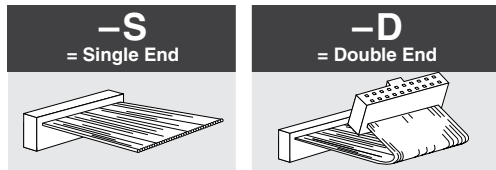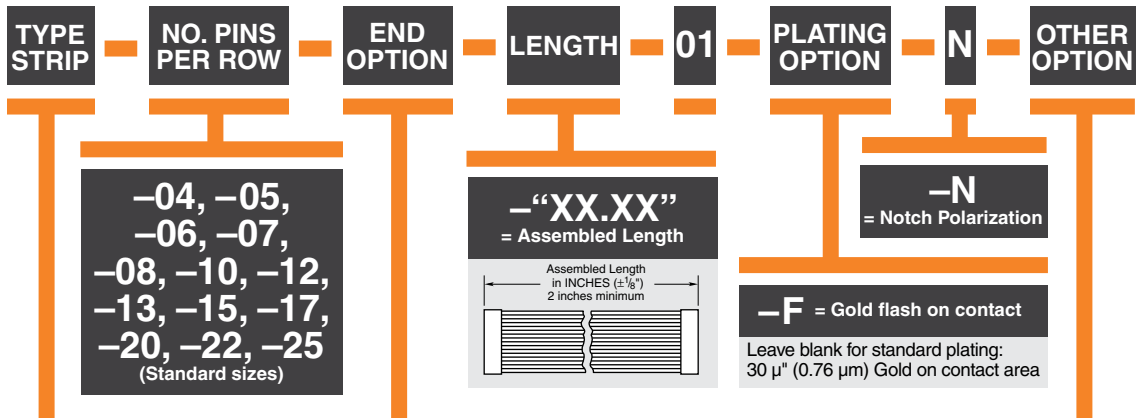

RUGGEDIZED BY SAMTEC

- Ejector headers
- Locking clips
- Strain relief option

