Alle Rechte vorbehalten/ *All rights reserved*

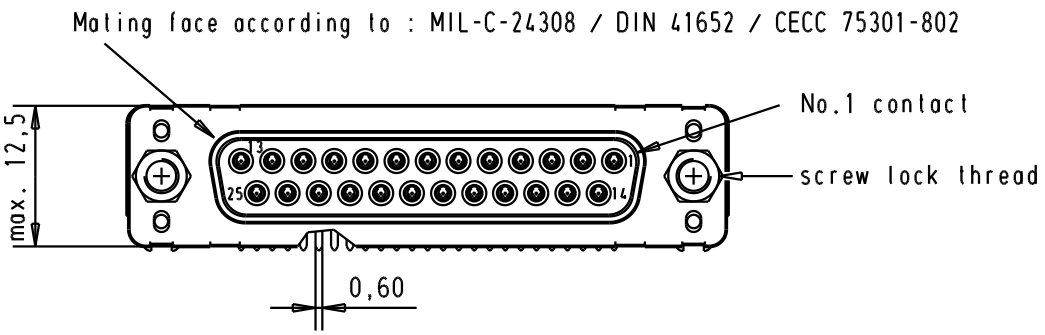

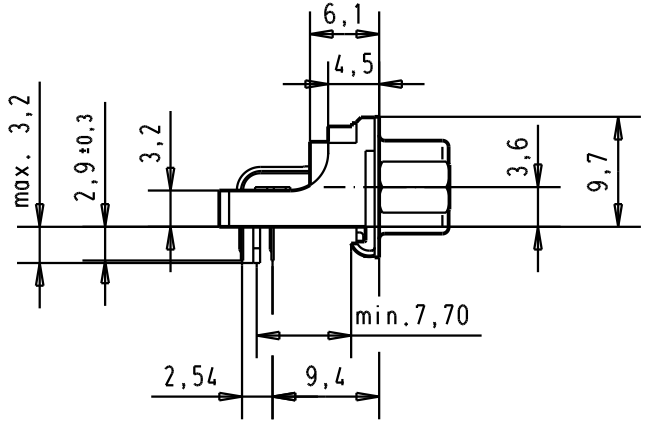

Printed board layout
component side

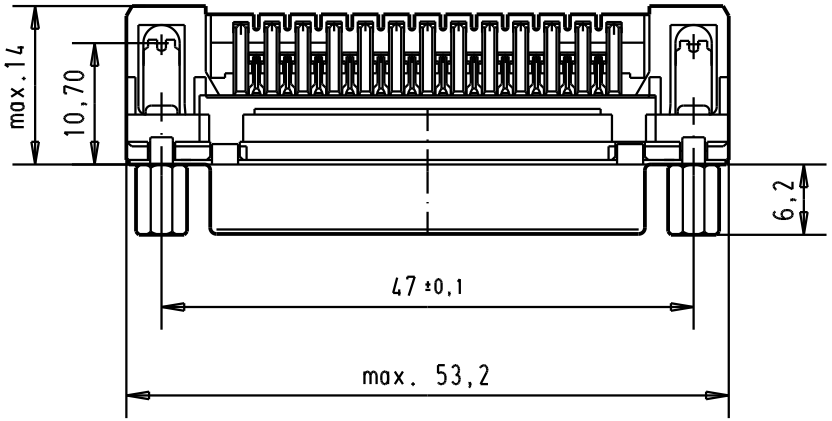

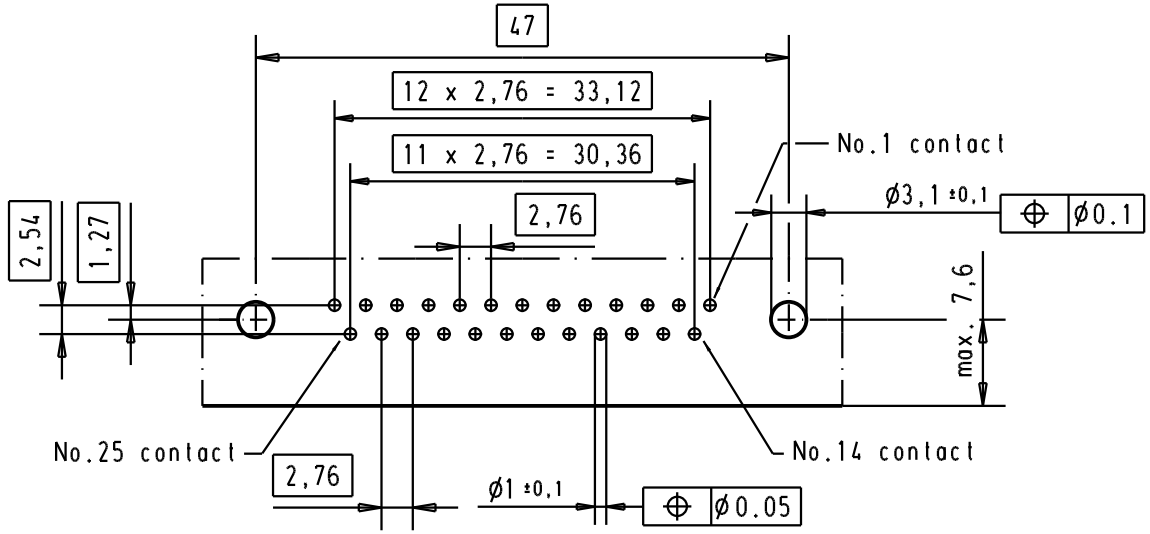

Connector retention and insertion forces on the PCB = 25 / 80 newtons

							Dat.	Name		D-Sub, high temperature, female, low profil, 25 poles with solder pins 2.9, screw lock and grounding board lock.	Maßstab/ *Scale*
						Detail.	05/03/02	CV	All Dim. in mm Orig. Size DIN A 4		1.5:1
						Insp.					
09 66 356 3617	4-40 UNC	1				Stand.					
09 66 356 6617	4-40 UNC	2	31892	05/05/04	JH	HARTING EURL F-95972 Paris				TB 0966356x61x	Blatt/ *Page* 5
09 66 356 7617	4-40 UNC	3	29723	05/03/02	CV					Sub.	
Part number	Screw lock thread	Performance level	Mod.	Dat.	Name						