NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: X100WBLK
   HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
   CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001" [0.000254] THICK MINIMUM.
   SPRING: STAINLESS STEEL TYPE 302.

2. P/N: X100WRED
   HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
   CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001" [0.000254] THICK MINIMUM.
   SPRING: STAINLESS STEEL TYPE 302.

3. P/N: 9230
   BODY & FITTINGS: BRASS. NICKEL PLATED.
   PIN: BRASS. GOLD PLATED.
   DIELECTRIC: PTFE.

4. P/N: 0480
   HOUSING: MOLDED DELRIN. BLACK.

5. P/N: W-500/0
   20AWG 105X40 TINNED COPPER
   0.080 [2.03] O.D. PVC INSULATION

6. P/N: W-500/2
   20AWG 105X40 TINNED COPPER
   0.080 [2.03] O.D. PVC INSULATION

7. PERFORMANCE:
   MAXIMUM CURRENT: 3.0 AMPS
   MAXIMUM VOLTAGE: 1000 W.V.D.C.
   MAXIMUM TEMPERATURE: 221°F [105°C]

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

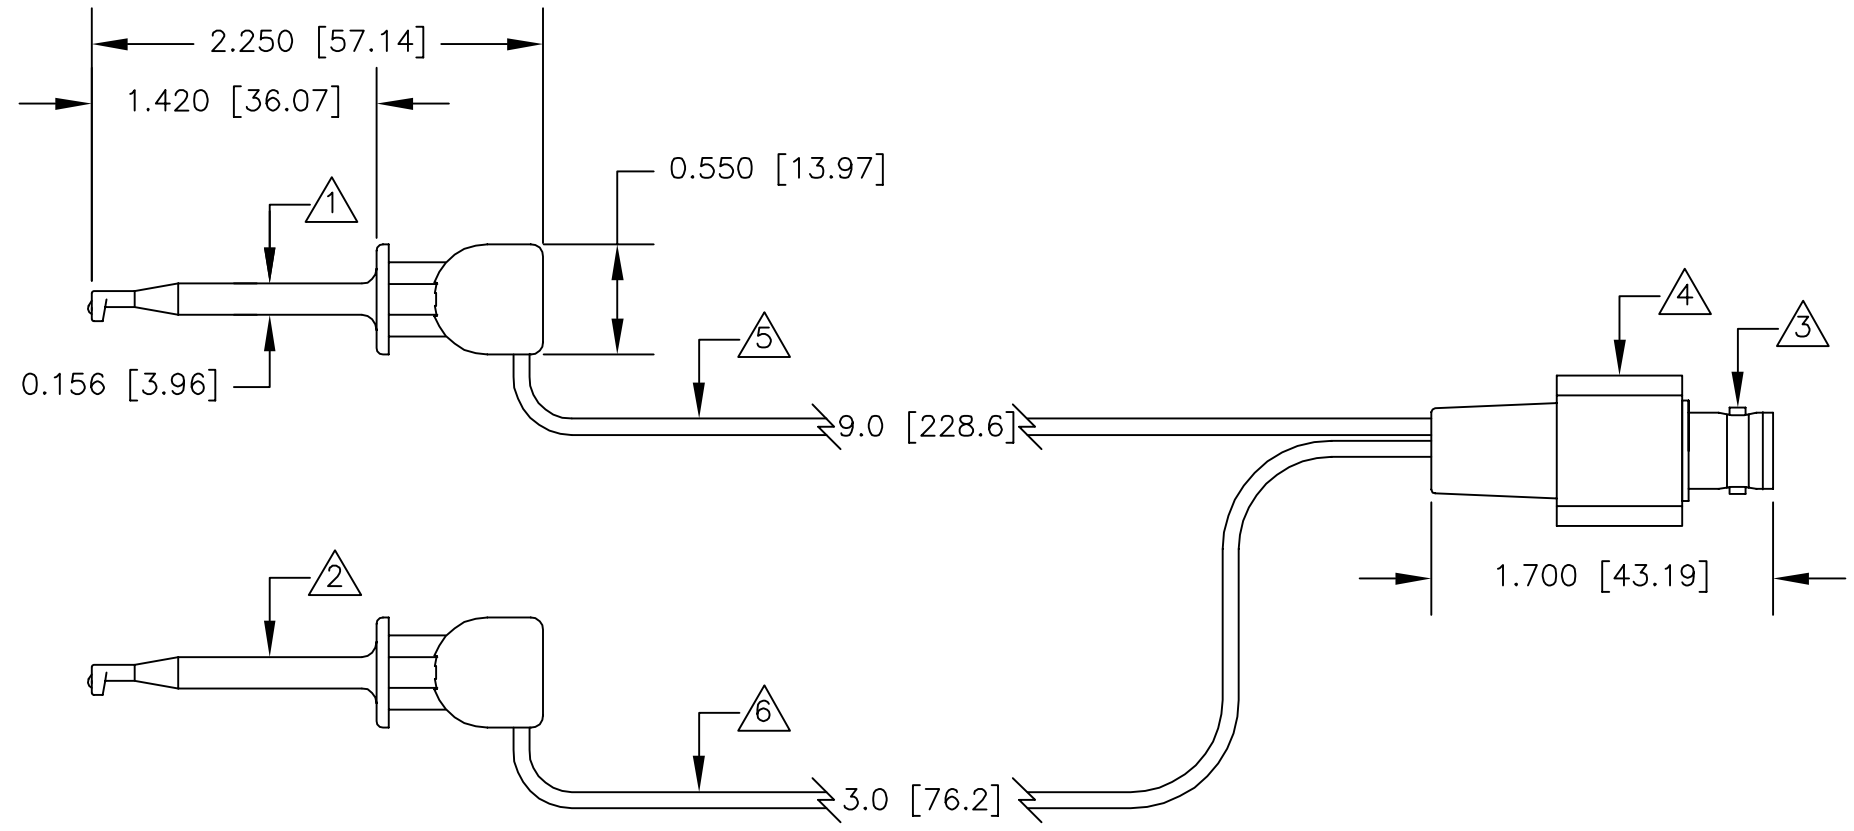

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ± .XX ± .XXX ± ANGLES ±	CONTRACT NO.		E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS	DATE	
			DRAWN R.L.	9/10	DESCRIPTION: BNC FEMALE (9230) ADAPTER TO MINI-HOOK'S (X100W)
		MATERIAL: SEE NOTE.	APPROVED BY		
		FINISH: SEE NOTE.			SIZE: B | CODE IDENT NO.: 08505 | DRAWING NO.: 1001 | REV.
NEXT ASSY	USED ON				SCALE: 1:1 | SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.