



UNIT:mm

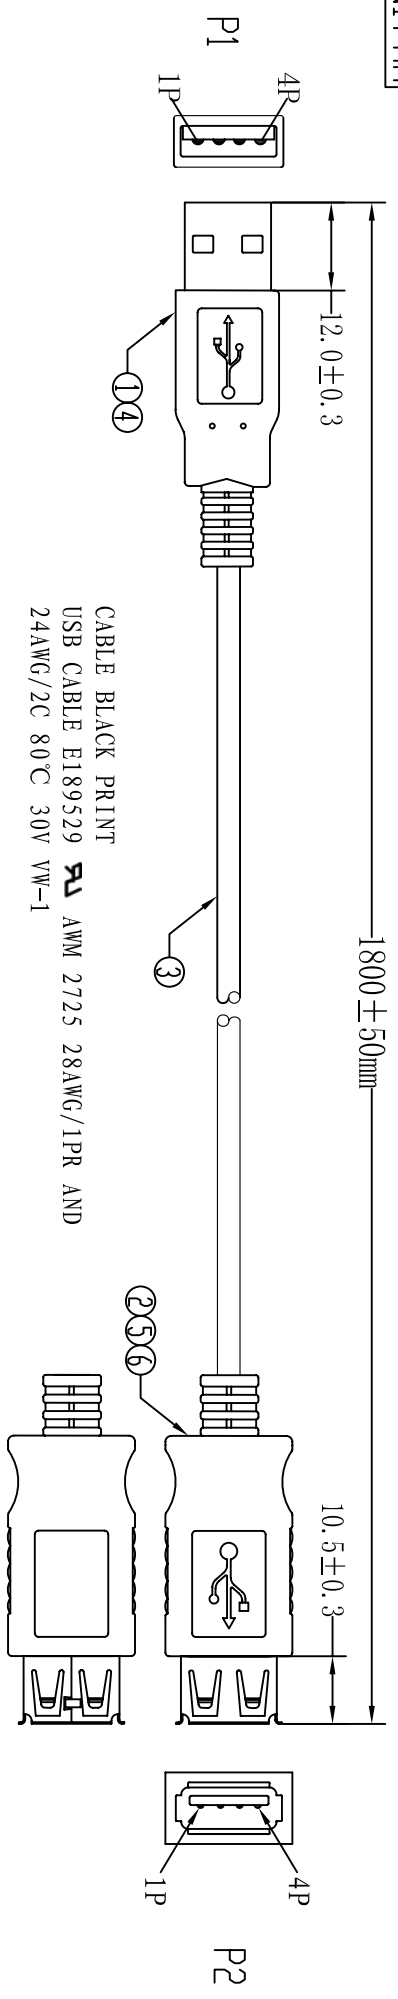


CABLE BLACK PRINT
 USB CABLE E189529 AWM 2725 28AWG/1PR AND
 24AWG/2C 80°C 30V VW-1

PIN ASSIGNMENT:

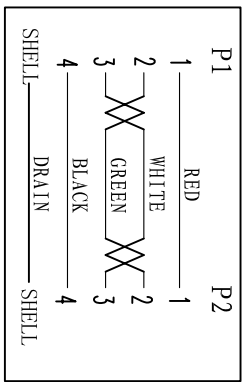

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 10MOhm(min)
 4. dielectric test: DC 300V

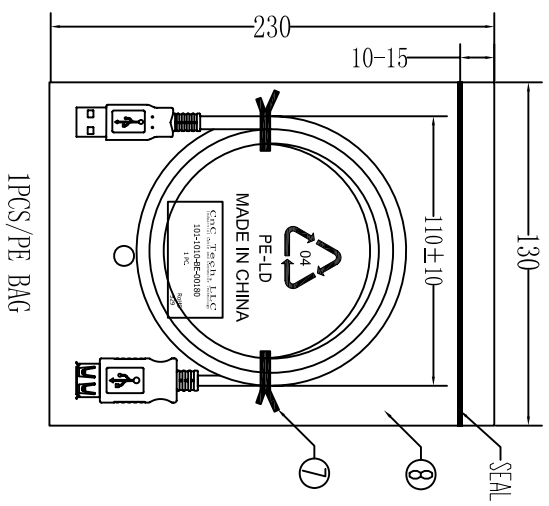

⑨	PE BAG	L/10	CLEAR SIZE: 280*330*40.05mm	PRINT BLACK "MADE IN CHINA" + "10PCS"
⑧	PE BAG	1	CLEAR SIZE: 130*230*40.05mm	PRINT BLACK "MADE IN CHINA"
⑦	TIE	2	WHITE L=100mm	
⑥	IN JACKET	3g	CLEAR LDPE (MOULD NO: NM-027)	
⑤	OUT JACKET	7g	BEIGE (IV-29#) PVC-40P (MOULD NO: NM-83)	
④	OUT JACKET	6g	BEIGE (IV-29#) PVC-40P (MOULD NO: NM-40)	
③	CABLE	1	BEIGE (IV-29#) USB1.1 UL2725 28#/1P+26#/2C+AEB OD: 4.7mm L=1780 ± 10mm	
②	CONN	1	USB A FEMALE SHELL: NICKEL PIN G/F SHORT TYPE INSULATOR COLOR: WHITE	
①	CONN	1set	USB A MALE SHELL: NICKEL PIN G/F 4PCS TYPE INSULATOR COLOR: WHITE	
NL	NAME	QTY	SPECIFICATION	

CNC Tech, LLC				
Industrial Cable and Connector Technology				
DRAWN	ZHONGHS	DRAWING NO		
CHECKED		CUSTOMER		
APPROVAL		ITEM NO.	101-1010-BE-00180	
DECIDED		DATE	2012-02-14	
VERSIONS/EDITION	A/0	PROJECTION		

4 3 2 1 4 3 2 1