

MODELS:

PDU3VN3G60, PDU3VN6G60B, PDU3VN10G60

3-Phase Monitored Rack-Mount PDU



200/208/240V
3-Phase Input



60A Blue IEC 309
3P+E Plug



200/208/240V
Single-Phase
Output



48 Total
Outlets



14.5kW
Load
Capacity



Multimode
Load Meter



0U
Rackmount









Toolless
Mounting
Buttons

- A** Digital Load Meter
- B** C13 and C19 Outlets
- C** 20A Circuit Breakers (x3, One per Outlet Load Bank)
- D** Plug-Lock Cable Retention Inserts
- E** Removable Mounting Brackets
- F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- G** PDU3VN3G60: 3-ft. Input Power Cord
PDU3VN6G60B: 6-ft. Input Power Cord
PDU3VN10G60: 10-ft. Input Power Cord
- H** 60A Blue IEC 309 3P+E Input Plug (IP44)
- I** Durable Metal Housing
- J** Network Interface
- K** RJ45 Ethernet Jack
- L** Manual Configuration Port
- M** Environmental Monitoring Port
- N** Network Interface Reset Button

Also Includes:
Owner's Manual

Multimode Load Meter: Display the load for any phase or bank, display temperature or humidity (requires optional EnviroSense sensor), display the IP address or rotate the display 180°.

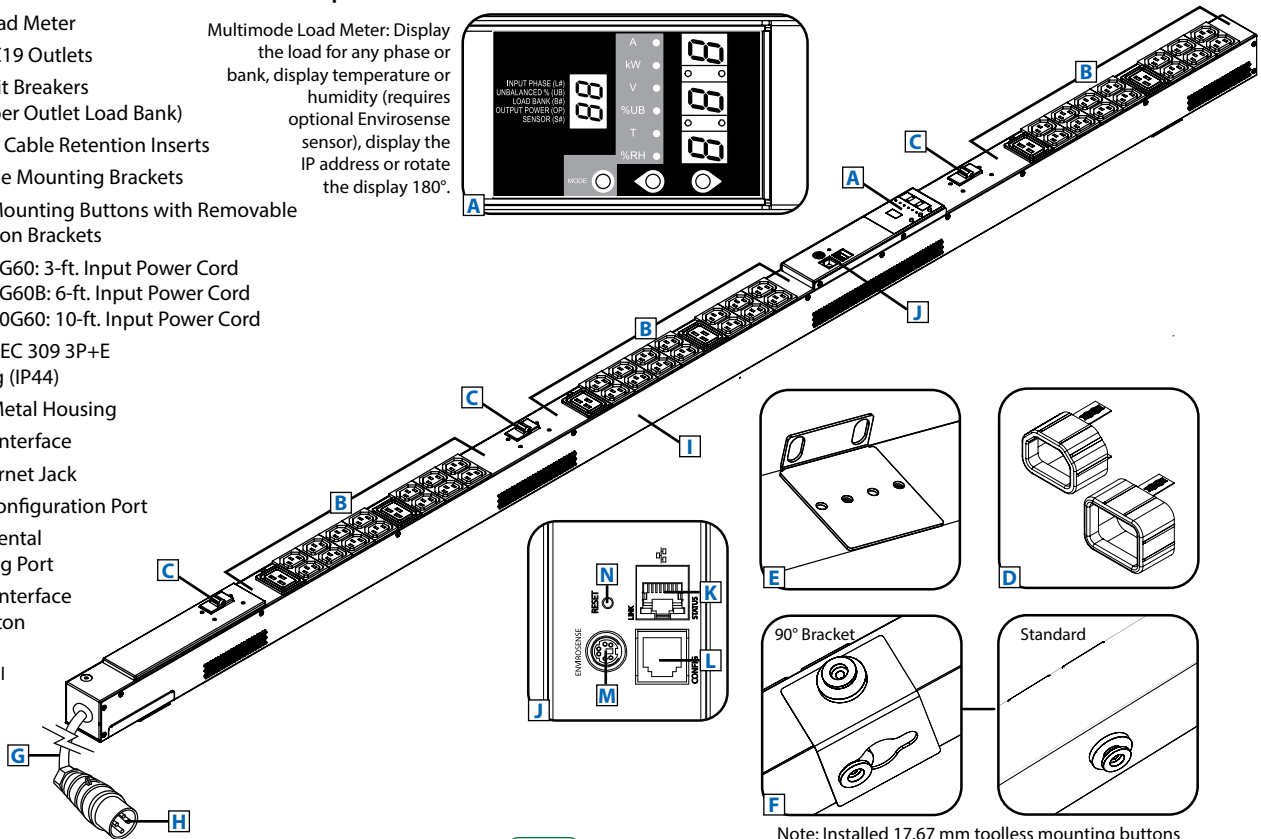

Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

Specifications

Models	PDU3VN3G60, PDU3VN6G60B, PDU3VN10G60
Voltage	200/208/240V (3-Phase Input/Single-Phase Output)
Frequency	50/60Hz
Load Capacity	12.1/12.6/14.5kW
Input Plug	60A Blue IEC 309 3P+E
Input Cord Length	PDU3VN3G60: 3 ft., PDU3VN6G60B: 6 ft., PDU3VN10G60: 10 ft.
Outlets	48 (42 C13 / 6 C19)
Primary Mounting Option	0U (Vertical) Rackmount
Shipping Weight	PDU3VN3G60: 23 lb. PDU3VN6G60B: 26 lb. PDU3VN10G60: 24 lb.
Unit Weight & Dimensions	PDU3VN3G60: 17 lb. / 70 x 2.17 x 2.59 in. PDU3VN6G60B: 18.7 lb. / 70 x 2.17 x 2.59 in. PDU3VN10G60: 17.1 lb. / 70 x 2.17 x 2.59 in. <i>See next page for detailed unit measurements.</i>
Standards	Tested to UL/CSA 60950-1 (US & Canada). NOM (Mexico), FCC Class A, RoHS, TAA Compliant








- Distributes power to 48 outlets (14 C13 and 2 C19 per phase)
- Remote monitoring and control via SNMP, Web or Telnet
- Displays load for any output phase in real time
- Perfect for rack-mount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

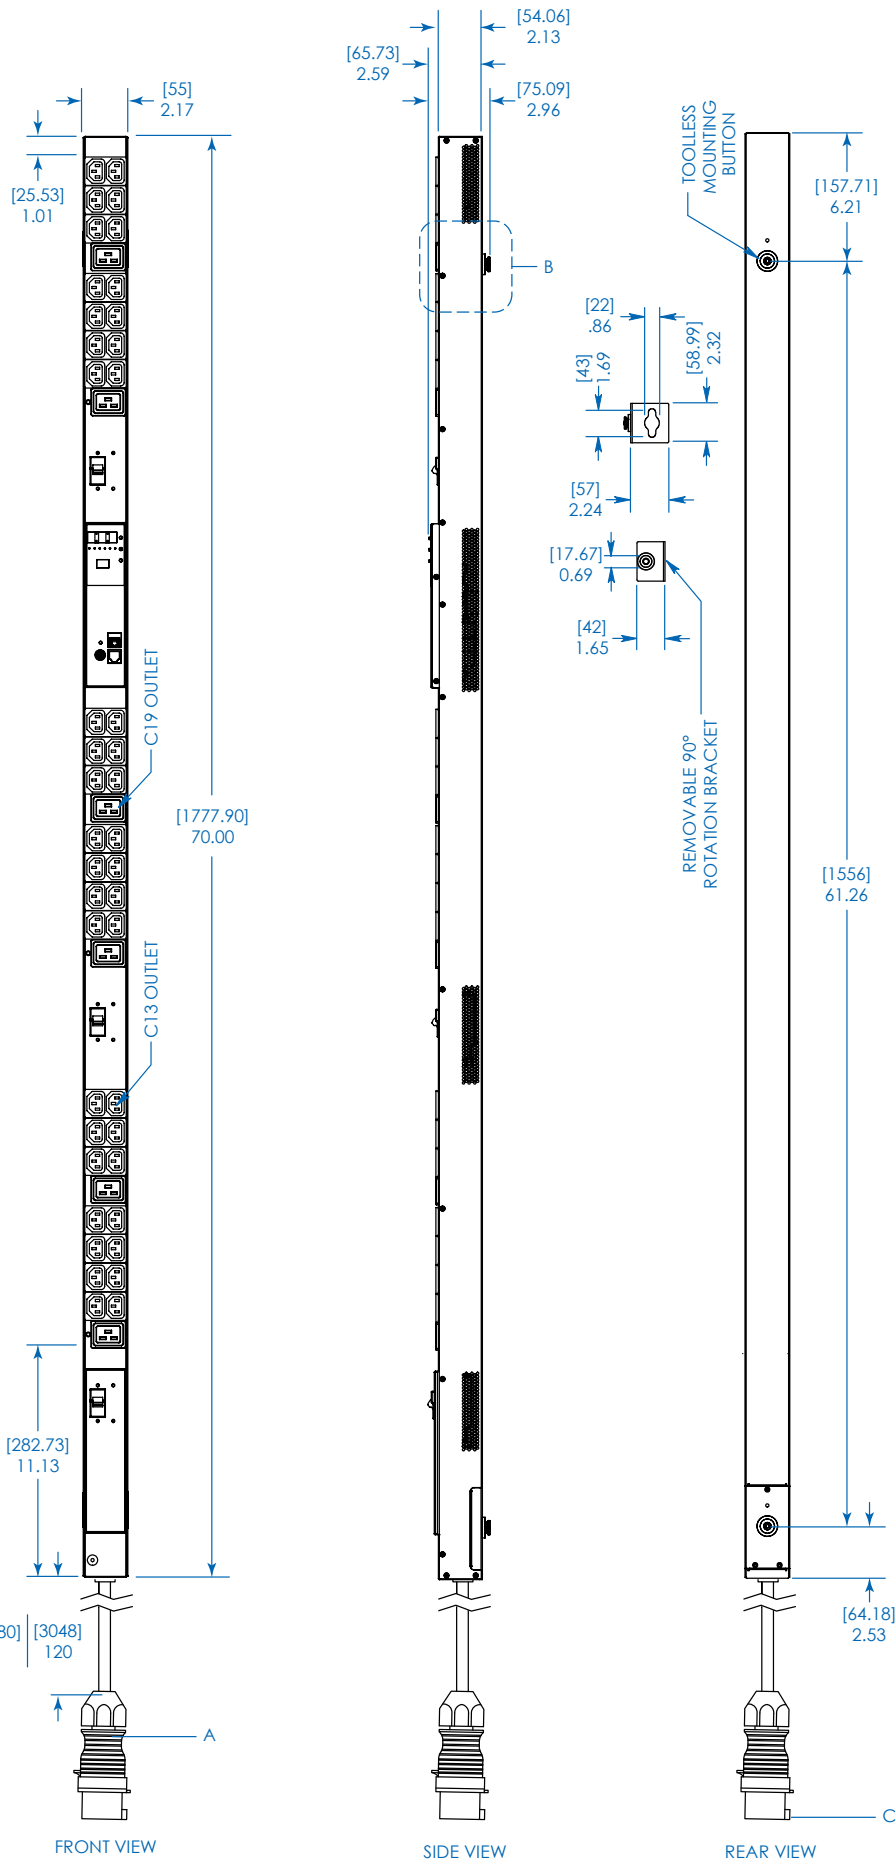

MODELS:
PDU3VN3G60,
PDU3VN6G60B,
PDU3VN10G60



1111 W. 35th Street
 Chicago, IL 60609 USA
 773.869.1234
 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.