


Solder PIN straight stamped contacts with through hole

Directive 2002/95/EC  
„RoHS“  
Compliant

( click on the schematic(s) for a more detailed view )

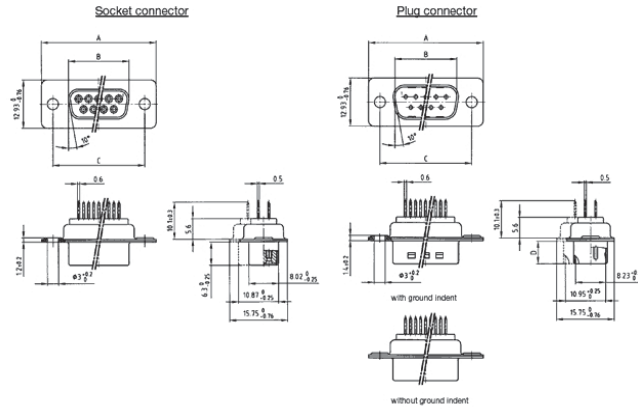

Socket connector:

No. of pos.	A -0,76	B-0,25	C
9	31,19	16,46	25,00 <sup>+0,12 -0,13</sup>
15	39,52	24,79	33,30 <sup>+0,15 -0,16</sup>
25	53,42	38,50	47,04 <sup>+0,13</sup>
37	69,70	54,96	63,50 <sup>+0,13</sup>
50	67,31	52,55	61,10 <sup>+0,14 -0,11</sup>

Plug connector:

No. of pos.	A -0,76	B+0,25	C	D -0,30
9	31,19	16,79	25,00 <sup>+0,12 -0,13</sup>	6,12
15	39,52	25,12	33,30 <sup>+0,15 -0,16</sup>	6,12
25	53,42	38,84	47,04 <sup>+0,13</sup>	5,99
37	69,70	55,30	63,50 <sup>+0,13</sup>	5,99
50	67,31	52,68	61,10 <sup>+0,14 -0,11</sup>	5,99

Part Numbers

No. of Pos.	Socket connector	
	yellow zinc	tin-plated
9	162 A 12869 X	164 A 12869 X
15	162 A 12879 X	164 A 12879 X
25	162 A 12889 X	164 A 12889 X
37	162 A 12899 X	164 A 12899 X
50	162 A 12909 X	164 A 12909 X

No. of Pos.	Plug connector	
	yellow zinc	tin-plated with ground indent
9	161 A 14219 X	163 A 14219 X
15	161 A 14229 X	163 A 14229 X
25	161 A 14239 X	163 A 14239 X
37	161 A 14249 X	163 A 14249 X
50	161 A 14259 X	163 A 14259 X



REG.-Nr. 40000440



File #: E202784



File #: LR115000