

SPRING-LOADED CONNECTORS

SERIES 419, 499 • 2,54 GRID CONCAVE FACE TARGET CONNECTORS FOR SPRING-LOADED ASSEMBLIES • DOUBLE ROW STRIPS



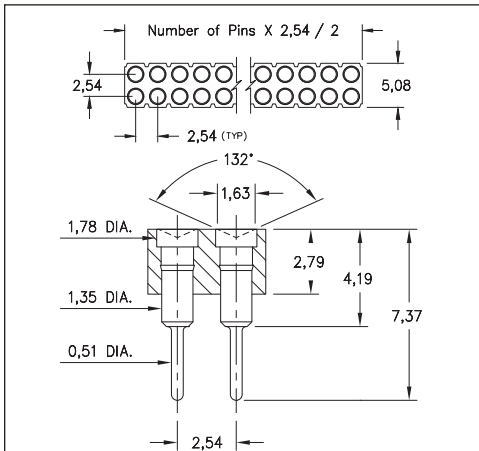


FIG. 1

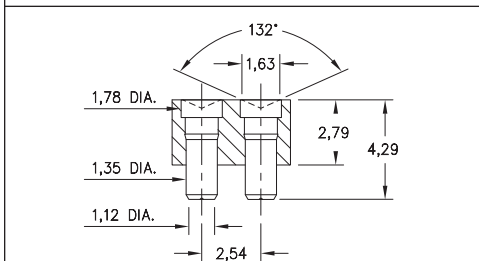

Coplanarity 0,13. For Pin counts >20 positions, consult Technical Support.

FIG. 2

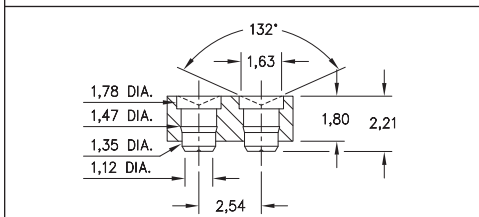

Coplanarity 0,13. For Pin counts >20 positions, consult Technical Support.

FIG. 3


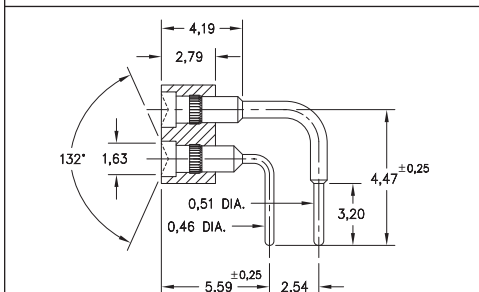


FIG. 4

- Series 419 and 499 Spring Target Connectors, supplied in double row strips. Available in SMT and right angle through-hole termination configurations
- Target Connectors provide an excellent gold-plated conductive mating surface for spring loaded connectors. These series are offered with a concave face for making contact with our standard 1,07 dia. spring pin plungers
- Target connectors use MM #1948, #1955, #1957 and #1958/1960 pins. See pages 223.1, 223.2 and 223.3 for details
- Insulators are high temperature thermoplastic

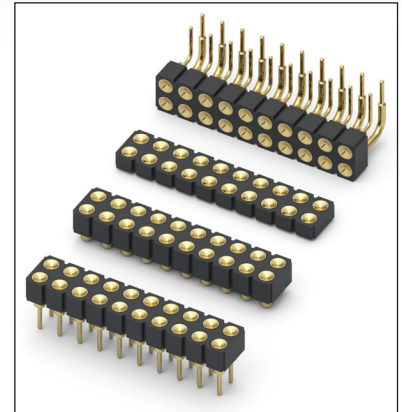

ORDERING INFORMATION

	Series 419...006	Standard Solder Tails
FIG. 1	419-10-2	-00-006000
	Specify number of pins	04-64
FIG. 2	419-10-2	-30-007000
	Specify number of pins	04-72
FIG. 3	419-10-2	-30-055000
	Specify number of pins	04-72
FIG. 4	499-10-2	-10-007000
	Specify number of pins	02-64



XX=Plating Code
See Below

For
Electrical, Mechanical
& Environmental Data,
See page 264

SPECIFY PLATING CODE XX=	10		
Pin Plating	 0,25µm Au		

