

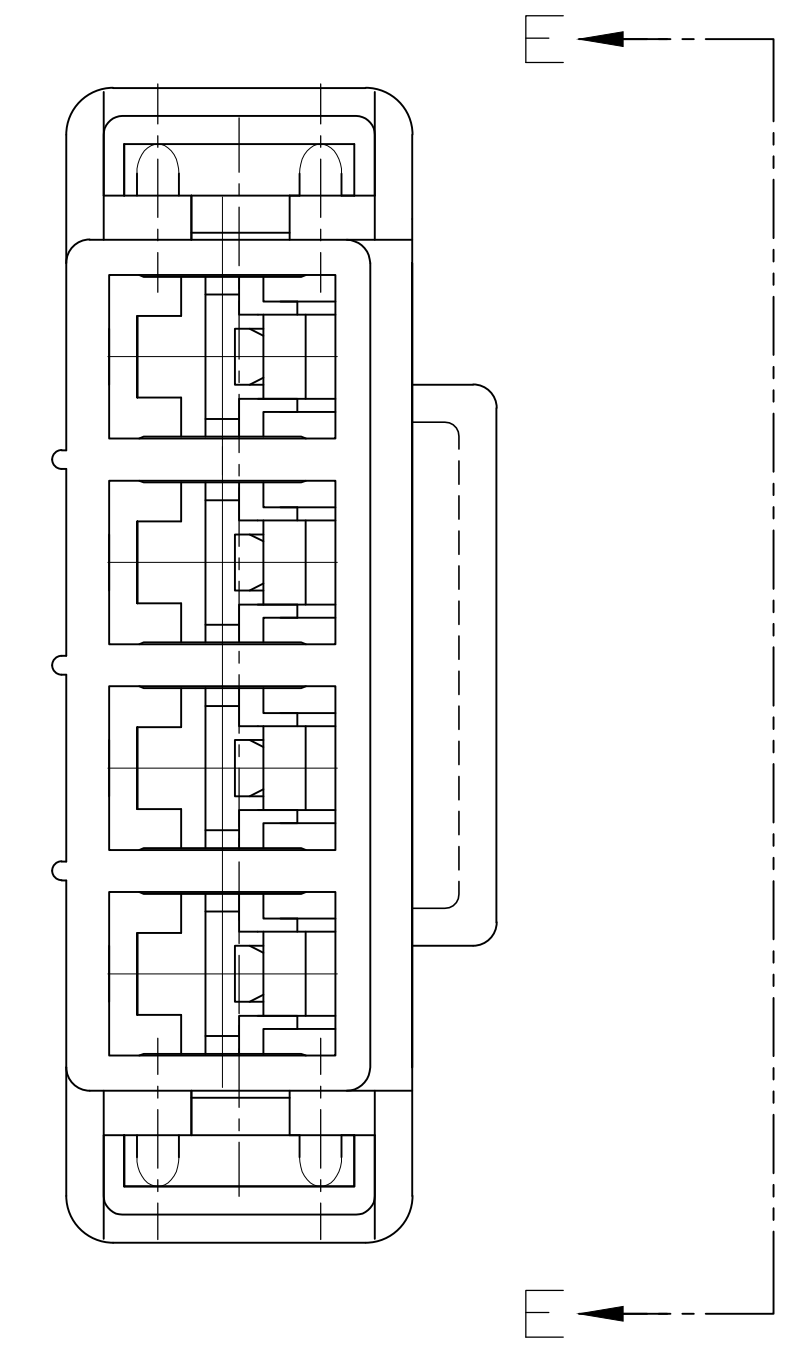
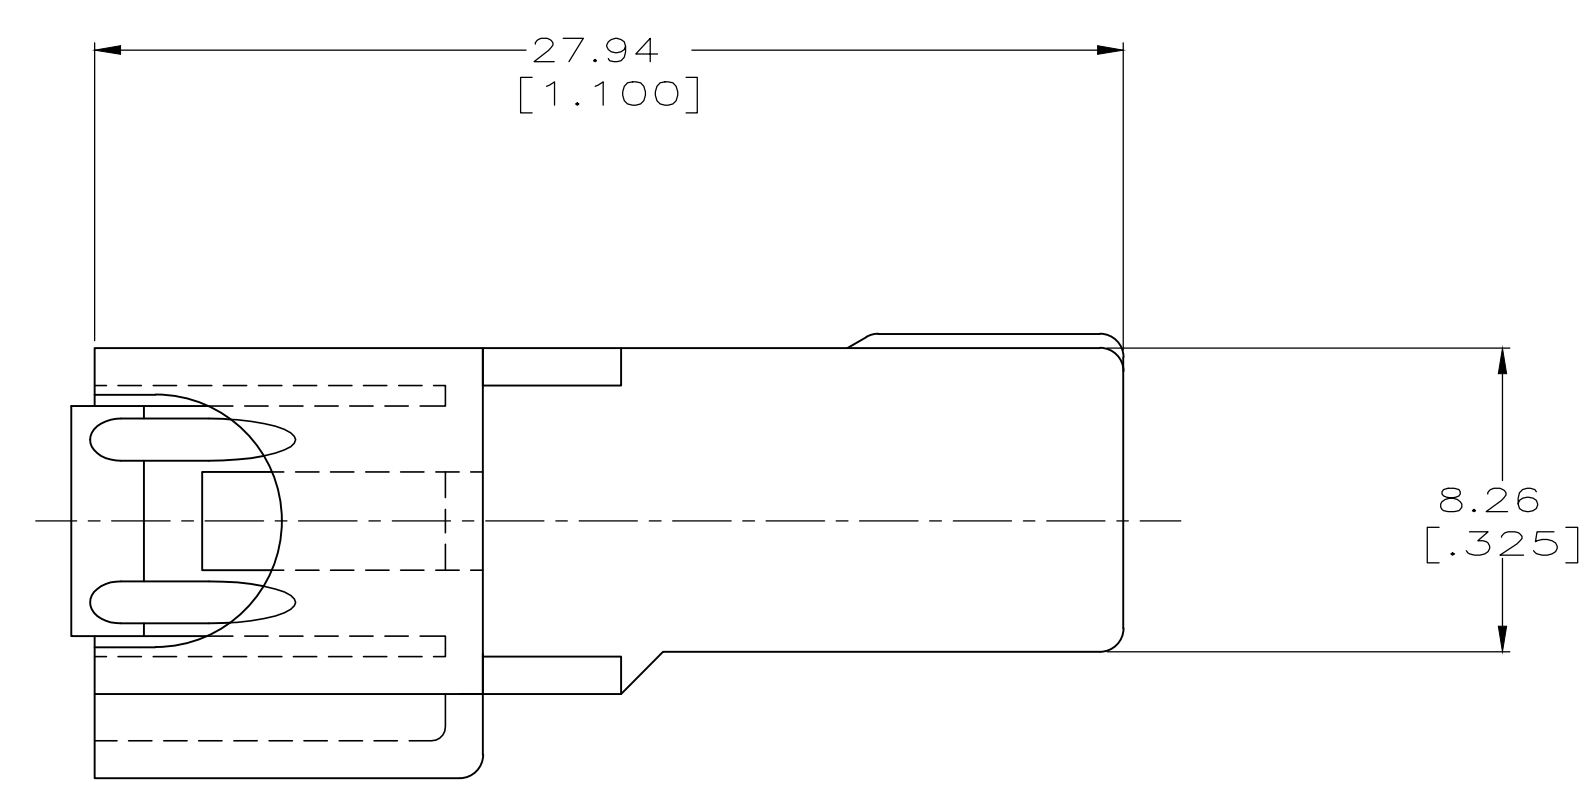
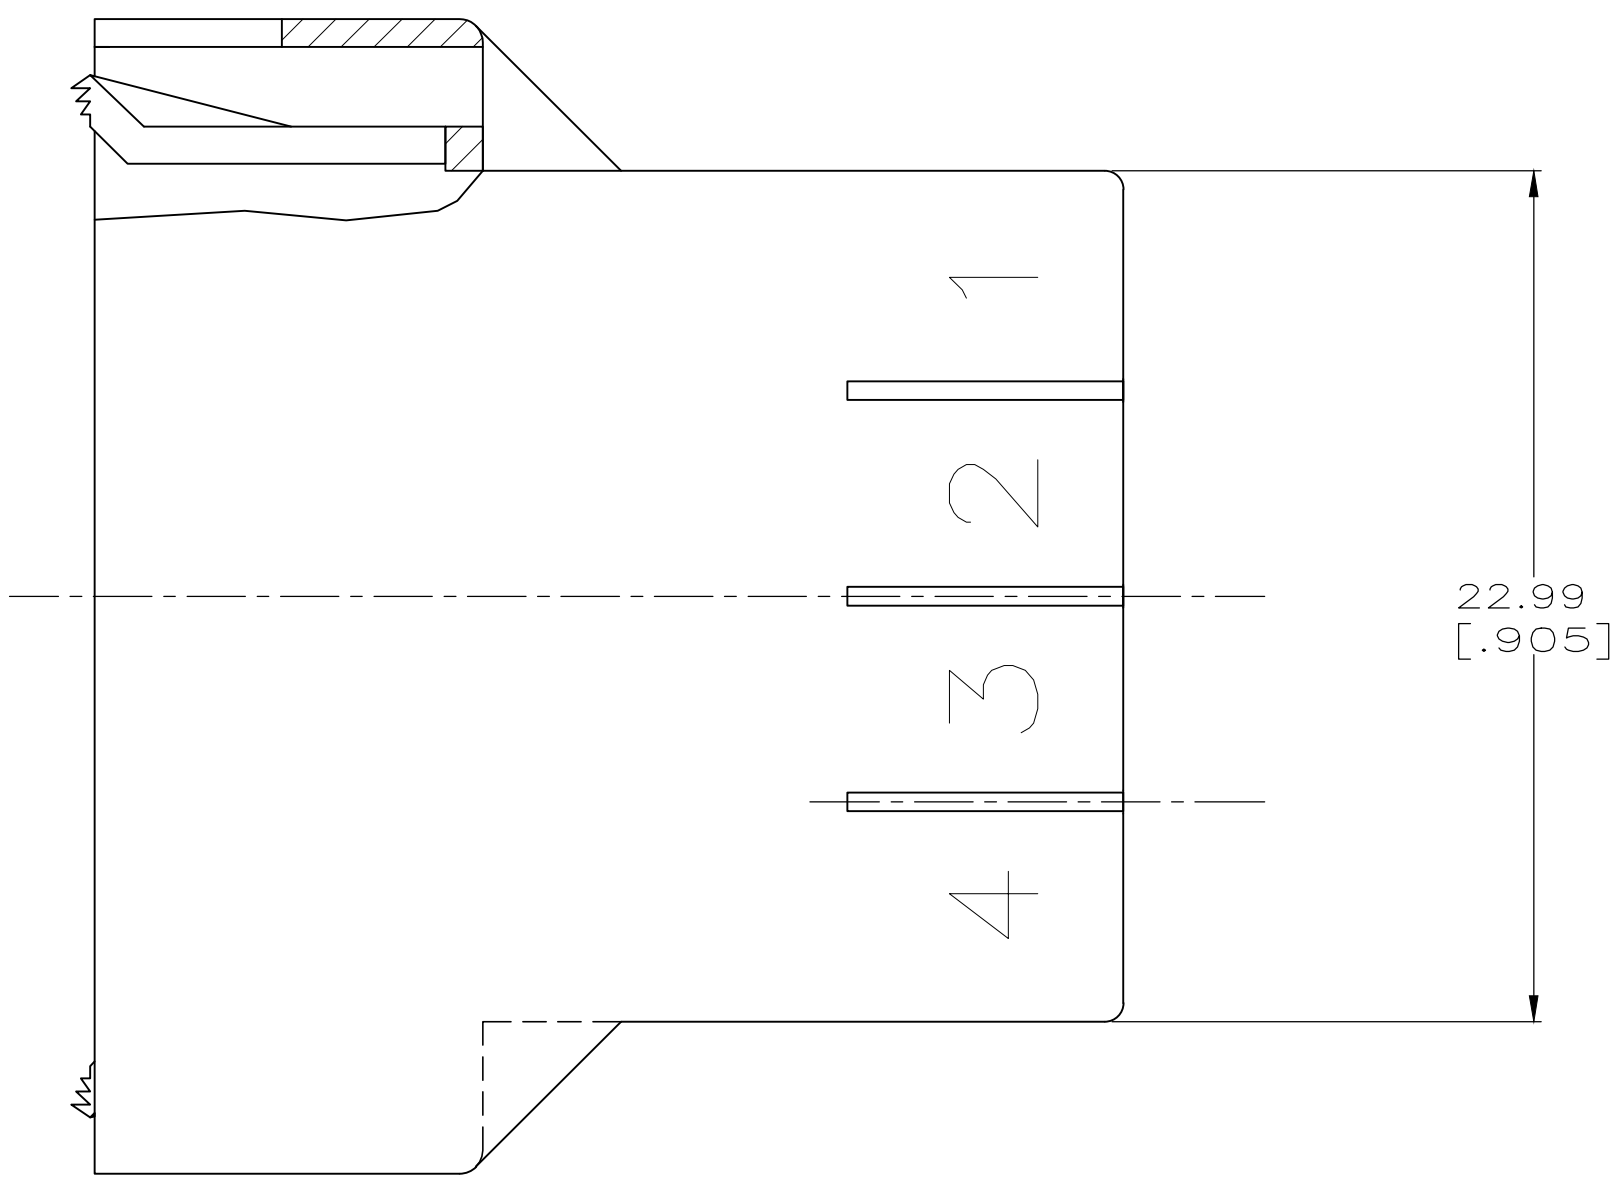
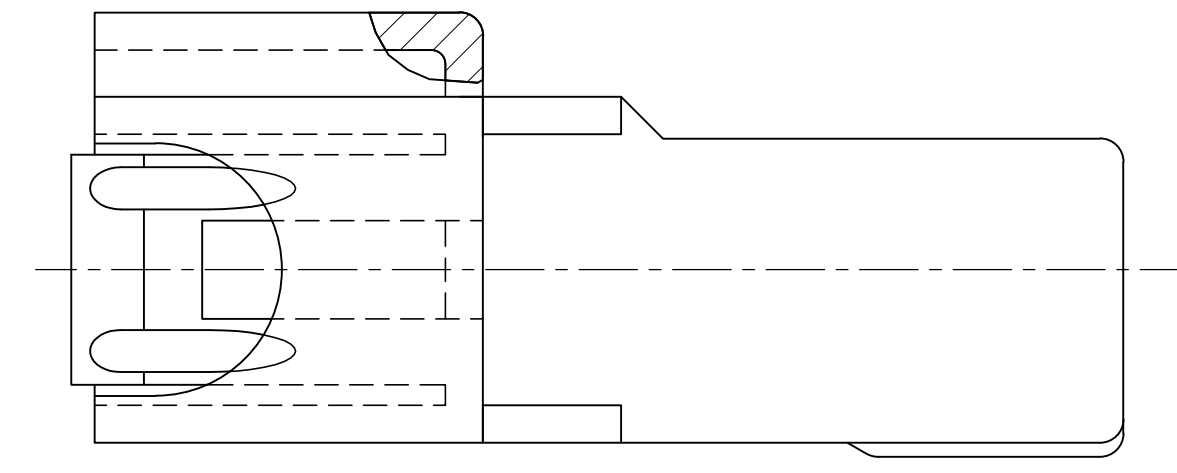


LOC		DIST		REVISIONS			
P	F	ZONE	LTR	DESCRIPTION	DATE	APPD	
AF	50		C	ADD -2 PER 0710-0088-95	26/FEB/94	PF/JF	
			C1	REVISED PER ECO-09-024606	07/NOV/99	AEG	
			D	REVISED PER ECR-18-008168	06/JUL/18	MD/TD	

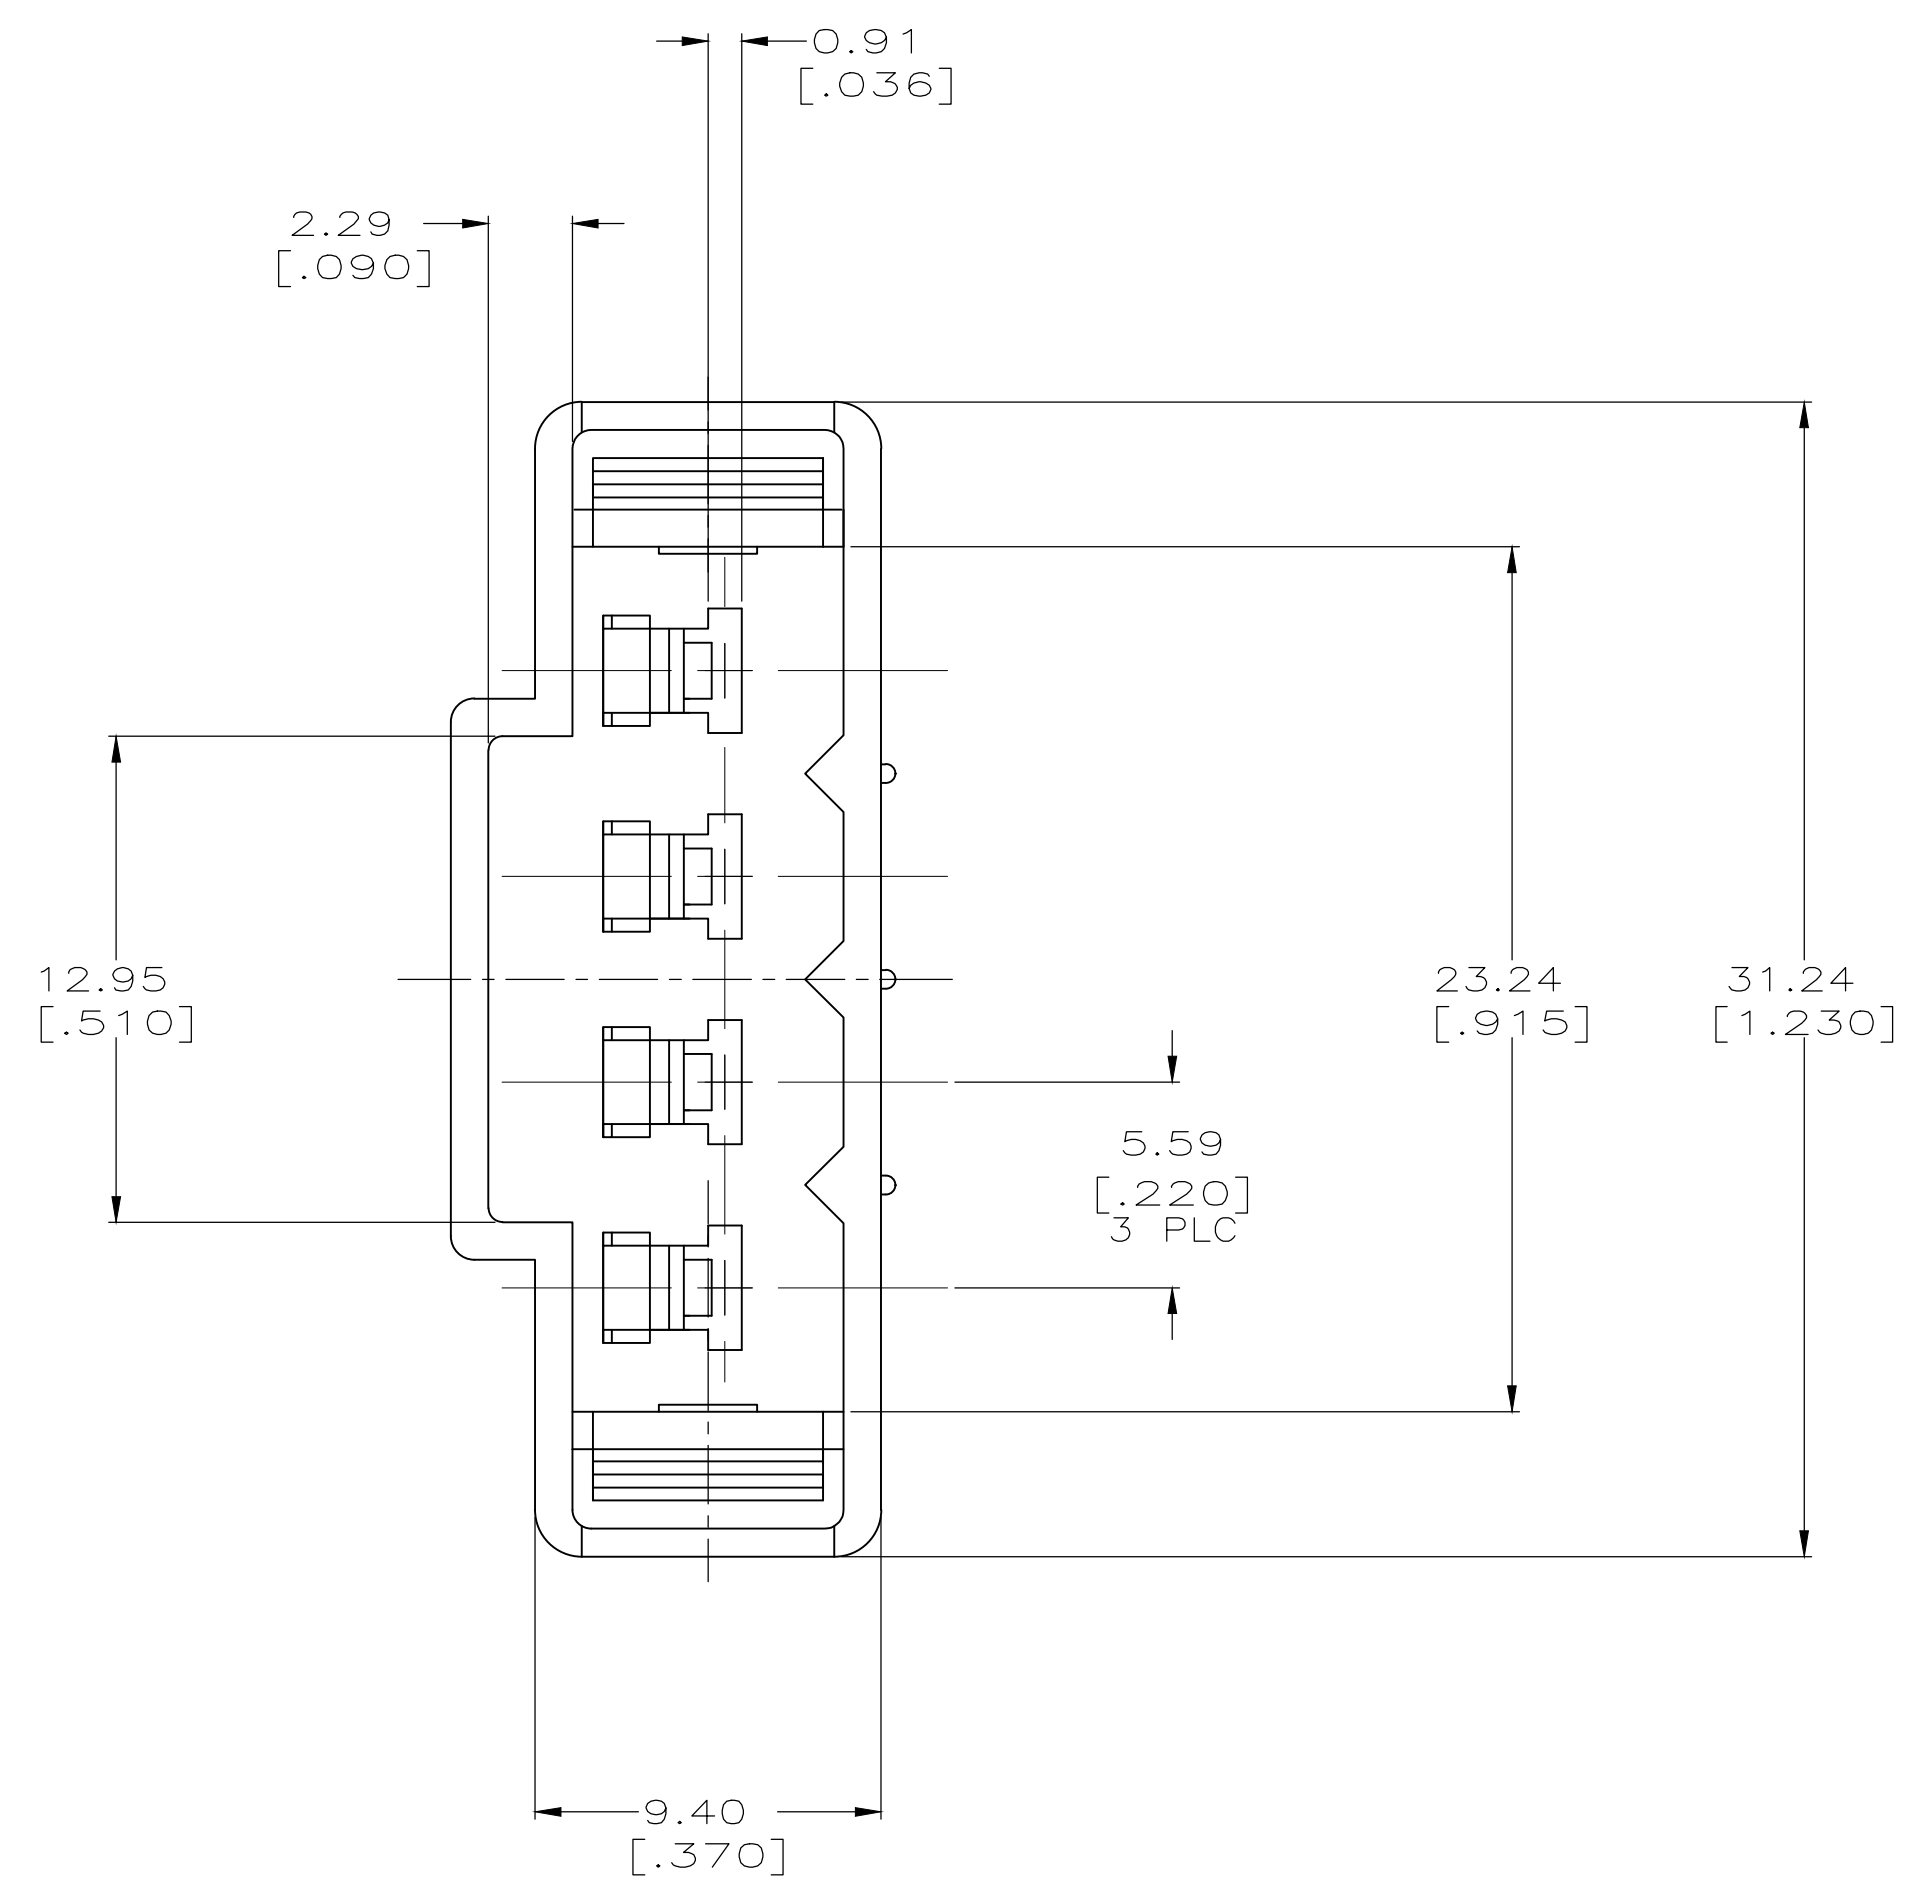

- 1 PART ACCEPTS BLADE CONTACT PART NO 63627-1.
- 2 PART MATES WITH PLUG PART NO 520991-1 & 521047-1.
- 3 THIS MATERIAL HAS A 130 C ELECTRICAL TEMPERATURE INDEX RATING BY U.L. AND 94 V-2 FLAMMABILITY RATING.
- 4 THIS MATERIAL HAS A 125 C ELECTRICAL TEMPERATURE INDEX RATING BY U.L. AND 94 V-2 FLAMMABILITY RATING.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

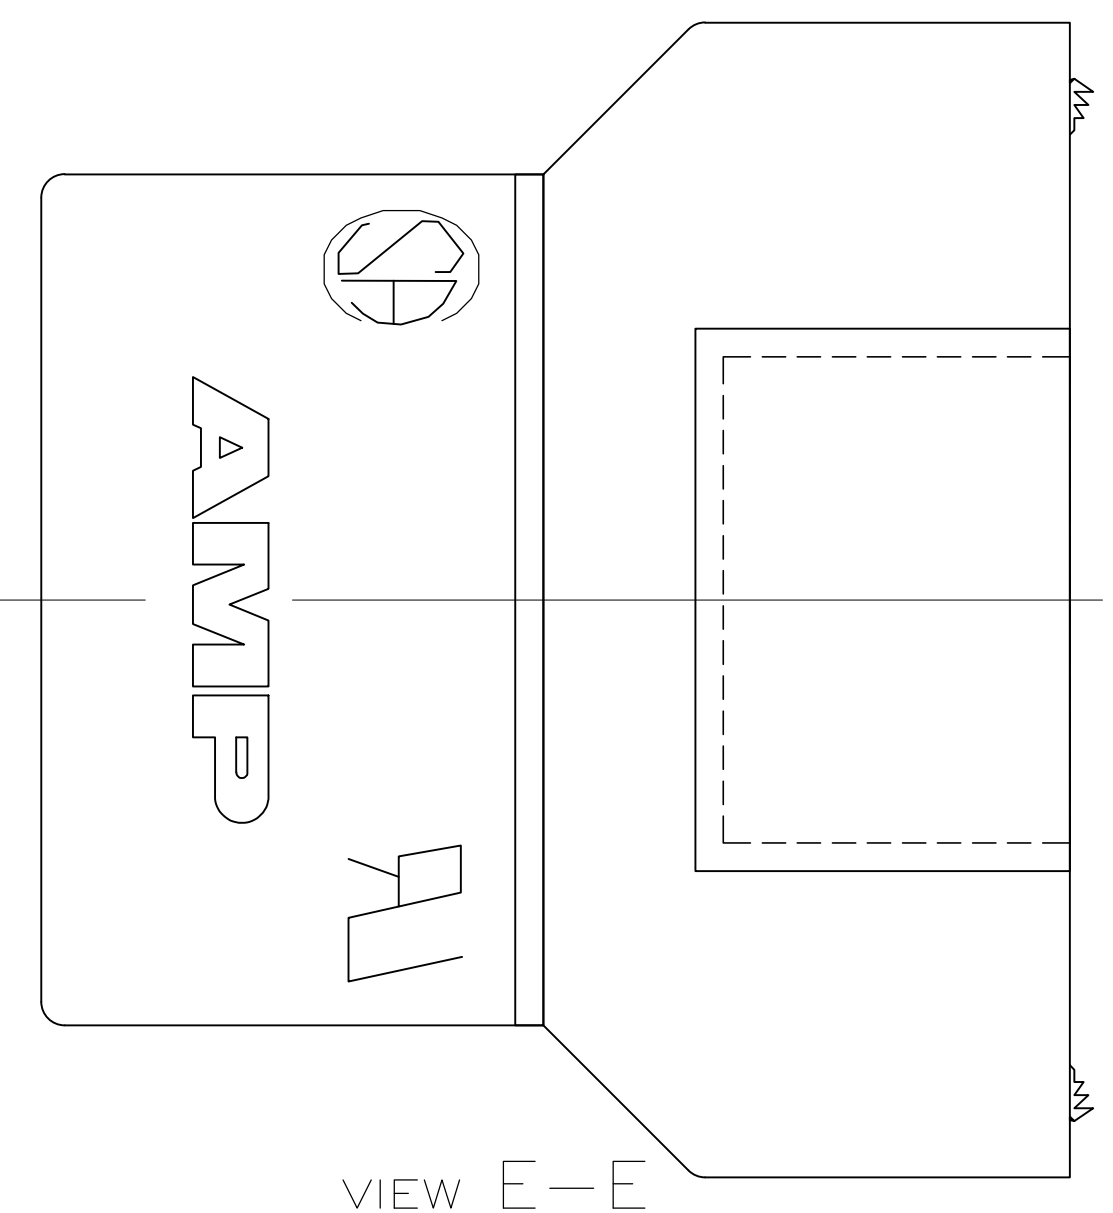

OBSOLETE

5	OBSOLETE	NATURAL	NYLON 6/6/4	521048-2
	OBSOLETE	BLACK	PBT	521048-1
		COLOR	MATERIAL	PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.25 [.010] 3 PLC DEC ± - ANGLES ± -		DR 11/8/93 P FORTNEY	AMP Incorporated Harrisburg, PA 17105-3608	
MATERIAL		CHK 11/8/93 JR RUTH		
SEE TABLE	APPD 11/8/93 D DECKER	NAME CAP, 4 CIRCUIT, 3.18 [.125] BLADE		
FINISH	APPD 11/8/93 R KUZD	PRODUCT SPEC	SIZE	CAGE CODE
SEE TABLE	APPLICATION SPEC	WEIGHT	D	00779
			SCALE	DRAWING NO
			5:1	C-521048
				SHEET 10F 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.