


Extended length is with 500g of force

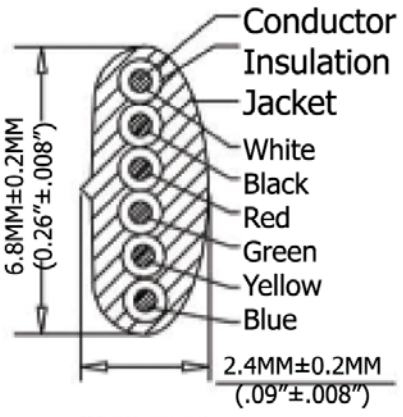

P1	COLOR
1	WHITE
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	BLUE

**Material:**

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

Extended Length ("L2")	Typical Retracted Length ("L1")
60.0 Inches - 69.0 Inches	21.5 Inches
1,524.0MM-1,752.6MM	546.1MM

**SEC: A-A**



Scale	1:1					Name	Item No.
TOLERANCE					Drawn	11.02.11	<b>AT-C-26-6/6/B-5-OE</b>
X.X	±0.40				Approved		
X.XX	±0.25						<b>Title</b> NON-UL 26 AWG (0.12X12)*6C, O.D.: 2.4*6.8MM, Reverse Plug, 50µ" of contact plating, BLACK
X.XXX	±0.15						Drawing No.
Angle	±3°						<b>rev00</b>
							Replace
							Sheet
		Modification	Date	Name			

