

5



4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

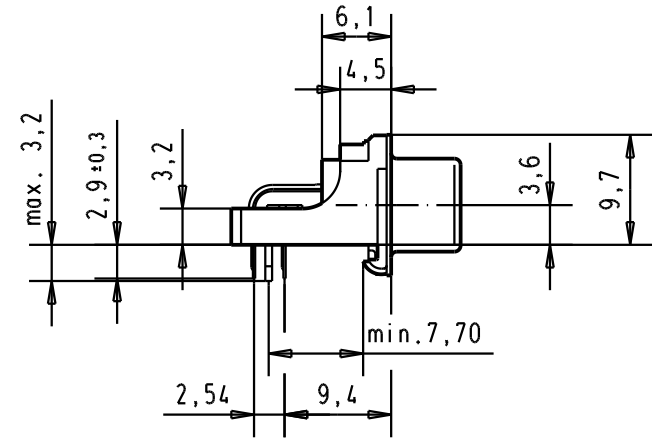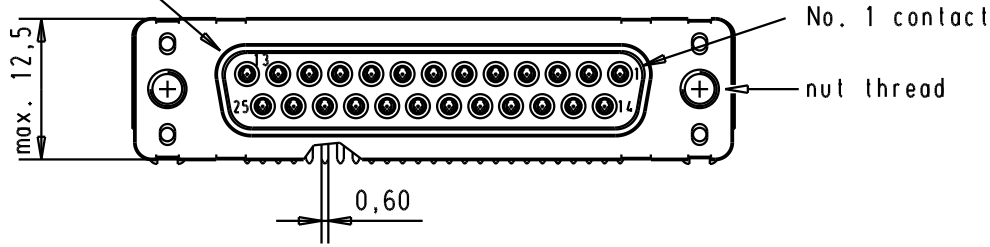

Printed board layout component side

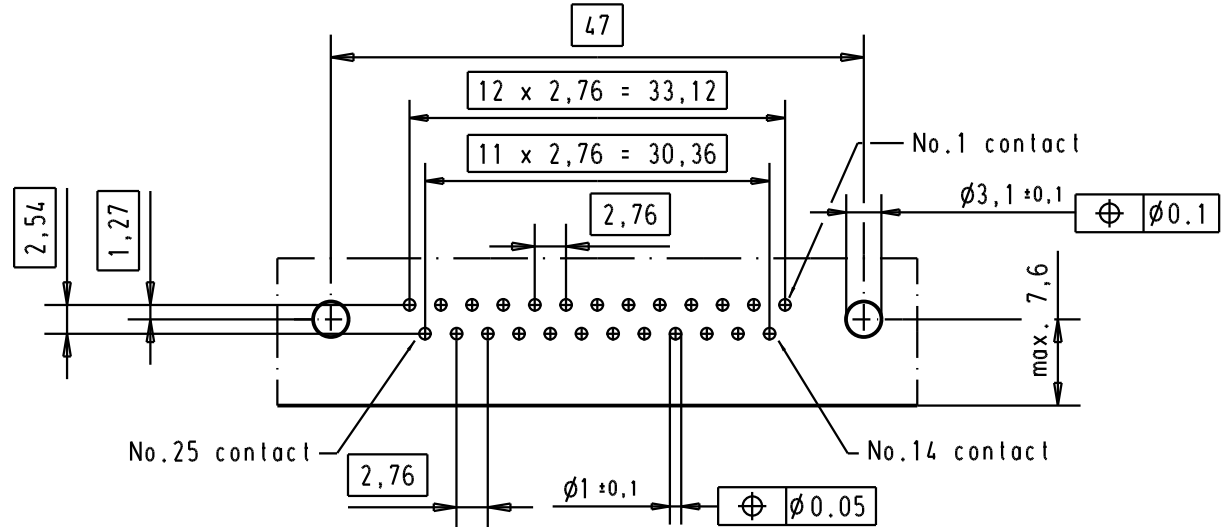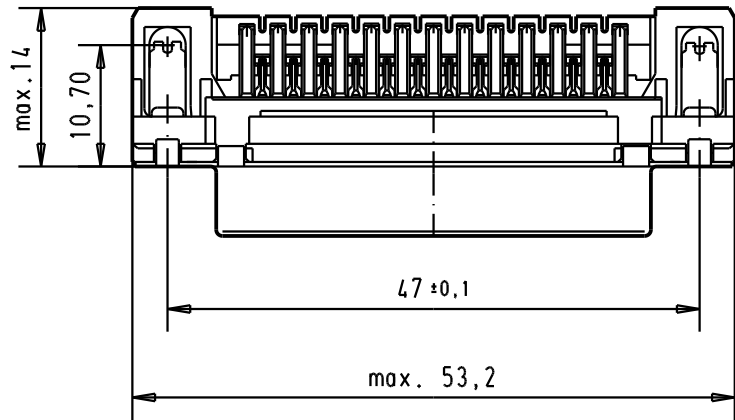

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

09 66 356 3615	M 3	1								<p>All Dim. in mm Orig. Size DIN A 4</p>	D-Sub, high temperature, female, low profil, 25 poles with solder pins 2.9, nuts and grounding board lock.	Maßstab/ Scale 1.5:1		
09 66 356 6615	M 3	2							Detail.				05/03/02	CV
09 66 356 7615	M 3	3							Insp.					
09 66 356 3616	4-40 UNC	1	31892	05/05/04	JH				Stand.					
09 66 356 6616	4-40 UNC	2	31084	04/09/02	YT				HARTING EURL F-95972 Paris			TB 0966356x61x	Blatt/ Page 4	
09 66 356 7616	4-40 UNC	3	29723	05/03/02	CV									
Part number	Screw lock thread	Performance level	Mod.	Dat.	Name							Sub.		