




P.C. MOUNTING

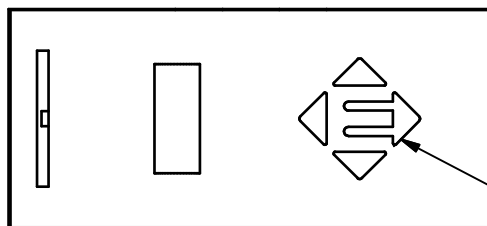

E-SWITCH LOGO LOCATION





ISOMETRIC SCALE: 3:1



CIRCUIT: SPDT

O.P. (MM)	P.T. (MM)
7.0 ±0.2	.35 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

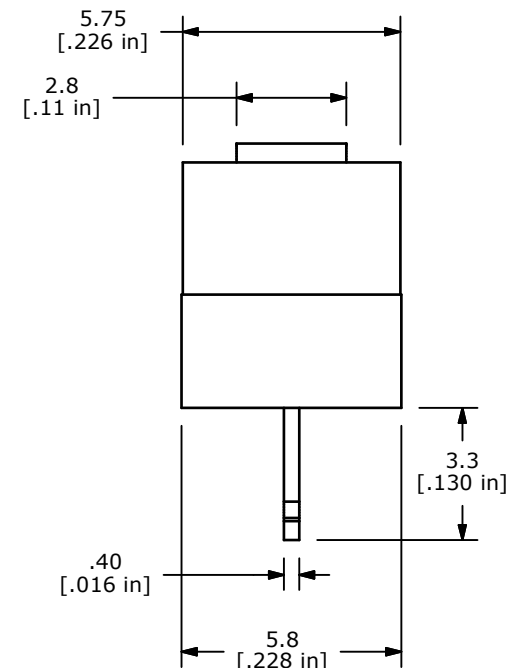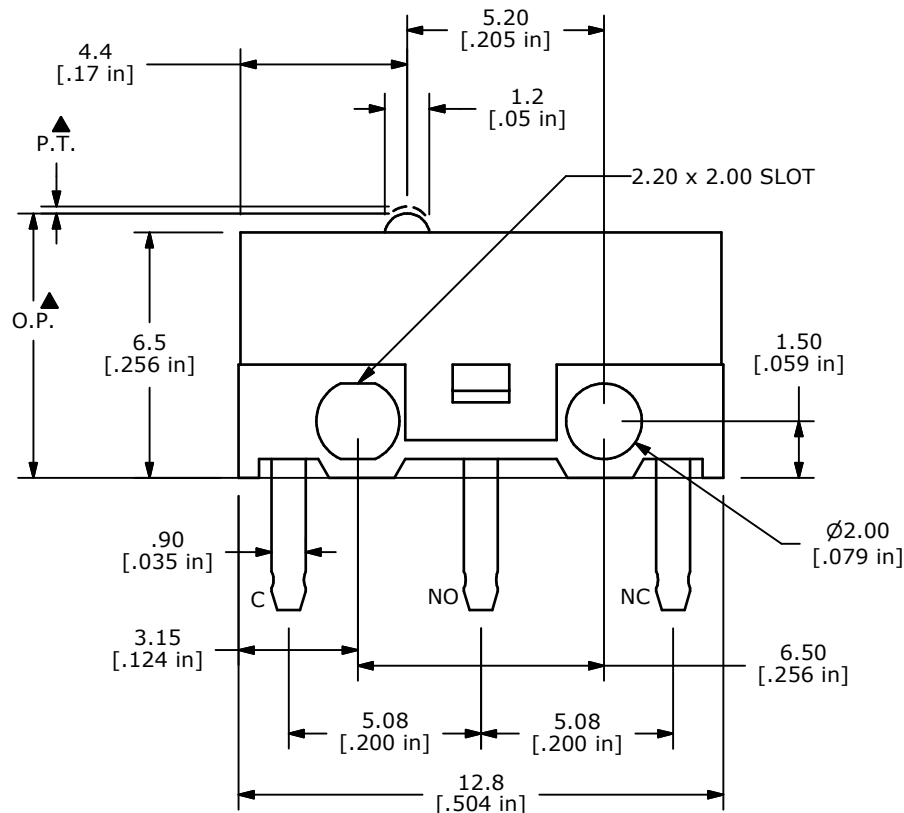

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- RATING: 3A @ 125 VAC UL
1.5A @ 250 VAC UL
- OPERATING FORCE: 130 ± 40 GRAMS
- OPERATING TEMP: -25°C TO 75°C
- ELECTRICAL LIFE: 10,000 CYCLES MIN.
- MECHANICAL LIFE: 1,000,000 CYCLES MIN.
- INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
- DIELECTRIC STRENGTH: 500VAC - 1 MINUTE
- ▲ DENOTES CRITICAL PARAMETER.
- PACKAGED IN TRAYS, 120 PIECES PER TRAY.
- 2002/95/EC (ROHS) COMPLIANT



TITLE SS0750300F130P1A

A	18179	RELEASE FOR PRODUCTION	7/14/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
4:1	7/14/2008	BLR	Q971019	A