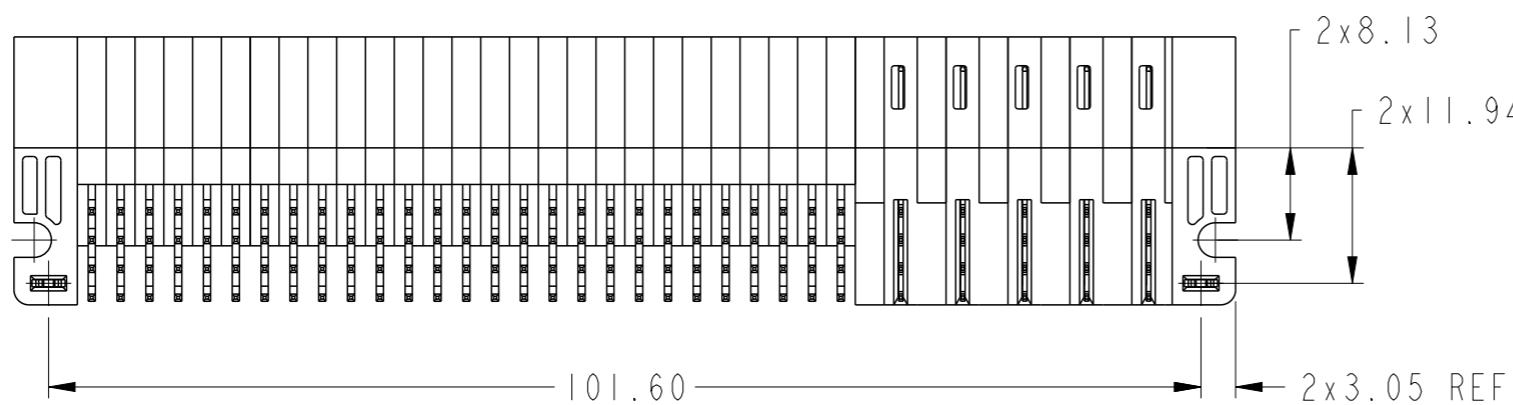
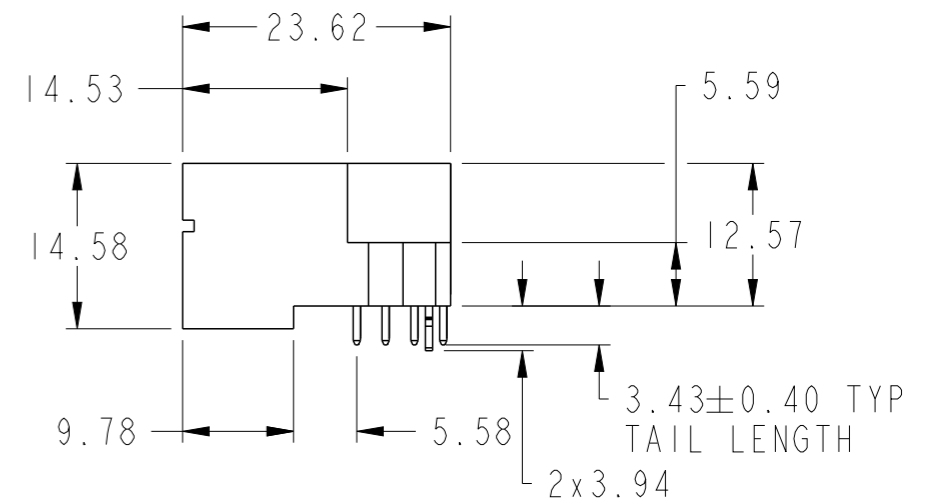
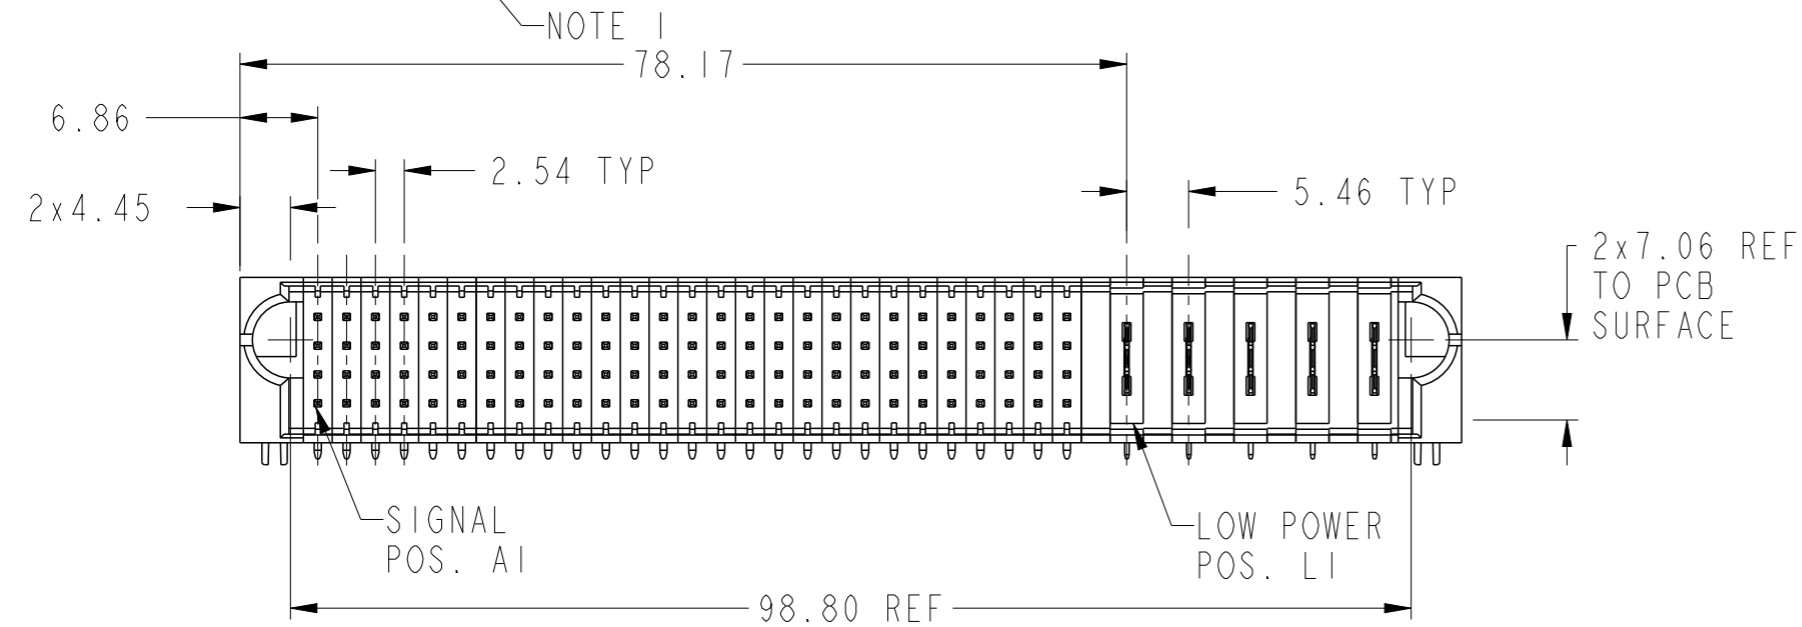
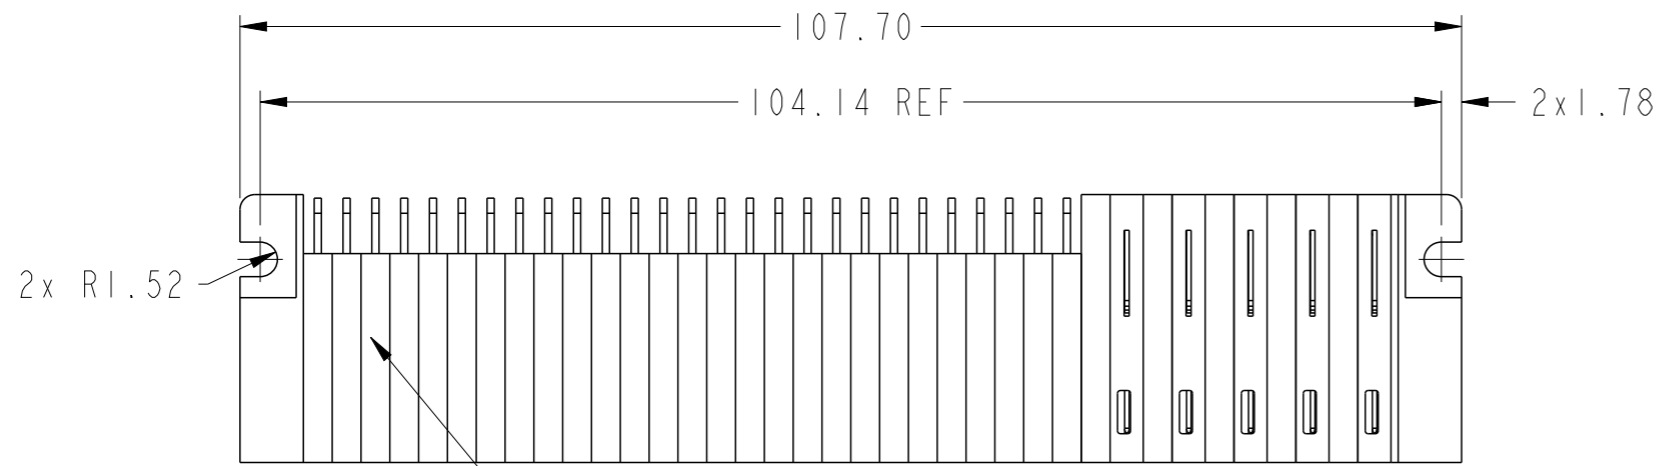


PRODUCT NUMBER SEE SHEET 2



|                                       |   |             |              |                        |              |      |                |           |           |          |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |
|---------------------------------------|---|-------------|--------------|------------------------|--------------|------|----------------|-----------|-----------|----------|---------|----|-----|------|----------------|------------|--|---|---------|------------|---------------|--|---|--------|------------------|-----|---|
| spec ref                              | *   | dr          | Rainbow Zhan | 2014/07/04             | projection   | MM   | size           | A3        | scale     | 3:2      |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |
| tolerance std                         | ASME Y14.5  | eng         | Rainbow Zhan | 2014/07/15             |              |      | ecn no         | -         | rel level | Released |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |
| TOLERANCES UNLESS OTHERWISE SPECIFIED |   | chr         | Li-He        | 2014/07/14             |              |      | product family | PwrBlade+ | rel level | Released |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |
| surface                               | <table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.5</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.25</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.10</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table> | linear      | 0.X          | ±0.5                   |              | 0.XX | ±0.25          |           | 0.XXX     | ±0.10    | angular | 0° | ±2° | appr | Pei-Ming Zheng | 2014/07/15 |  | <table border="1"> <tr> <td>part no</td> <td>108S + 5LP</td> </tr> <tr> <td>RA STB HEADER</td> <td></td> </tr> </table> | part no | 108S + 5LP | RA STB HEADER |  | <table border="1"> <tr> <td>dwg no</td> <td>10106262-0527101</td> </tr> <tr> <td>rev</td> <td>A</td> </tr> </table> | dwg no | 10106262-0527101 | rev | A |
| linear                                | 0.X   | ±0.5        |              |                        |              |      |                |           |           |          |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |
|                                       | 0.XX  | ±0.25       |              |                        |              |      |                |           |           |          |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |
|                                       | 0.XXX   | ±0.10       |              |                        |              |      |                |           |           |          |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |
| angular                               | 0°  | ±2°         |              |                        |              |      |                |           |           |          |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |
| part no                               | 108S + 5LP  |             |              |                        |              |      |                |           |           |          |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |
| RA STB HEADER                         |   |             |              |                        |              |      |                |           |           |          |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |
| dwg no                                | 10106262-0527101  |             |              |                        |              |      |                |           |           |          |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |
| rev                                   | A   |             |              |                        |              |      |                |           |           |          |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |
| ASME Y14.5                            |   | www.fci.com | cat. no.     | Product - Customer Drw | sheet 1 of 3 |      |                |           |           |          |         |    |     |      |                |            |  |   |         |            |               |  |   |        |                  |     |   |



1

2

3

4

A

B

C

D

A

B

C




D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10124315.
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.  
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.  
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.



Copyright FCI.

|   |                |                                      |   |   |              |          |       |     |
|---|----------------|--------------------------------------|---|---|--------------|----------|-------|-----|
| dr  | Rainbow Zhan   | 2014/07/04                           | projection<br> | MM<br> | size         | A3       | scale | 3:2 |
| eng   | Rainbow Zhan   | 2014/07/15                           |   |   | ecn no       | -        |       |     |
| chr   | Li-He          | 2014/07/14                           |   |   | rel level    | Released |       |     |
| appr  | Pei-Ming Zheng | 2014/07/15                           | product family  | PwrBlade+   |              |          |       |     |
|  |                | title<br>108S + 5LP<br>RA STB HEADER |   | dwg no<br>10106262-0527101  | rev<br>A     |          |       |     |
| www.fci.com   |                | cat. no.                             | Product - Customer Drw  |   | sheet 3 of 3 |          |       |     |

2

3