

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
GP	00	H		REVISED PER ECO-08-007327	27JAN2009	ZMR	WLM


1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.

② MATERIAL:
 HOUSING - THERMOPLASTIC (BLACK)
 TERMINALS - BERYLLIUM COPPER PLATED WITH EITHER .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL .000030 MIN TOTAL, ON CONTACT MATING SURFACE. .000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.

3. WIRE SIZE: 22 AWG SOLID OR 22 AWG 7 STRANDS OF COPPER CONDUCTORS. MAX INSULATION DIAMETER OF .045 IS ACCEPTABLE FOR MOST APPLICATIONS.

4. CENTER-TO-CENTER SPACING OF TERMINALS IS .085 REF.

⑤ CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

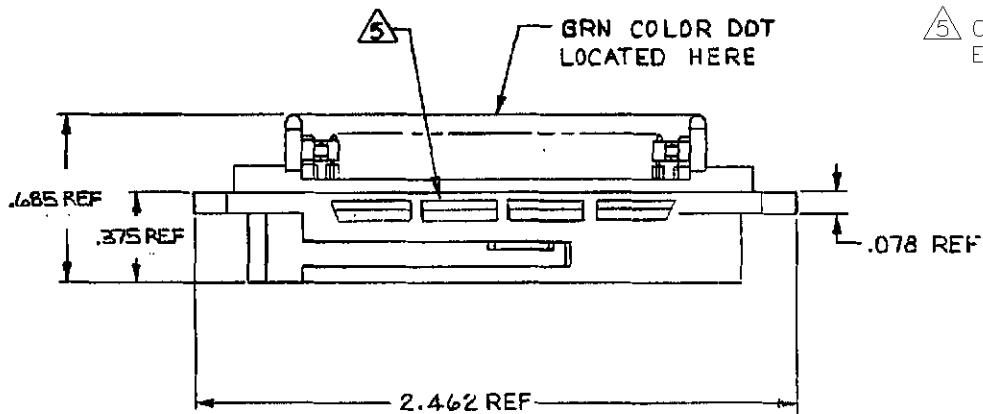

AS SHOWN	552318-1
DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SANDY LITTLE 6-23-77	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK R. REICH 6-24-77		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. HEGE 4-28-78	NAME PLUG ASSY, 36 POSITIONS, C SLOT BAIL LOCK, CHAMP-LOK	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC -	RESTRICTED TO -	
MATERIAL		APPLICATION SPEC -	SIZE A3	CAGE CODE 00779
②		FINISH ②	DRAWING NO C=552318	SCALE NTS
CUSTOMER DRAWING			SHEET 1 OF 1	REV H