

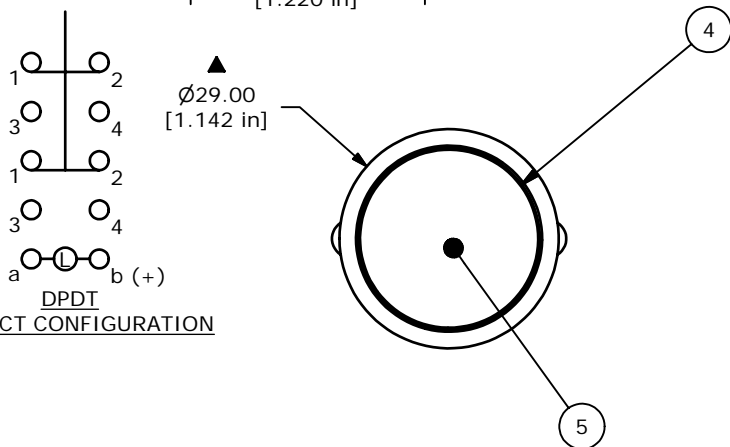


ISOMETRIC

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F060615	LASEEU12
2	1	F051701	29MM RING FOR LA SERIES
3	1	F060250	29MM LA U1 NUT
4	1	F061296	29MM YELLOW LENS
5	1	F050421	12V YELLOW LED



DPDT CONTACT CONFIGURATION

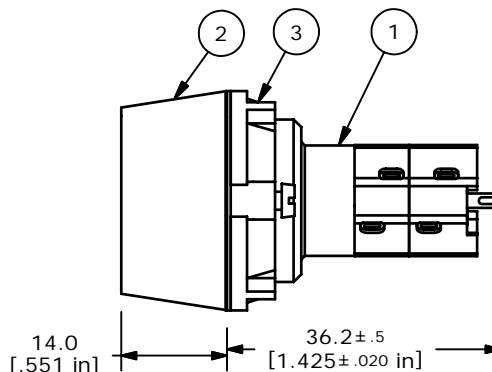

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 5 AMPS @ 250VAC UL, VDE APPROVED
6 AMPS @ 24VDC UL, VDE APPROVED
5. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
7. OPERATING TEMP.: -25°C to 55°C
- ▲ 8. LAMP VOLTAGE: 12V YELLOW LED
9. ▲ DENOTES CRITICAL PARAMETER.



B	15624	UPDATED PARTS LIST	12/21/05	PH
A	15618	RELEASED FOR PRODUCTION	12/20/05	PH
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE LASEEU12JYELYEL				
SCALE	DATE	DR	DWG	REV
1:1	12/20/2005	PH	XF0660P	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED