
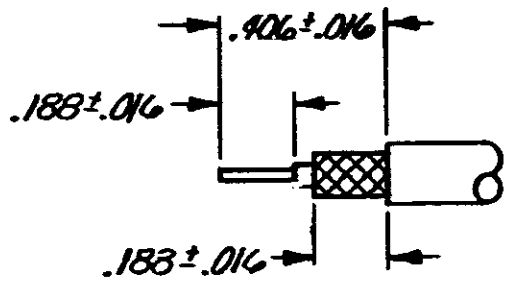


REVISIONS

REV	DATE	DESCRIPTION	APPROVED
0	2/24/84	NPS 83-3806	T.S./H. SC
A	3-23-84	ADD TO CABLE CALLOUT AJ-392	M.S. C.E.
B	3/30/88	ADD ALIGNMENT RING PER AJ-3009	DBM/KJH

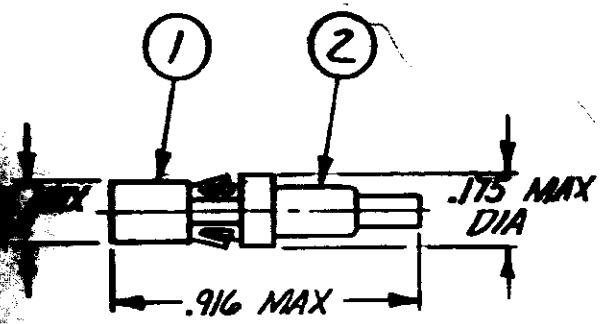

RECOMMENDED STRIP LENGTH

- 1 180 MIN DIA HOLE REQUIRED FOR CONTACT TO FEED THROUGH PRINTED CIRCUIT BOARD.
- 2 SEE S. 2923
- 3 FOR USE WITH: GORE TEX CXN 1644, RG-179/U, 179A/U, 179B/U, & 187/U CABLE.
- 4 USE CRIMPING TOOL 220215-2
- 5 ITEM 3 IS USED TO STABILIZE CONTACT IN THE HOUSING CAVITY; OTHERWISE DISCARD.

ITEM	QTY	DESCRIPTION	PART NO
3	1	RING, ALIGNMENT	222000-1
2	1	FERRULE	228538-3
1	1	SOCKET ASSY	227623-2

CONTRACT NO	
DR	T. Smith 2/24/84
CHKD	D.S. Heide 2/24/84
APPD	J. Cohen 2-23-84
APPD	K.K. Goff 2/24/84
DSGN APPD	
OTHER APPD	T. Smith 2/24/84

<p><b>AMP</b>   AMP INCORPORATED Harrisburg, Pa. 17105</p>		
<p>NAME CONNECTOR, COAXIAL, MULTIPLE, SOCKET, CONTACT, MICROMINIATURE</p>		
SIZE	FSCM NO	DRAWING NO
<b>A</b>	<b>00779</b>	<b>227605-4</b>
SCALE	SHEET	
<b>NTS</b>		