REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XB2ACOLOR
   HOUSING : MOLDED NYLON TYPE 6,6. AVAILABLE IN BLACK, RED, YELLOW.
   KNOB: MOLDED PLASTIC. AVAILABLE IN BLACK, RED, YELLOW.
   NEEDLES: SPRING TEMPER MUSIC WIRE. TIN PLATED.
   NEEDLE CLUSTER HOUSING: BRASS. TIN PLATED
   CLAMPING SCREW: STAINLESS STEEL.

2. P/N: 9306COLOR
   HOUSING: MOLDED NYLON 6,6. AVAILABLE IN BLACK, RED, YELLOW.
   SOCKET & BANANA PLUG: BRASS. NICKEL PLATED.
   CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.
   HARDWARE: BRASS EYELET. COPPER FINISH, TIN PLATED TERMINAL RING.

3. P/N: W-600/COLOR
   18AWG 65X36 TINNED COPPER
   0.144 [3.66] O.D. PVC INSULATION
   AVAILABLE IN TEN COLORS.

3. PERFORMANCE
   MAXIMUM CURRENT: 500 MILLIAMPS
   MAXIMUM VOLTAGE: <33 V AC < 70 V DC
   MAXIMUM TEMPERATURE: 221°F (105°C)

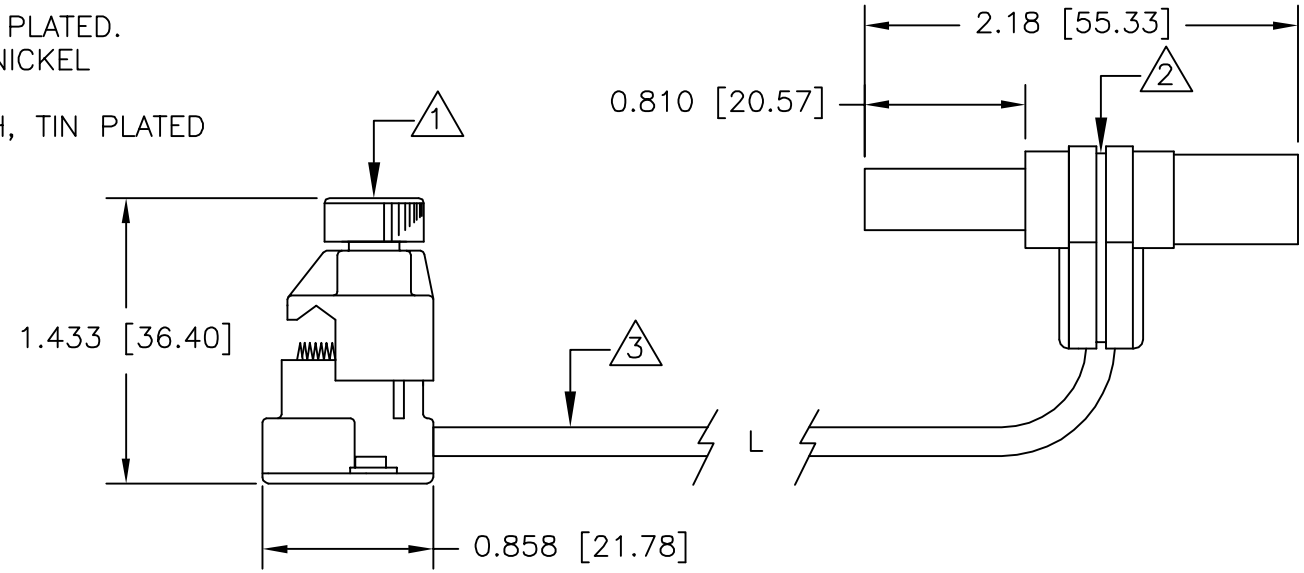

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ± DECIMALS .XX ± .XXX ± ANGLES ±	CONTRACT NO.	E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS / DATE	
			DRAWN R.L. 11/11	DESCRIPTION
		MATERIAL SEE NOTE.	APPROVED BY	INSULATION PIERCING XB TO STK SHRD R/A STD BAN PLUG
		FINISH SEE NOTE.		SIZE A / CODE IDENT NO. 08505 / DRAWING NO. 636XB / REV.
NEXT ASSY	USED ON			
APPLICATION		DO NOT SCALE DRAWING		SCALE 1:1 / SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.