


NOTES: UNLESS OTHERWISE SPECIFIED

- CONSTRUCTION:
INSULATOR: P.V.C. AVAILABLE IN BLACK OR RED.
CONTACT: ANACONDA 7021 OR BOILCAT C97.
GOLD PLATED.
SOCKET: BRASS, TIN PLATED.

- PERFORMANCE:
MAXIMUM CURRENT: 4 AMPS
MAXIMUM VOLTAGE: 300 V
MAXIMUM TEMPERATURE: 122°F (50°C)

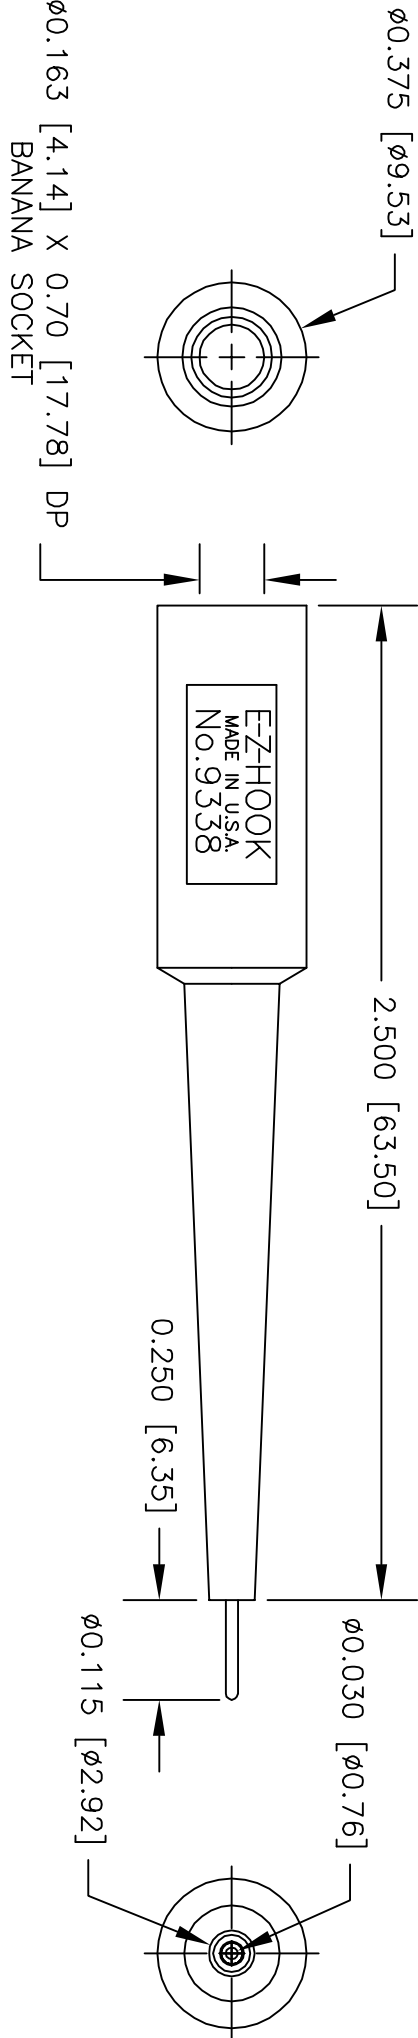

REVISIONS		DATE	APPROVED
LTR			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± .XXX ±

CONTRACT NO.		DESCRIPTION	
APPROVALS	DATE	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
DRAWN	R.L.	1/11	
APPROVED BY			
MATERIAL		DESCRIPTION	
SEE NOTE.		E-Z-FLEX BAN SKT TO 0.030 [0.76] PIN ADAPTER (22AWG)	
FINISH		SIZE	CODE IDENT NO. DRAWING NO.
SEE NOTE.		A	08505 9338
NEXT ASSY		SCALE	REV.
USED ON		2:1	
APPLICATION		SHEET 1 OF 1	
DO NOT SCALE DRAWING			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.