

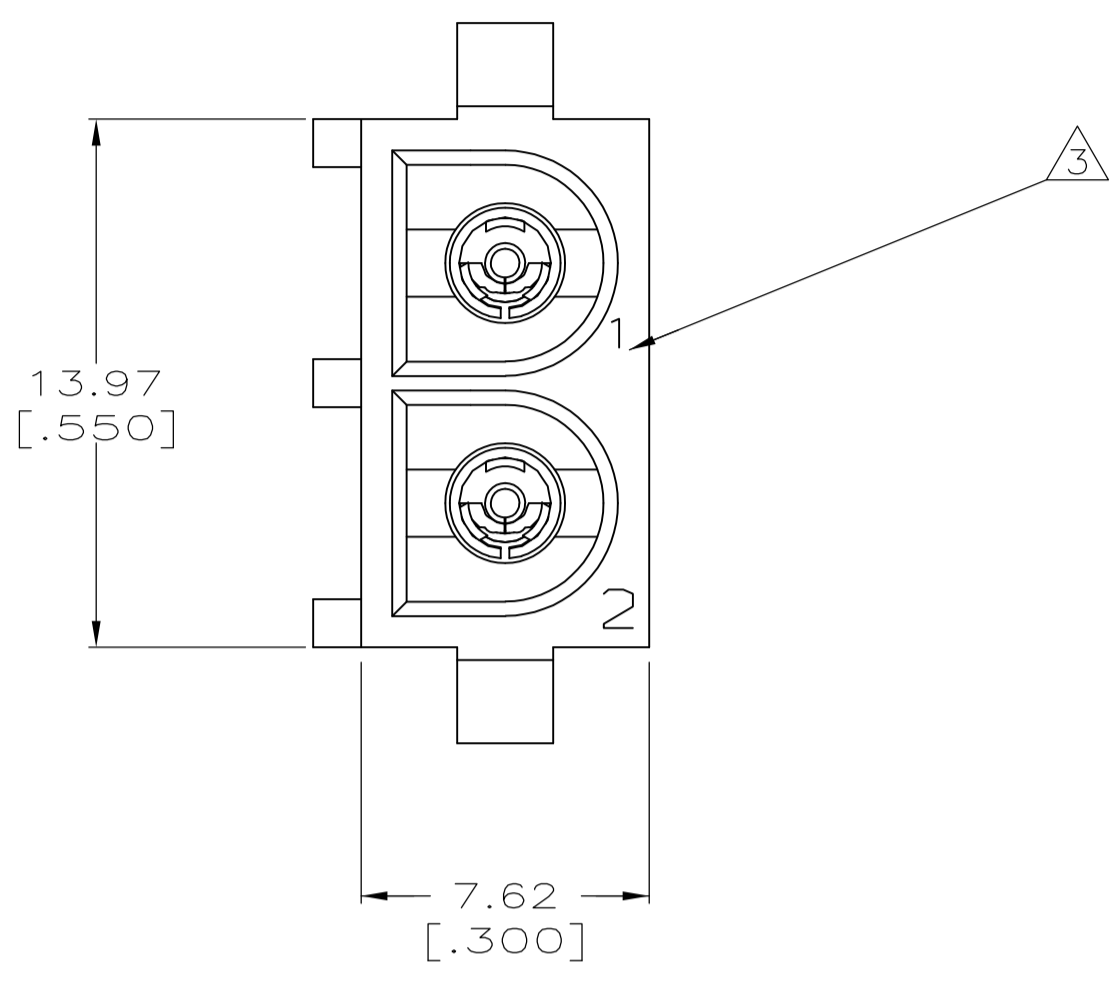
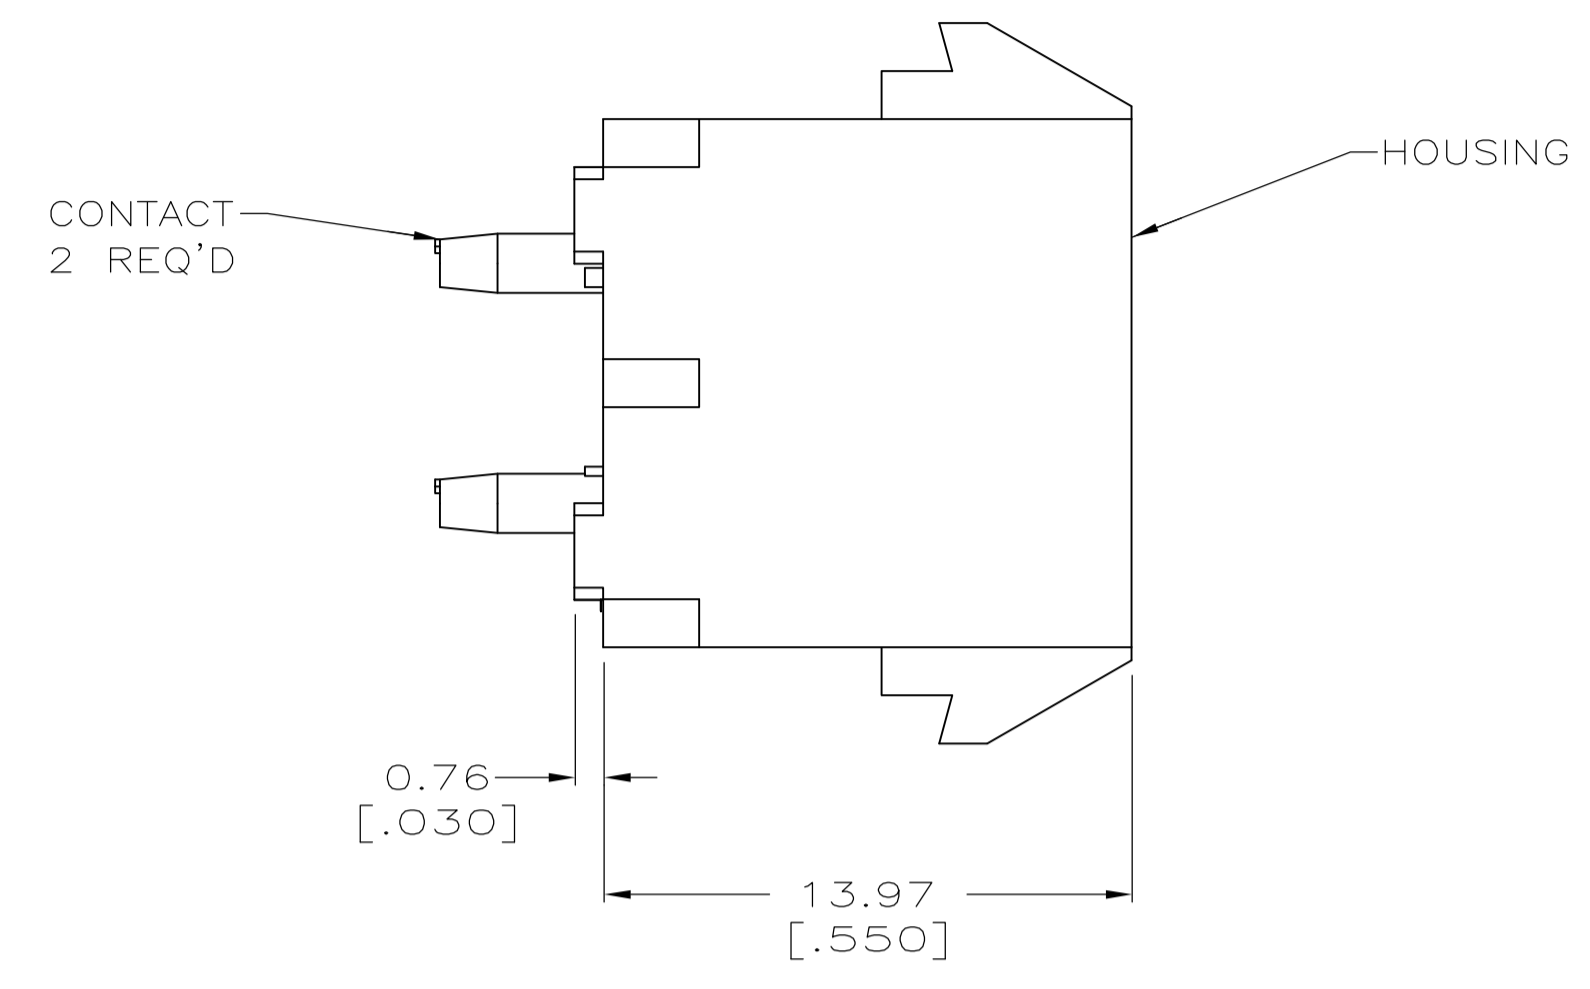
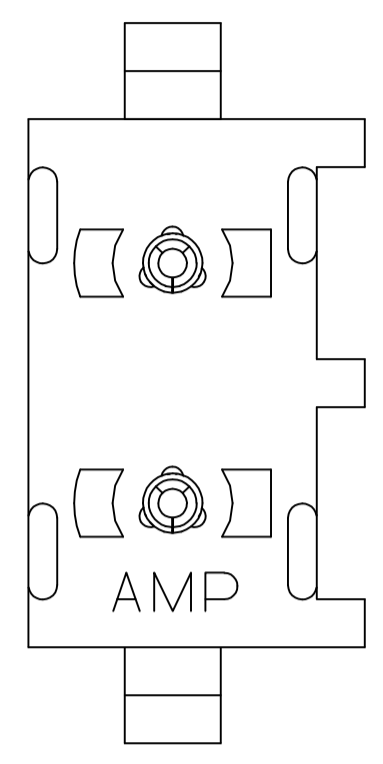
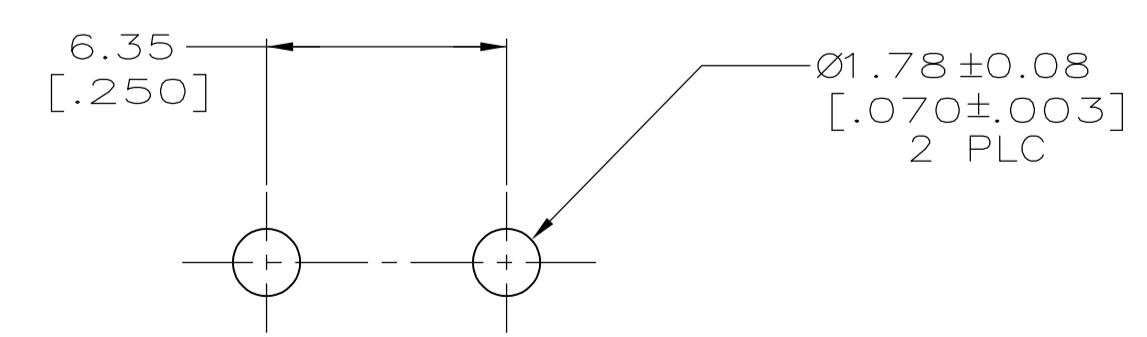


LOC		DIST		REVISIONS			
CM	00	REV	DATE	BY	CHK	APP'D	
N1	REVISED PER ECR-12-011660	25JAN13	KH	TM			

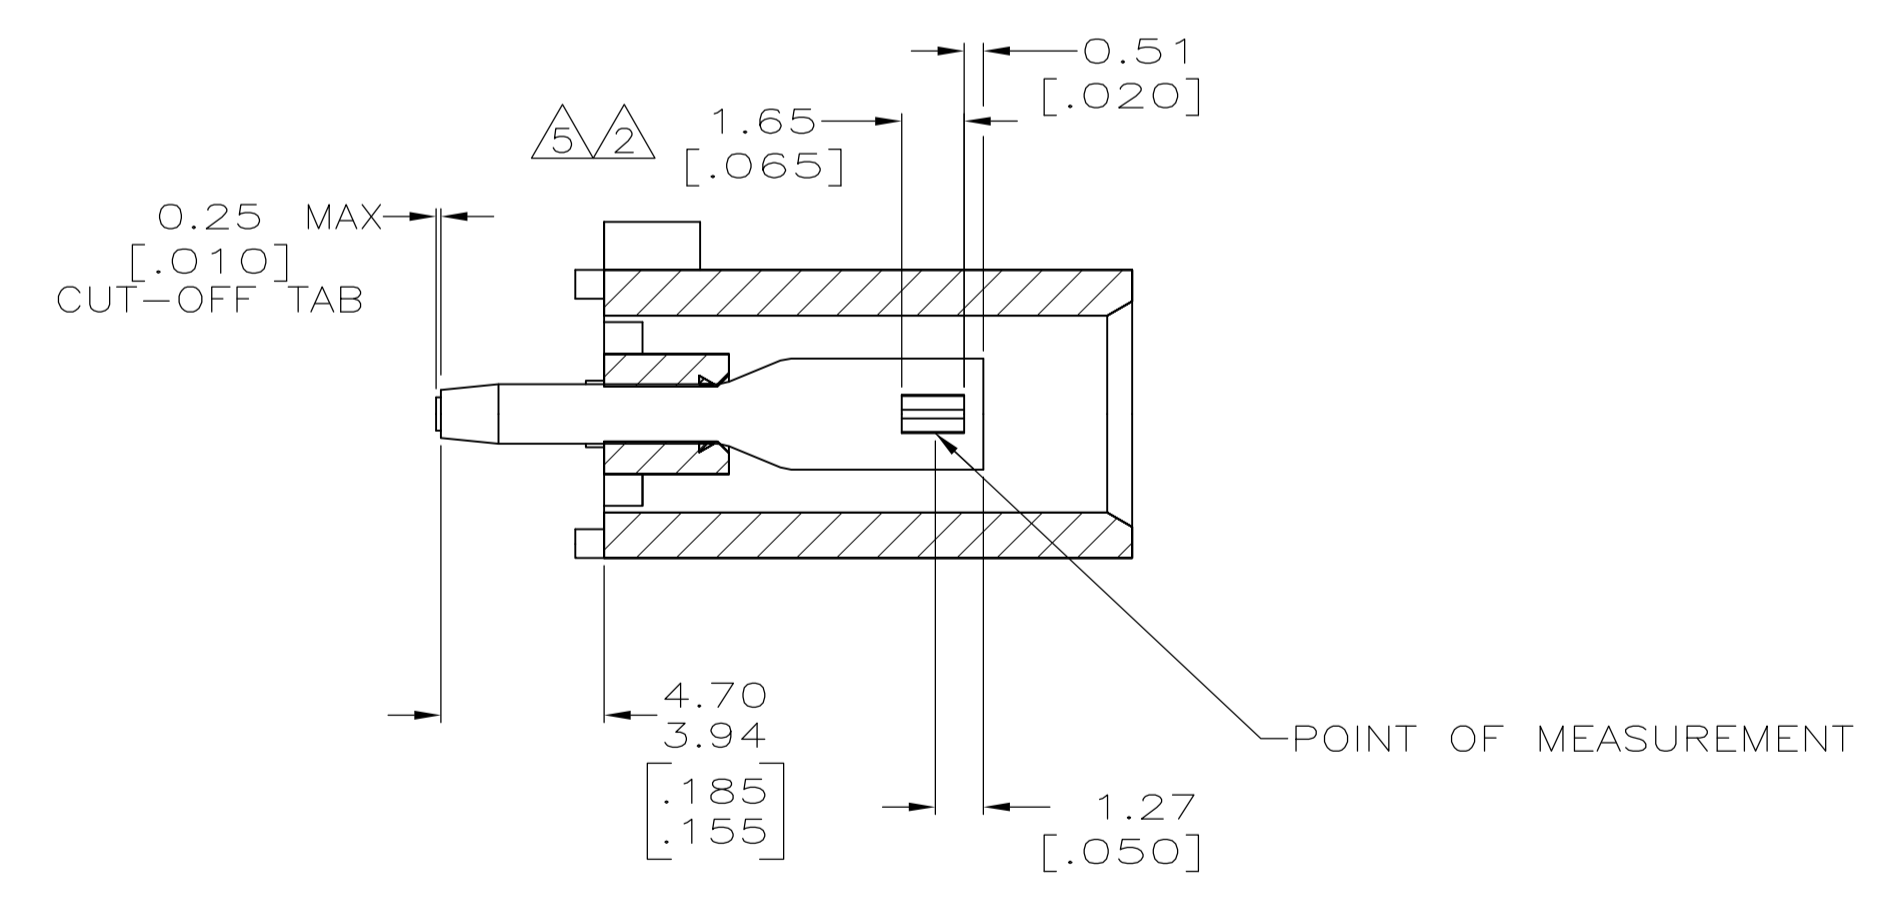

- 1 PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
- 2 CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN LEAD ON SOLDER TAIL END.
- 3 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 4 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 5 CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
- 6 SUPERSEDED BY 350824-4

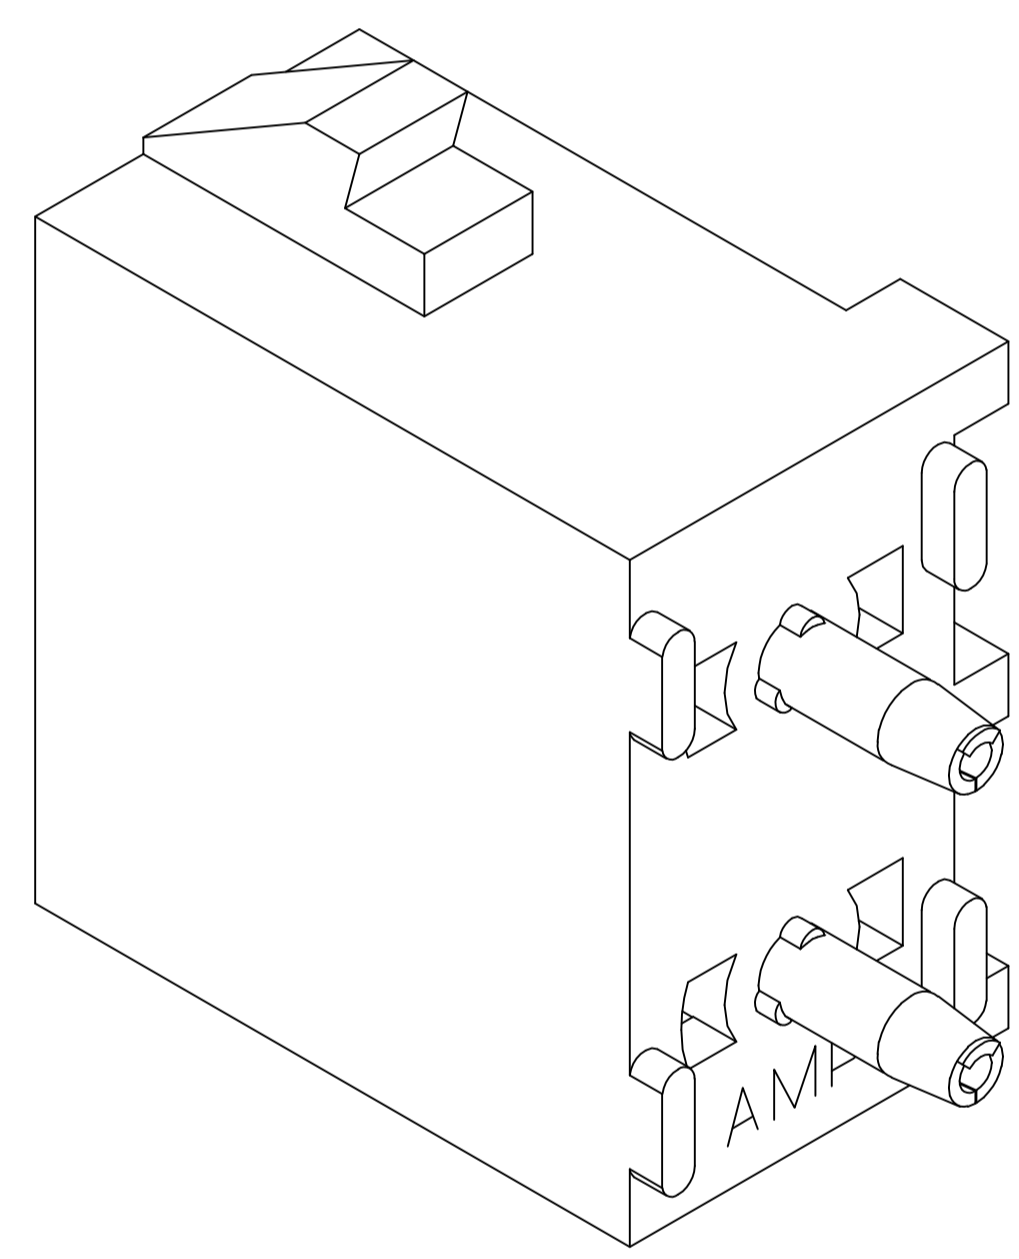

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 [.062] THICK P.C. BOARD

5	PHOSPHOR BRONZE, GOLD	NYLON,UL94V-0,WHITE	350824-4
2	PHOSPHOR BRONZE, GOLD	NYLON,UL94V-0,WHITE	350824-2
	PHOSPHOR BRONZE, PRE-TIN	NYLON,UL94V-0,WHITE	350824-1
	CONTACT MATERIAL AND FINISH	HOUSING MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 8-19-98	TE Connectivity	
DIMENSIONS: mm [INCHES]		0 PLC ± -	SOCKET HEADER ASSEMBLY, 2 CIRCUIT UNIVERSAL MATE-N-LOK™	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		1 PLC ± -	DRAWING NO. 00779C=350824	
2 PLC ± 0.13 [.005]		3 PLC ± -	SCALE 5:1 SHEET 1 OF 1 REV N1	
3 PLC ± -		4 PLC ± -	CUSTOMER DRAWING	
ANGLES ± ± 0°30'		APPLICATION SPEC		
MATERIAL SEE TABLE		FINISH SEE TABLE		