
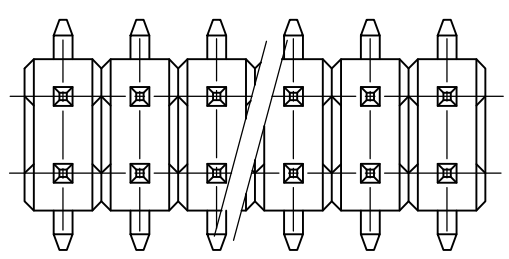
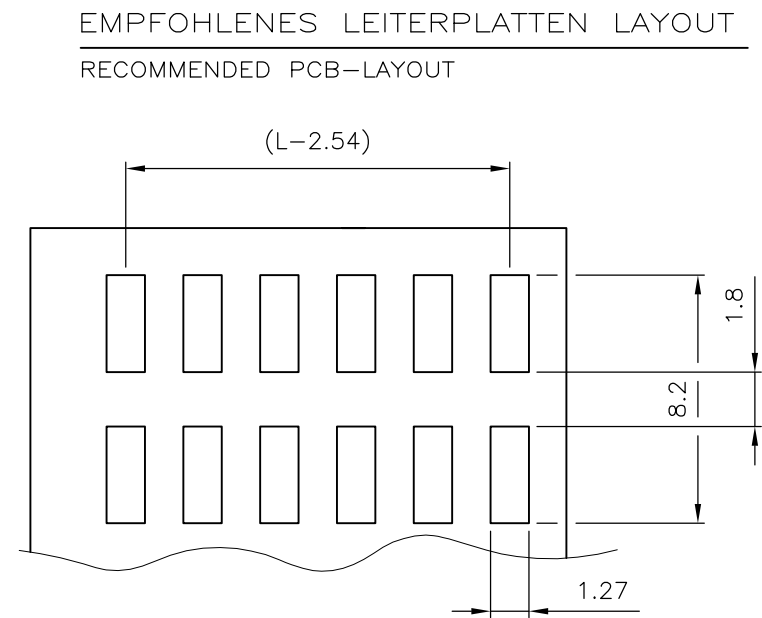
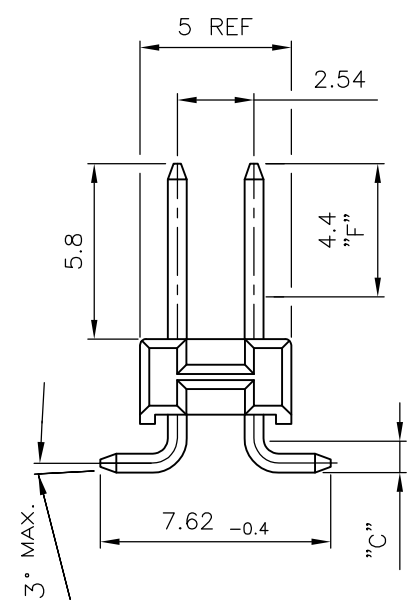


THIS DRAWING IS UNPUBLISHED  
 RELEASED FOR PUBLICATION APR , 1995.  
 © COPYRIGHT 2010 By - ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS   |                                       |           |       |
|-----|------|-------------|---------------------------------------|-----------|-------|
| P   | LTR  | DESCRIPTION | DATE                                  | DWN       | APVD  |
| IR  | -    | F           | CONTACT PIN MATERIAL & PLATING CHANGE | 20JUN2014 | PS JK |

| Pos. | L <sub>-1,0</sub> |
|------|-------------------|
| 2    | 5,08              |
| 3    | 7,62              |
| 4    | 10,16             |
| 5    | 12,7              |
| 6    | 15,24             |
| 7    | 17,78             |
| 8    | 20,32             |
| 9    | 22,86             |
| 10   | 25,4              |
| 11   | 27,94             |
| 12   | 30,48             |
| 13   | 33,02             |
| 14   | 35,56             |
| 15   | 38,1              |
| 16   | 40,64             |
| 17   | 43,18             |

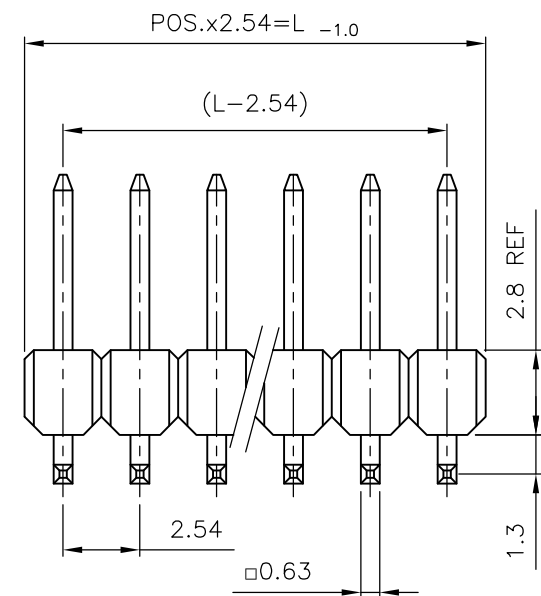




1 MATING SIDE: AREA "F" MIN 0.7µm PdNi + MIN 0.1µm GOLD FLASH OVER 1.27µm NICKEL  
 SOLDER SIDE: 3.0 TO 5.0µm TIN OVER 1.27µm NICKEL

|  |                       |                                       |       |
|--|-----------------------|---------------------------------------|-------|
| KONTAKTSTIFT / CONTACT PIN               | Cu Zn                 | 1                                     | 2     |
| STIFTGEHÄUSE / PIN HOUSING               | PCT-GF                | SCHWARZ / BLACK                       | 1     |
| BENENNUNG EINZELTEIL<br>PART DESCRIPTION | WERKSTOFF<br>MATERIAL | OBERFLÄCHE / FARBE<br>SURFACE / COLOR | SI No |

|   |     |                                    |  |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
|---|-----|------------------------------------|--|------------------------|---|-----|-----|---|-----|-----|---|-----|-----|---|-----|-----|--------|--|---|--------|--|---|---------------------------|------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT.  |     | DWN<br>A.HO<br>23.03.95            | TE Connectivity  |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
| DIMENSIONS:<br>mm   |     | CHK<br>M.SCHAARSCHMIDT<br>23.03.95 |  |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>TOL ± 0.2   |     | APVD<br>-                          | NAME<br>AMPMODU II PIN HEADER , SMD,<br>PACKED IN TUBE |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
| <table border="1"> <tr><td>0</td><td>PLC</td><td>± -</td></tr> <tr><td>1</td><td>PLC</td><td>± -</td></tr> <tr><td>2</td><td>PLC</td><td>± -</td></tr> <tr><td>3</td><td>PLC</td><td>± -</td></tr> <tr><td>4</td><td>PLC</td><td>± -</td></tr> <tr><td colspan="2">ANGLES</td><td>±</td></tr> <tr><td colspan="2">FINISH</td><td>±</td></tr> </table> |     | 0                                  | PLC  | ± -                    | 1 | PLC | ± - | 2 | PLC | ± - | 3 | PLC | ± - | 4 | PLC | ± - | ANGLES |  | ± | FINISH |  | ± | PRODUCT SPEC<br>108-18012 | SIZE<br>A3 |  |
| 0   | PLC | ± -                                |  |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
| 1   | PLC | ± -                                |  |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
| 2   | PLC | ± -                                |  |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
| 3   | PLC | ± -                                |  |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
| 4   | PLC | ± -                                |  |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
| ANGLES  |     | ±                                  |  |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
| FINISH  |     | ±                                  |  |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
| MATERIAL<br>SEE TABLE   |     | APPLICATION SPEC<br>-              | CAGE CODE<br>00779                                     | DRAWING NO<br>C-966269 |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
| MATERIAL<br>SEE TABLE   |     | WEIGHT<br>-                        | RESTRICTED TO<br>-                                     |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
| CUSTOMER DRAWING  |     |                                    | SCALE<br>2:1   | SHEET<br>1 OF 2        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |
|   |     |                                    | REV<br>F   |                        |   |     |     |   |     |     |   |     |     |   |     |     |        |  |   |        |  |   |                           |            |  |

THIS DRAWING IS UNPUBLISHED  
 RELEASED FOR PUBLICATION APR , 1995.  
 © COPYRIGHT 2010 By - ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS |     |             |      |     |      |
|-----|------|-----------|-----|-------------|------|-----|------|
| IR  | -    | P         | LTR | DESCRIPTION | DATE | DWN | APVD |
|     |      | -         |     | SEE SHEET 1 | -    | -   | -    |

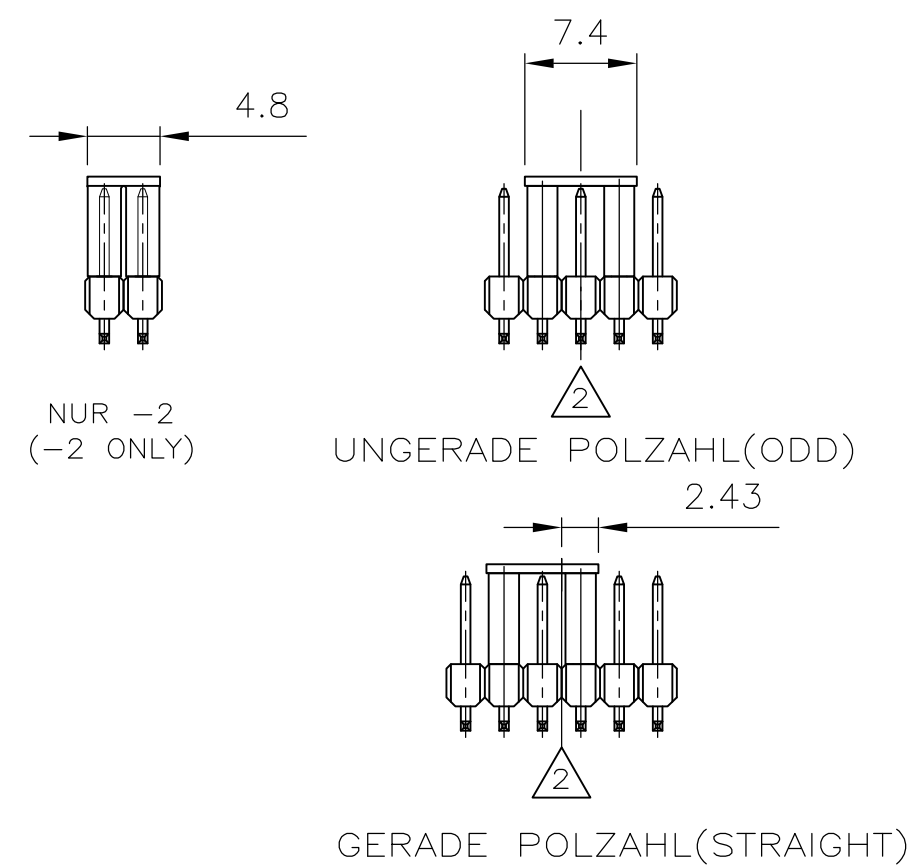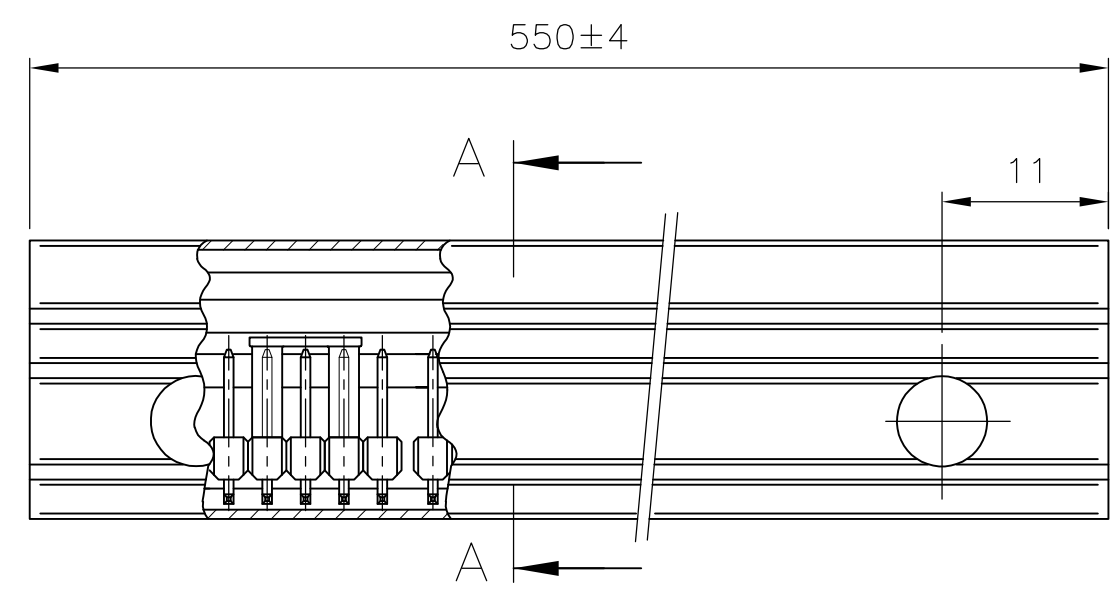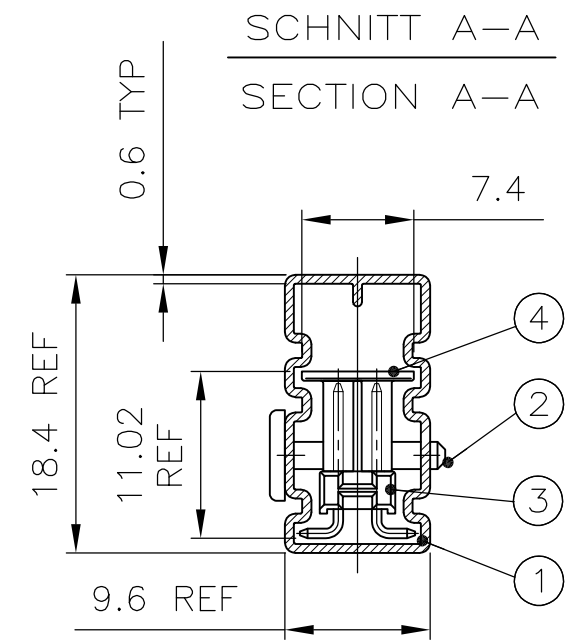

- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 4 OBSOLETE
- 3 SIEHE TABELLE / SEE TABLE
- 2 MITTELLINIE DER STIFTLAISTE / CENTER LINE OF THE PIN ROW
- 1 AMPMODU II SMD-STIFTLAISTE SIEHE BLATT 1 VON 2. / AMPMODU II SMD-PIN ROW SEE SHEET 1 OF 2.

| 1-966 269-0            | 10                             | 20                                 |            |
|------------------------|--------------------------------|------------------------------------|------------|
| <del>966 269-9</del>   | 9                              | 23                                 | OBSOLETE 5 |
| 966 269-8              | 8                              | 25                                 |            |
| 4 966 269-7            | 7                              | 29                                 |            |
| 4 966 269-6            | 6                              | 34                                 |            |
| 966 269-5              | 5                              | 41                                 |            |
| 966 269-4              | 4                              | 51                                 |            |
| 966 269-3              | 3                              | 69                                 |            |
| 4 966 269-2            | 2                              | 108                                |            |
| BESTELL-NR. / PART NO. | POLZ. PROREIHE / POLZ. PER ROW | VERPACKUNGS-EINHEIT / PACKING UNIT |            |

| S.TABELLE<br>SEE TABLE | 4    | 3             | ADAPTER                                 | PCT-GF             | SCHWARZ / BLACK                      | 4     |
|------------------------|------|---------------|---|--------------------|--------------------------------------|-------|
|                        | 3    | 3             | AMPMODU II STIFTL., SMD                 | 1                  | 1                                    | 3     |
|                        | 2    | 2             | VERSCHL. STIFT / LOCKS PIN              | PP                 | ROT                                  | 2     |
|                        | 1    | 1             | VERPACKUNGSROHR / PACKING PIPE          | ANTI-STATISCH      | TRANSPAR.                            | 1     |
| BESTELL-NR. / PN       | POS. | STÜCK / PIECE | BENENNUNG EINZELTEIL / PART DESCRIPTION | WERKSTOFF MATERIAL | OBERFLÄCHE / FARBE / SURFACE / COLOR | SI No |

THIS DRAWING IS A CONTROLLED DOCUMENT.

|                    |   |                        |  |       |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |
|--------------------|---|------------------------|--|-------|-------|---|-------|---|-------|---|-------|---|--------|---|--------|---|------------------------------|------|
| DIMENSIONS: mm     | TOLERANCES UNLESS OTHERWISE SPECIFIED: TOL ± 0.2  | DWN A.HO 23.03.95      | TE Connectivity<br>AMPMODU II PIN HEADER , SMD, PACKED IN TUBE |       |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |
|                    | <table border="1"> <tr><td>0 PLC</td><td>± 0.2</td></tr> <tr><td>1 PLC</td><td>±</td></tr> <tr><td>2 PLC</td><td>±</td></tr> <tr><td>3 PLC</td><td>±</td></tr> <tr><td>4 PLC</td><td>±</td></tr> <tr><td>ANGLES</td><td>±</td></tr> <tr><td>FINISH</td><td>±</td></tr> </table> | 0 PLC                  |  | ± 0.2 | 1 PLC | ± | 2 PLC | ± | 3 PLC | ± | 4 PLC | ± | ANGLES | ± | FINISH | ± | CHK M.SCHAARSCHMIDT 23.03.95 | NAME |
|                    |   | 0 PLC                  |  | ± 0.2 |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |
|                    |   | 1 PLC                  |  | ±     |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |
| 2 PLC              | ±   |                        |  |       |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |
| 3 PLC              | ±   |                        |  |       |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |
| 4 PLC              | ±   |                        |  |       |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |
| ANGLES             | ±   |                        |  |       |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |
| FINISH             | ±   |                        |  |       |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |
| MATERIAL SEE TABLE | SEE TABLE   | APVD -                 | SIZE CAGE CODE DRAWING NO RESTRICTED TO                        |       |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |
|                    |   | PRODUCT SPEC 108-18012 | A3 00779 C-966269  |       |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |
|                    |   | APPLICATION SPEC -     | SCALE 2:1 SHEET 2 OF 2 REV F                                   |       |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |
|                    |   | WEIGHT -               | CUSTOMER DRAWING   |       |       |   |       |   |       |   |       |   |        |   |        |   |                              |      |