


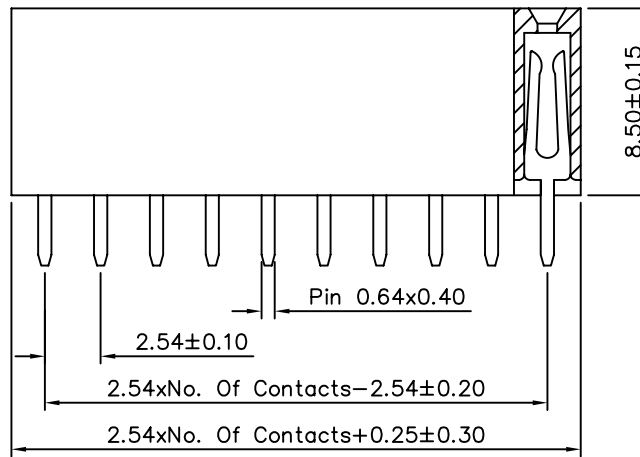


SPECIFICATIONS

Current Rating: 3 Amp
 Insulator Resistance: 1000 Megohms Min.
 Contact Resistance: 20 Milliohms Max.
 Dielectric Withstanding: AC 1000V/Minute
 Operating Temperature: -40°C To +105°C
 Contact: Brass, Gold Flash Over All
 Insulator: Polyester, PBT+30%GF, UL 94V-0

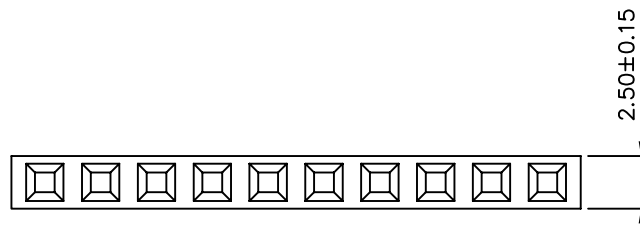

Recommended PCB Hole Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

00548

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.


SCALE

NONE

REV.

A1

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

△ A1	Modify Data	BECKY	09/30/2005
------	-------------	-------	------------

△ A0	NEW RELEASE	BECKY	07/30/2004
------	-------------	-------	------------