

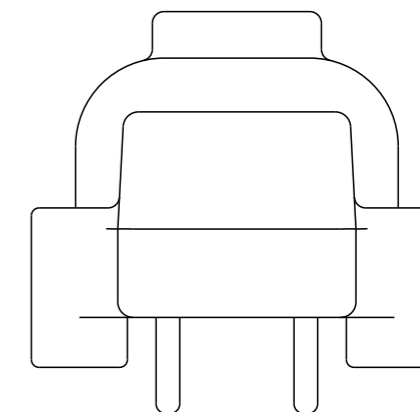
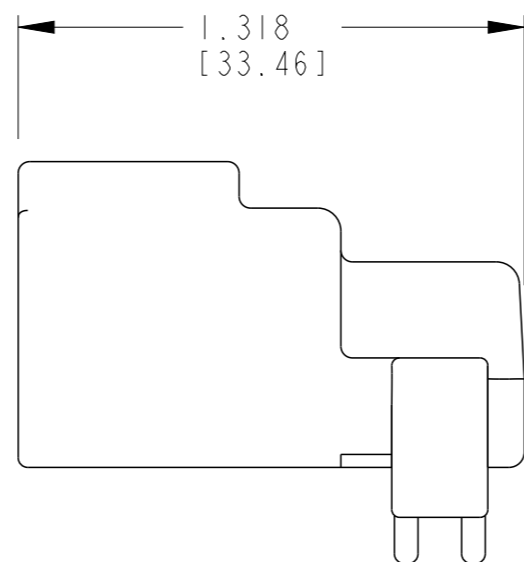
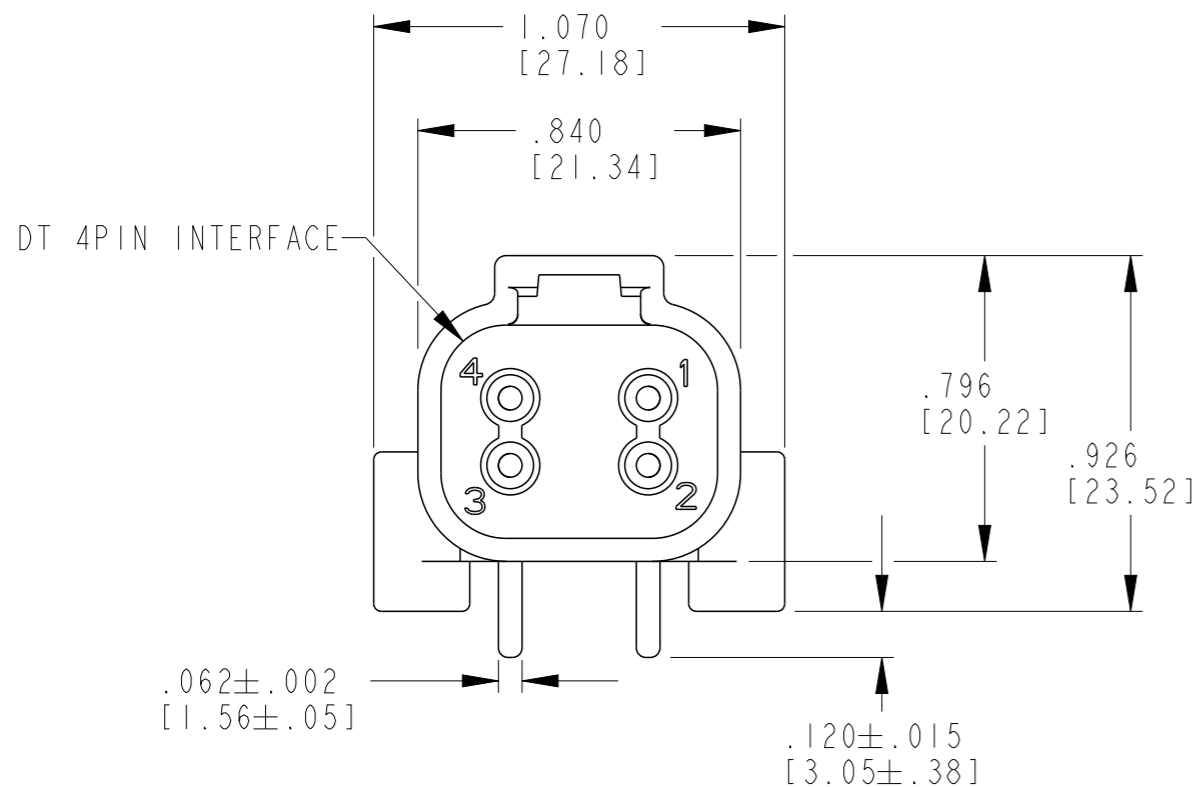
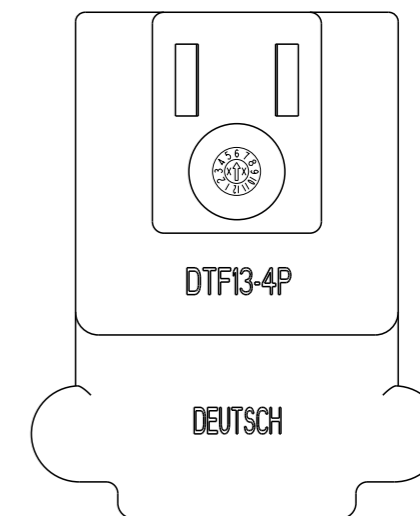


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECO-16-014754	02AUG2016	VNB	DM

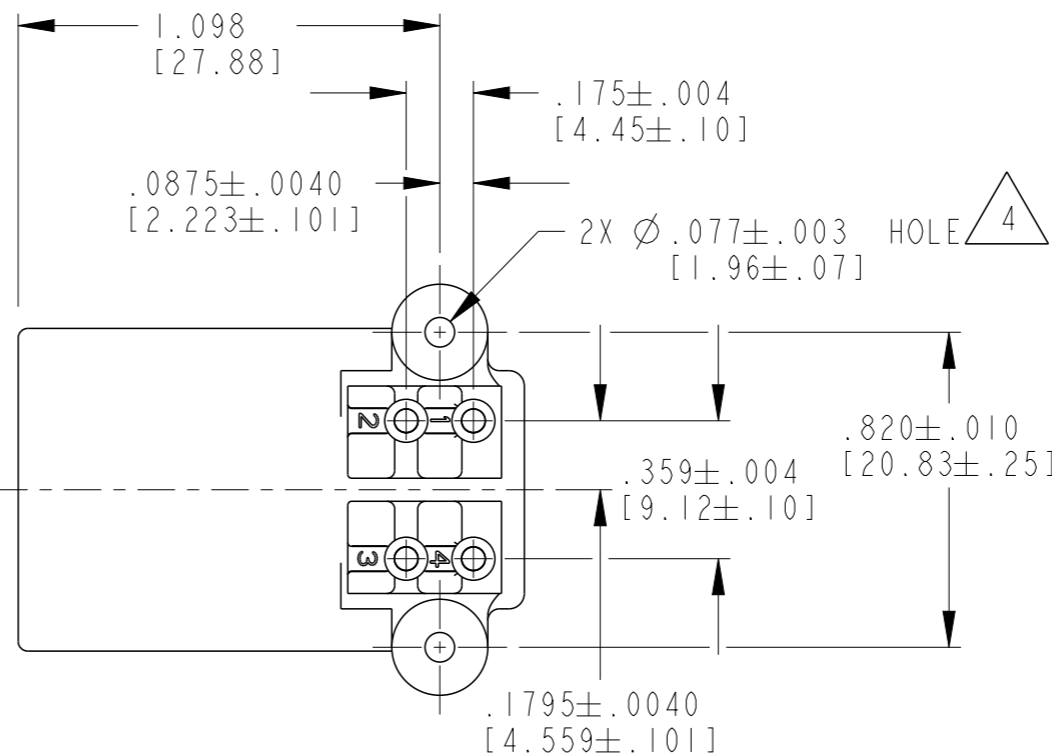

3D VIEW



- 4 RECOMMENDED SCREW: 2-28 [M2.26X0.91]. PLASTITE 48, SINGLE HELIX.
- 3. THE RECEPTACLE MATES WITH DT06-4S-XXXX PLUG AND W4S WEDGE LOCK (XXXX = ALL MODIFICATIONS).
- 2 PIN PLATING: MATING SIDE: TIN (RoHS)
PCB SIDE: TIN (RoHS)
- 1 MATERIAL: RECEPTACLE - PA46 GF30 (BLACK)
PINS - COPPER ALLOY.

NOTES: UNLESS OTHERWISE SPECIFIED

TE INTERNAL PN	DEUTSCH PN
DTF13-4P	DTF13-4P

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	08AUG2000	TE TE Connectivity
		CHK	M. GONZALEZ 12SEP2000	
		APVD	C. WOODRUFF 12SEP2000	
		PRODUCT SPEC	C. WOODRUFF	
DIMENSIONS: INCH [mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME
		0 PLC ±-		90 DEGREE RECEPTACLE FLANGELESS CONNECTOR 4 PIN 16 SIZE CONTACTS, KEY NONE
		1 PLC ±-		
		2 PLC ±-		SIZE
		3 PLC ±.025 [0.63]		CAGE CODE
		4 PLC ±-		DRAWING NO
		ANGLES ±° 30' 0"		RESTRICTED TO
MATERIAL	FINISH	WEIGHT	10.2g	A3
CUSTOMER DRAWING		SCALE 2:1		SHEET 1 OF 1
		REV A		