


NOTES:

- 1.0 SPECIFICATIONS:
 - 1.1 FREQUENCY RANGE: DC to 500 MHz
 - 1.2 MAXIMUM INPUT POWER:
 - +25°C 2 WATTS
 - +125°C 0.5 WATTS
 - 1.3 OPERATING TEMPERATURE RANGE:
 - 55°C to +125°C
 - 1.4 MAXIMUM VSWR: 1.25:1
 - 1.5 IMPEDANCE: 50 OHMS

2.0 MARKING

- 2.1 MARK UNIT AS SHOWN
(REF.: INK-02641-27-01)

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

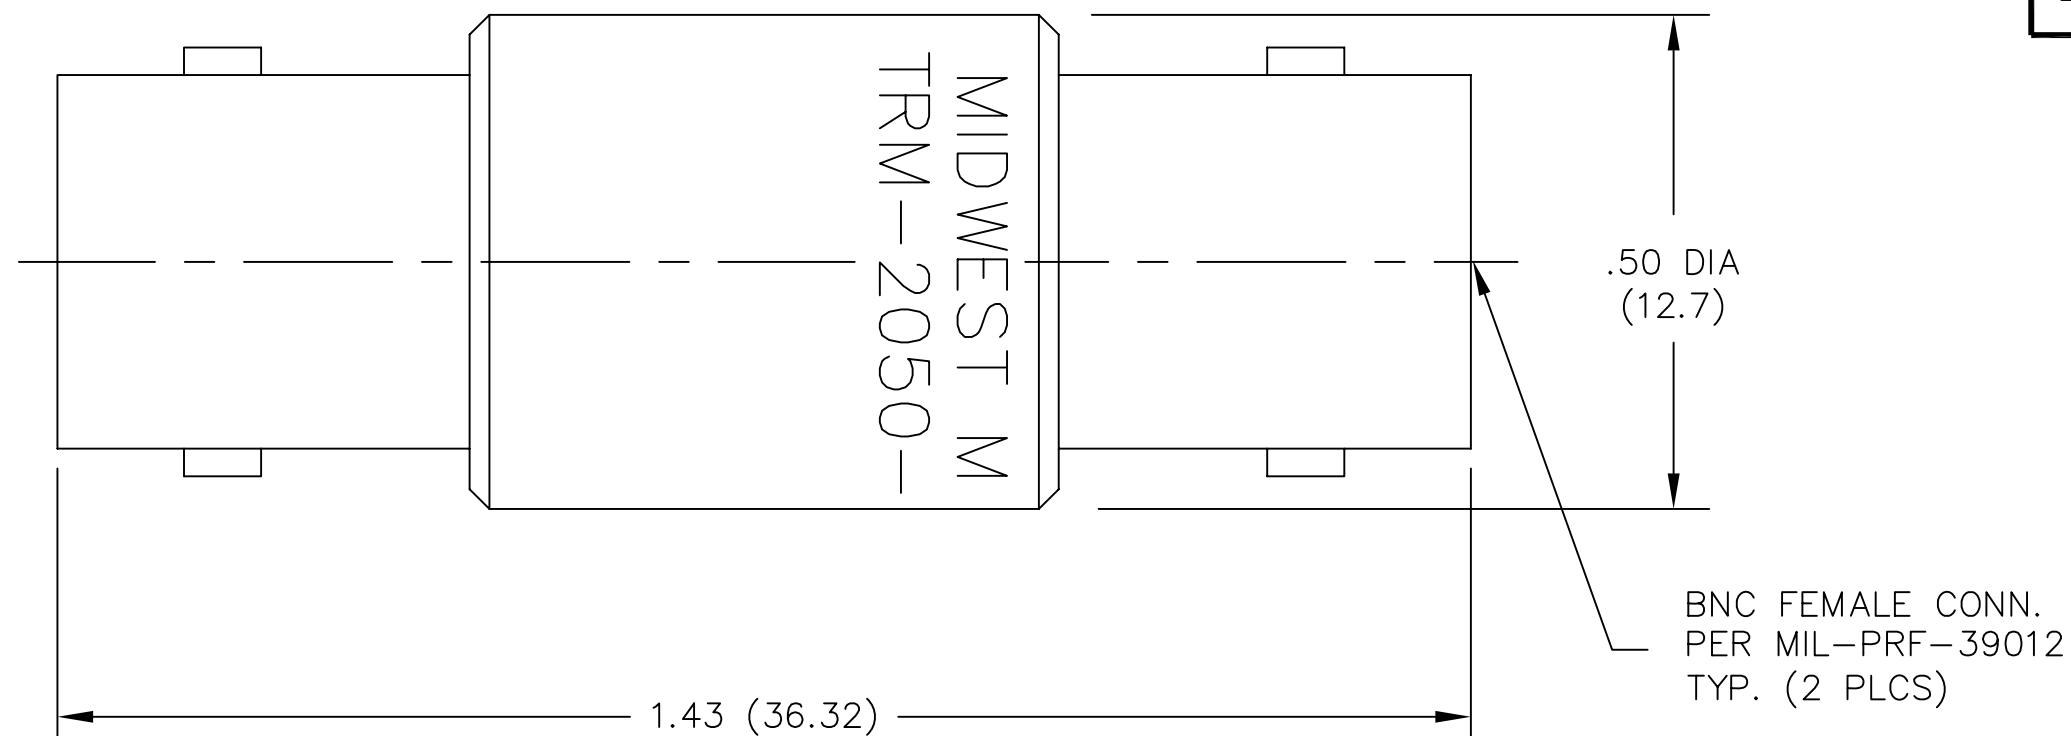

REV.	DESCRIPTION	DATE
-	RELEASED	7/25/01
-1	ADDED TITLEBLOCK	10/26/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	FSCM NO. 34078	MIDWEST MICROWAVE		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION	
	DRAWN/DATE S.ORLOV 7/24/01	ENG./DATE G.KOZAK 7/25/01	DRAWING NUMBER TRM-2050-FF-BNC-10	
	CHECKED/DATE	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1