

SUMMARY

Wires

| | |
|---------|---|
| Low | 0 |
| High | 0 |
| Coax | 1 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

| | |
|------------------|----------------|
| Series | 00 |
| Termination type | Male solder |
| IP rating | 50 |
| Cable Ø | 1.30 - 1.70 mm |
| Matching parts | ERA.00.250.NTL |
| Status | |
| Alternative part | |

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | FFA*: Straight plug with cable collet and nut for fitting a bend relief |
| Keying | Circular (can rotate) |
| Housing Material | Brass (nickel plated) shell, collet nut, latch sleeve and mid pieces |
| Cable Fixing | C17: 1.3 - 1.7 mm |
| Variant | Z : Nut for fitting a bend relief |

Performance

| | |
|---------------|------------------------|
| Configuration | 0.25 : 1 Coax (50 Ohm) |
| Insulator | T: PTFE |
| Rated Current | 4 Amps |

Specifications

| | |
|---------------|-------------------------|
| Contact Type: | Coaxial 50 Ohm (Solder) |
| Max. Matings: | 5000 |
| Contact Dia.: | 0.7 mm (0.028in) |
| Bucket Dia.: | 0.6 mm (0.024in) |
| Test voltage: | 2.1 kV (rms) |
| R (max): | 6.1 mOhm |

Vtest: 2100 V (AC), 3000 V (DC)


□
Impedance: 50 Ohm
VSWR: $1.09 + 0.11 * f/\text{GHz}$

Others

Endurance (Shell): 5000 mating cycles
F ret (min): 100 N
IP Rating: 50

DRAWINGS

Draws

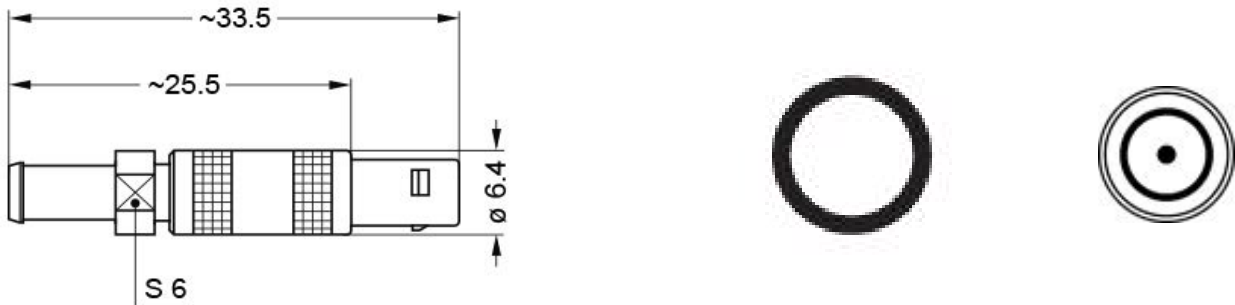

Dimensions

| | A | L | M |
|-----|------|------|------|
| mm. | 6.4 | 33.5 | 25.5 |
| in. | 0,25 | 1,32 | 1,00 |

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.00.003.PA060

Cables