

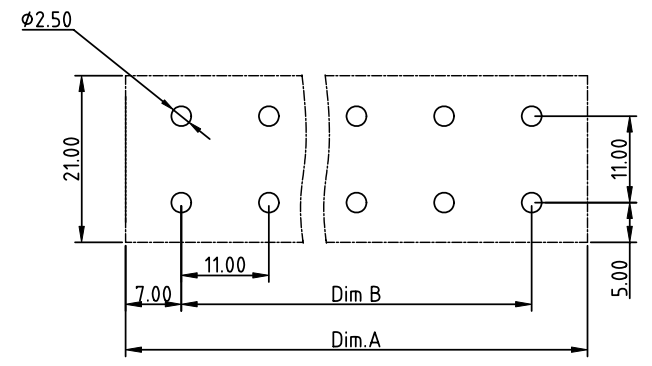
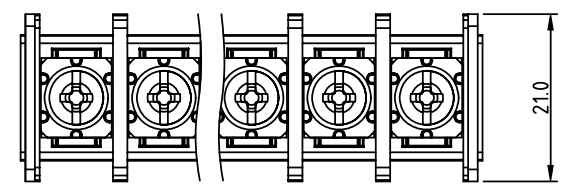
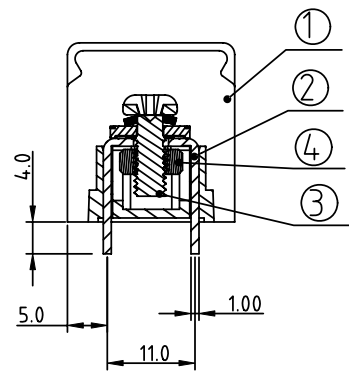


PRODUCT NUMBER	PITCH
YK70Axx0x0J0G	11.00mm

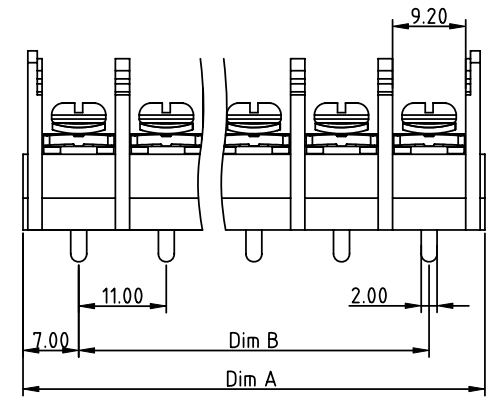

RECOMMENDED P.C.B LAYOUT  
TOP VIEW



**MATERIALS & ELECTRICAL**

**RATED VOLTAGE & CURRENT:** 300 V, 40A(B Code)/ 600V, 5A(D Code)

**WITHSTAND VOLTAGE:** AC 2500 V/Min

**INSULATION RESISTANCE:** 1000 MΩ OR MORE AT DC 1000 V

**OPERATING TEMPERATURE RANG:** -40 °C ~ +115°C

**SCREW TORQUE VALUE:** 16Lb-In.

**WIRE RANGE:** 18 - 8AWG


**1) HOUSING:** THERMOPLASTICS, UL94-V0 BLACK

**2) TERMINAL:** BRASS, 1.0t

**3) TERMINAL SCREWS:** STEEL, M4.0

**4) TERMINAL NUT:** STEEL

APPROVAL: us

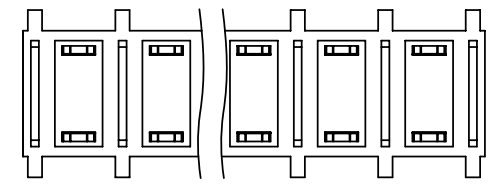

DIMENSION

Dim A	N×11.00±3.0
Dim B	(N-1)×11.0

N=Number of poles

Poles	Tolerance
2p-8p	±0.40
9p-16p	±0.50

PART NO.: YK 70Axx 0 x 0 JOG

Plated			
No. of poles	Terminal	Screw	Nut
02 2 poles	G/F	G/F	G/F
03 3 poles	G/F	Zinc	Nickel
... ..	...	...	...
16 16 poles	Tin	G/F	G/F
	Tin	Zinc	Nickel

RoHS compliant  
(lead<4%)  
In copper Alloy

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection	product family
ltr	ecn no	dr	date		TERMINAL BLOCK
tolerances unless otherwise specified				MM	title
angles				scale	TERMINAL BLOCK
X°±1'					BARRIER TYPE
dr				EVAN LU	061114
enr				EVAN LU	061114
chr				HANKE FENG	061114
appd				SHI JUN	061114
sheet index	revision sheet	A	1		dwg no
					YK70Axx0x0J0G
					sheet 1 of 1
					size A4
					type CUSTOMER Drawing