

1

2

3

4




5

6

7

A

2000 ± 50

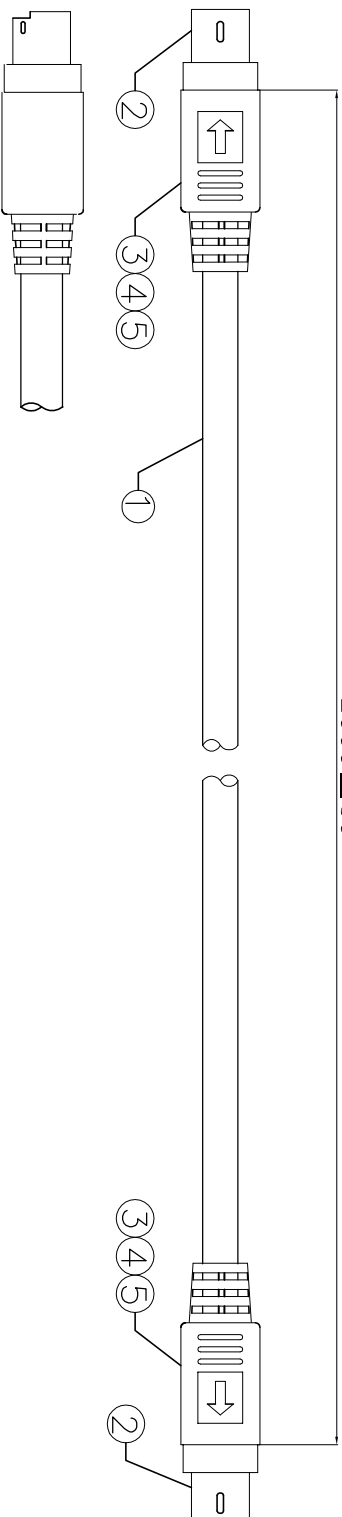

A

B

C

D


E

F

G

H

**RoHS compliant**  
Unit: mm

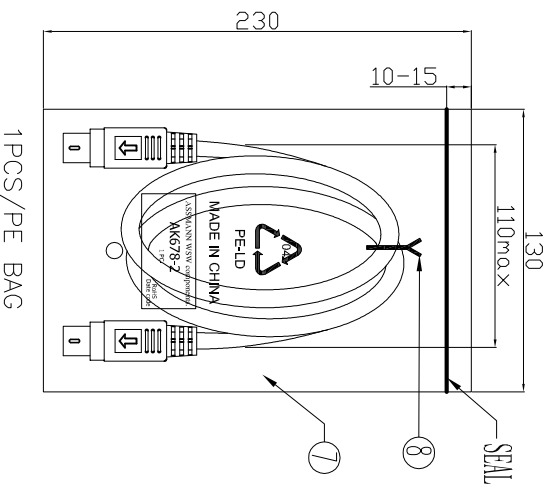

1PCS/PE BAG

### PIN ASSIGNMENT

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
SHELL	D
	SHELL

No.	TIE	QTY	NAME
⑧	1	1	WHITE L=100mm
⑦	1/10	1	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	1	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"
⑤	2	2	HEAT SHRINK TUBE BLACK OD1.5*7MM
④	5.2g	1	CLEAR LD-PE (Mould NO.:NM-65)
③	8.1g	1	PVC 40P COLOR:BEIGE(V-29)(Mould NO.WM-149)
②	2	2	MINI DIN 6PIN MALE SOLDER TYPE PIN TIN-PLATED INSULATOR COLOR:BLACK
①	1	1	NOUL 28AWG+6C+D+AL/WY JACKET:BEIGE(V-29) OD5.0mm L=2000±10MM

SPECIFICATION

### Electrical test:

- 100% short, open, miss wire test
- Conduct resistance: 2 Ohm(max)
- Insulation resistance: 10Mohm(min)
- Dielectric test: DC 300V

Scale Free

TOLERANCE

DIM TOL

Angle

TOL

Id.

Modification

Date

Name

Customer-No.

ASSMANN WSW-No.

Drawing-No.

ASS 7871 CA

AK678-2

Replace

Sheet

1

2

3

4

5

6

7

**ASSMANN**  
WSW components

H

G

H