



RoHS COMPLIANT

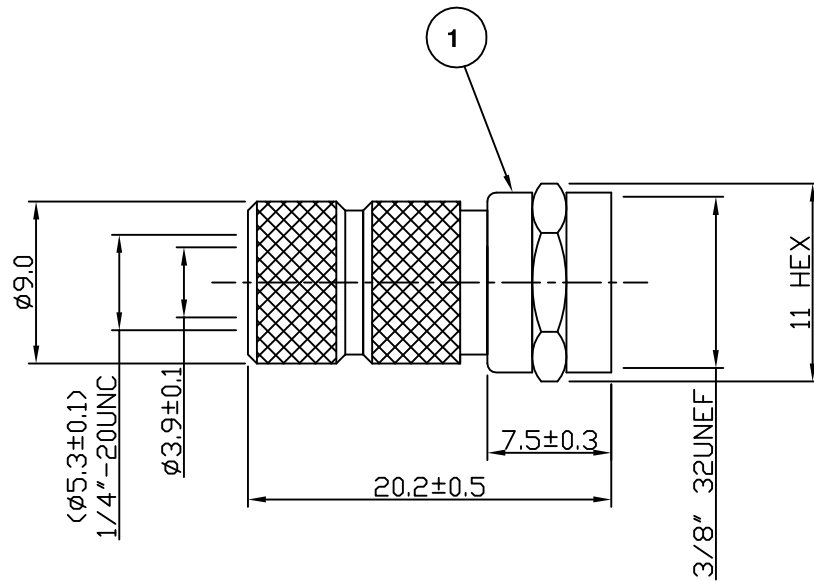

For stripping and assembly instructions see Drawing Number: VAIF1301

Electrical Characteristics

Nominal Impedance: Non Constant
 Frequency Range: DC to 2 GHz
 VSWR: 1.35:1 maximum
 Operating Voltage (rms): 250 V maximum at sea level

Mechanical Characteristics

Mating Cycles: 200 cycles minimum

Environmental Characteristics

Temperature Range: -55 °C to +85 °C

PART	DESCRIPTION
1	Body Brass, nickel plated

DESCRIPTION OF REVISION	APPVD	ISS	DATE
Altered Measurements	KA	4	12 Oct 07
CAD Issue	SN	3	12 Sep 02
Up Issue	SN	2	20 Feb 01
First Issue	SN	1	31 Jul 00



Cinch Connectivity Solutions
 7-13 Russel Way,
 Widford Industrial Estate,
 Chelmsford, Essex,
 CM1 3AA, UK.
 Tel: +44 (0) 1245 359515
 Fax: +44 (0) 1245 358938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:
 ± 0.2mm unless
 otherwise stated

DRAWN BY:

S Nash

CHECKED BY:

P Couzens

APPROVED BY:

P Couzens

DATE:

12 Sep 02

TITLE:

F Twist-On Plug for RG59

PART NUMBER:

TOF59

PAGE: 1 of 1