

INTERCONNECTS

SERIES 800 & 802 • .100" GRID (.030" DIA. PINS), SHROUDED STRAIGHT, SURFACE MOUNT & SOLDERLESS PRESS-FIT • SINGLE AND DOUBLE ROW STRIPS

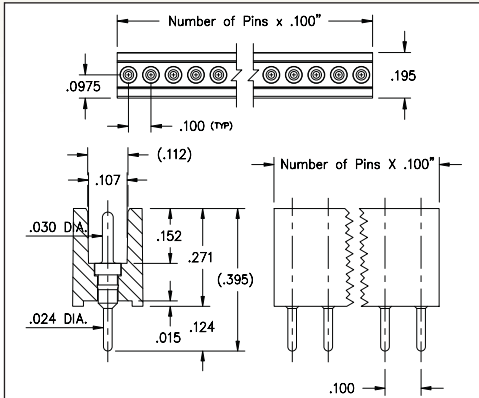


FIG. 1

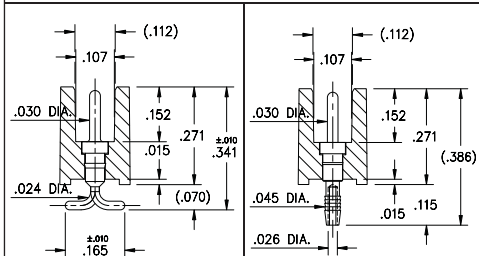


FIG. 2

FIG. 3

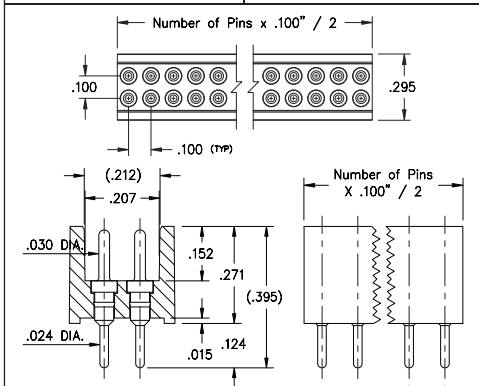


FIG. 4

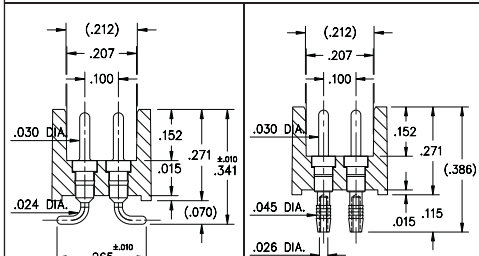


FIG. 5

FIG. 6

- Shrouded pin interconnects available with straight Series 800...10-052 and 802...10-052 or surface mount 800...30-052 and 802...30-052 use MM #5016 pins. See page 215 for details
- Shrouded pin interconnects with solderless press-fit Series 800...61-051 and 802...61-051 use MM #5607 pins. See page 213 for details. The unique compliant tail pins conform to .040"±.003" finished hole without stressing inner layers. Patent No. 4,799,904
- Insulators are high temperature thermoplastic, suitable for all soldering operations



ORDERING INFORMATION

	Series 800...10-052	Straight Pin Header
FIG. 1	800-10-0_ -10-052000	Specify number of pins 01-32
FIG. 2	Series 800...30-052	Surface Mount Pin Header
	800-10-0_ -30-052000	Specify number of pins 03-32
FIG. 3	Series 800...61-051	Compliant Tail Pin Header
	800-10-0_ -61-051000	Specify number of pins 01-32
FIG. 4	Series 802...10-052	Straight Pin Header
	802-10-0_ -10-052000	Specify number of pins 04-64
FIG. 5	Series 802...30-052	Surface Mount Pin Header
	802-10-0_ -30-052000	Specify number of pins 04-64
FIG. 6	Series 802...61-051	Compliant Tail Pin Header
	802-10-0_ -61-051000	Specify number of pins 04-64



XX=Plating Code
See Below

For
Electrical, Mechanical
& Environmental Data,
See page 264

SPECIFY PLATING CODE XX=	10 ◇		
Pin Plating	10 μ" Au		

