

5

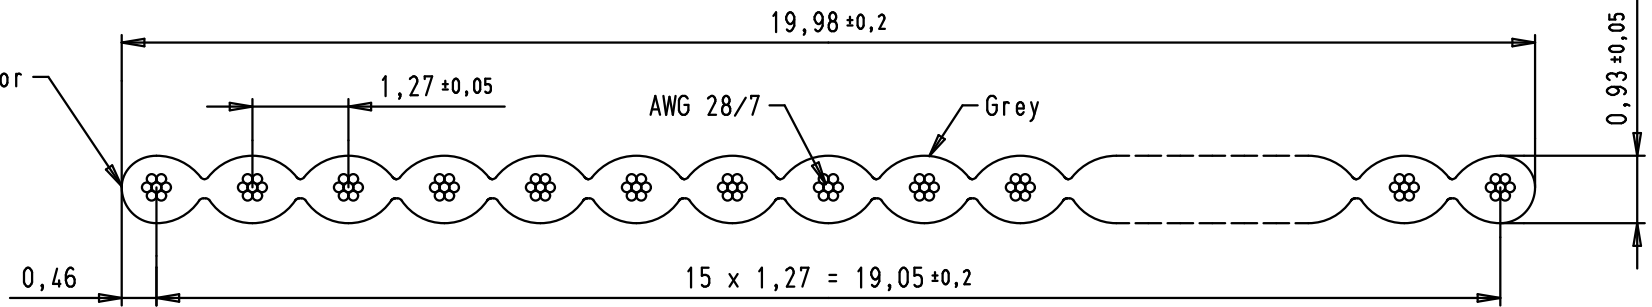
4

3

2



1

Edge mark on first conductor



- Wire ————— Tinned copper
- Gauge ————— AWG 28/7 0,089 mm²
- Voltage rating ————— 300 Vr.m.s
- Current rating ————— 2,1A at 25°C
- Capacity unbalanced ————— 45,9 pF/m at 1 MHz
- Impedance unbalanced ————— 105 Ω
- Propagation delay ————— 4,9 ns/m nominal
- Insulation material ————— PVC
- Temperature rating ————— -20°C (operating)
-30°C (static) to +105°C
- Flammability rating ————— Flame retardant VW1
- Insulation resistance ————— 100 MΩ/km
- Approval ————— UL AWM style 2651

09 18 016 7004	100 m (328 feet)
09 18 016 7001	30,48 m (100 feet)
Part number	Length per reel

				Det.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 flat cable 16 poles	Maßstab/ Scale
			Detail.	20/10/05	JMDR			10:1
			Insp.					
EC01360	19/02/10	SC	Stand.					
							TB 09 18 016 700X	Blatt/ Page
								1
								1
								Sub.

D

C

B

A