


MODEL:

# PDU3V602D354

## 3-Phase Power Strip for PDU360AT6G60 ATS Installations



208V  
3-Phase Input



8-Position  
Connector



208V  
Single-Phase  
Output



17.3kW  
Load Capacity



54 Outlets  
C13





0U  
Rack-Mount



Toolless  
Mounting Buttons

- A** Interlaced C13 Outlets
- B** 20A Double-Pole Magnetic Circuit Breakers (x6)
- C** 2.5 ft. Input Power Cord (x2)
- D** Input Plugs with Proprietary 8-Position Connector (x2)  
(Plugs into PDU360AT6G60 ATS PDU.)
- E** 3 ft. Circuit Detection Cable  
(Plugs into PDU360AT6G60 ATS PDU.)
- F** Toolless Mounting Buttons
- G** Grounding Screw

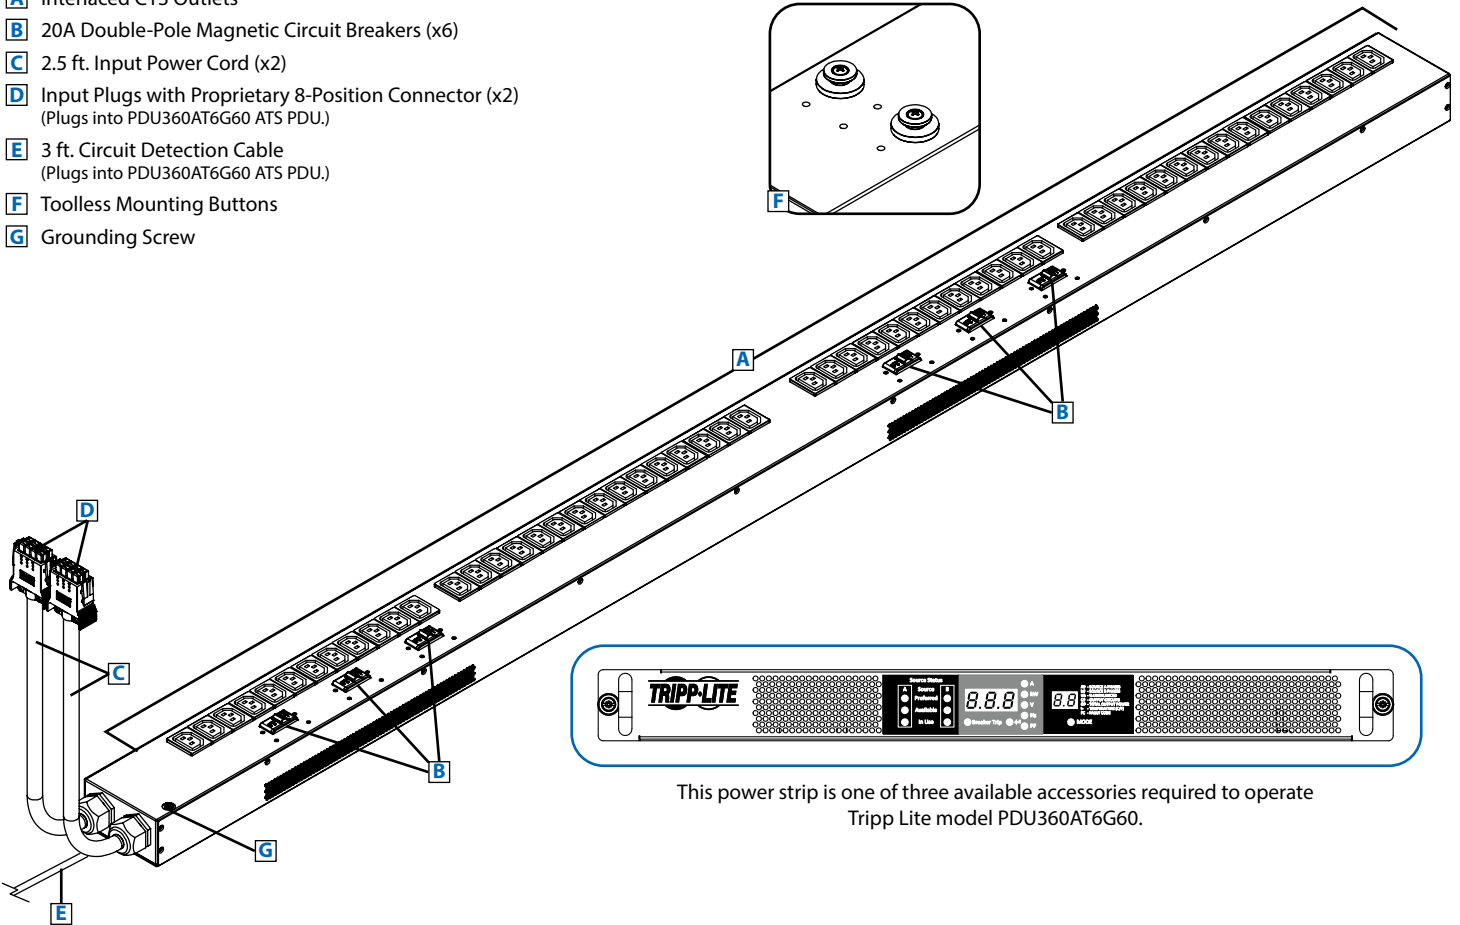

This power strip is one of three available accessories required to operate Tripp Lite model PDU360AT6G60.

- One of three available accessories for PDU360AT6G60 and other select Tripp Lite 3-phase ATS PDUs
- Saves rack space, improves airflow and reduces cord clutter by locating outlets closer to connected devices
- Ideal for high-density equipment racks in data centers and server rooms

**SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS**







1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com

### Specifications

Model	PDU3V602D354A
Voltage	208V
Frequency	60 Hz
Load Capacity	17.3kW
Input Plug	Proprietary 8-Position Connector (x2)
Input Cord Lengths	2.5 ft. (0.8 m)
Outlets	54 C13
Primary Mounting Options	0U (Vertical)
Unit Weight & Dimensions	19 lb. / 70 x 4 x 2.17 (HxWxD in inches) 8.62 kg / 1778 x 101.6 x 55.1 (HxWxD in mm)
Standards	Tested to UL/CSA 60950-1 (USA, Canada), FCC Class A (Emissions), NOM (Mexico), RoHS



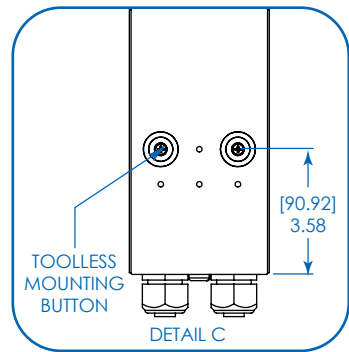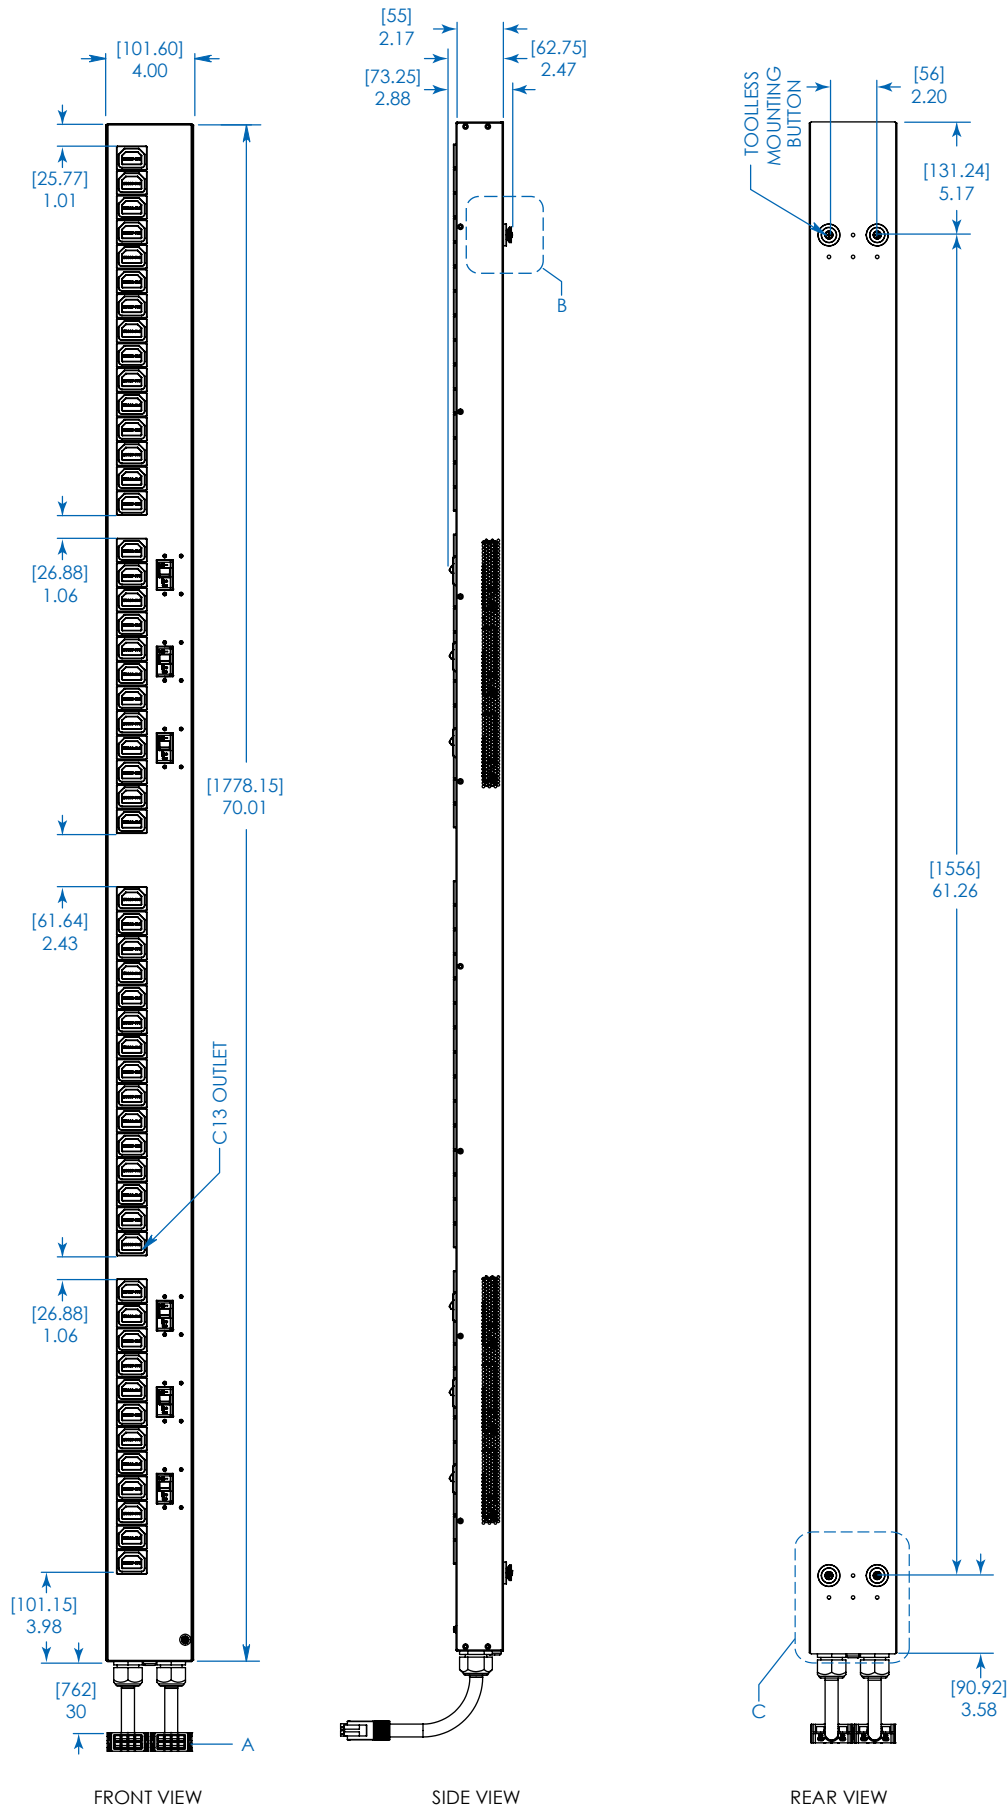

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:  
**PDU3V602D354**



1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com