


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 30COLOR
HOUSING: MOLDED NYLON 6 OR 6.6. AVAILABLE IN TEN COLORS.
CONTACT TIP: STEEL. BRIGHT NICKEL FINISH.
2. P/N: 9274COLOR
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.
ALLIGATOR: STEEL. NICKEL PLATED.
3. P/N: W-600/COLOR
18 AWG 65X36 TINNED COPPER INSULATION
PVC 0.144 [3.66] NOMINAL O.D.
AVAILABLE IN TEN COLORS.
4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

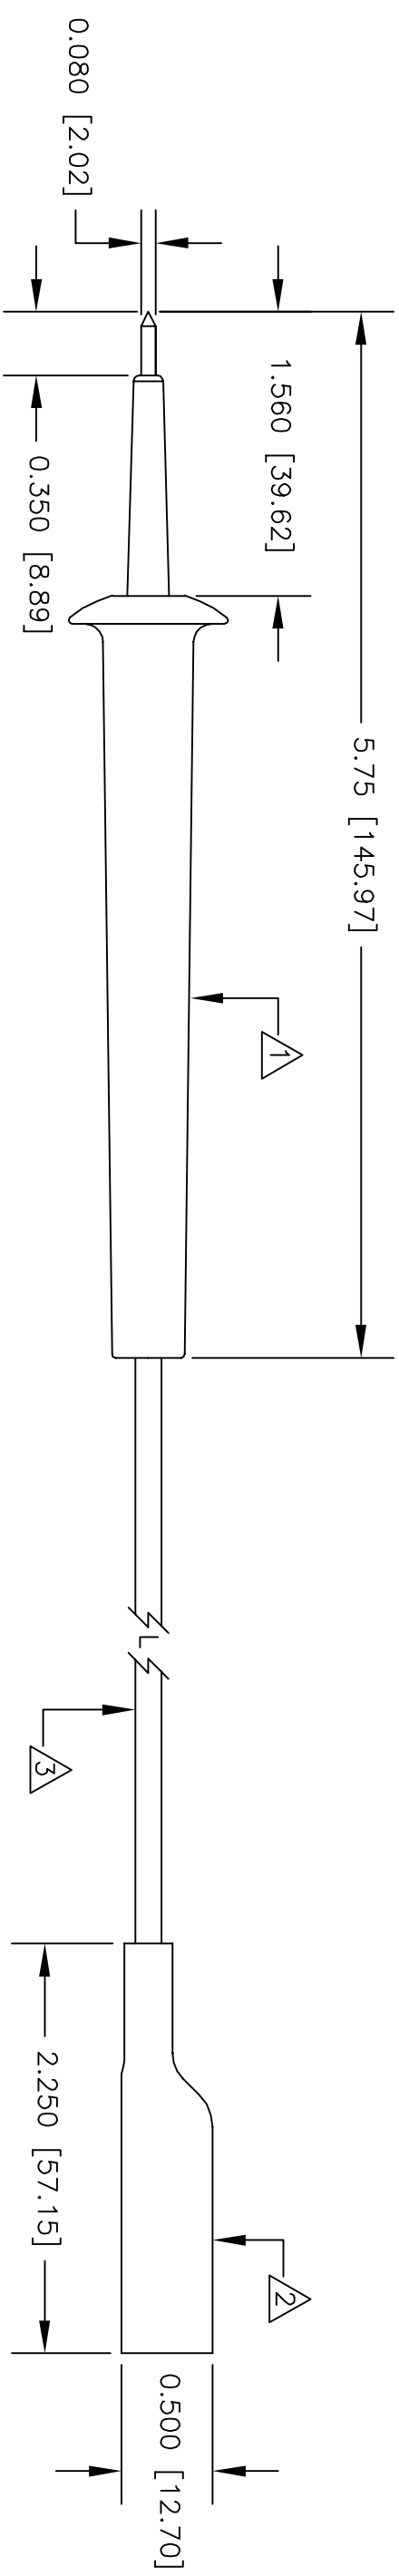

REVISIONS		DATE	APPROVED
LTR			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±		CONTRACT NO.	
MATERIAL SEE NOTE.		APPROVALS	DATE
FINISH SEE NOTE.		R.L.	11/10
APPLICATION		APPROVED BY	
DO NOT SCALE DRAWING			
DESCRIPTION PROBE (30) TO STD ALLIGATOR (9274)		SIZE	CODE IDENT NO. DRAWING NO.
NEXT ASSY		B	08505 669
SCALE		1:1	
SHEET 1 OF 1			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.

EZ-HOOK DIVISION OF TEKTEST INC.
ARCADIA, CA 91006 U.S.A.