
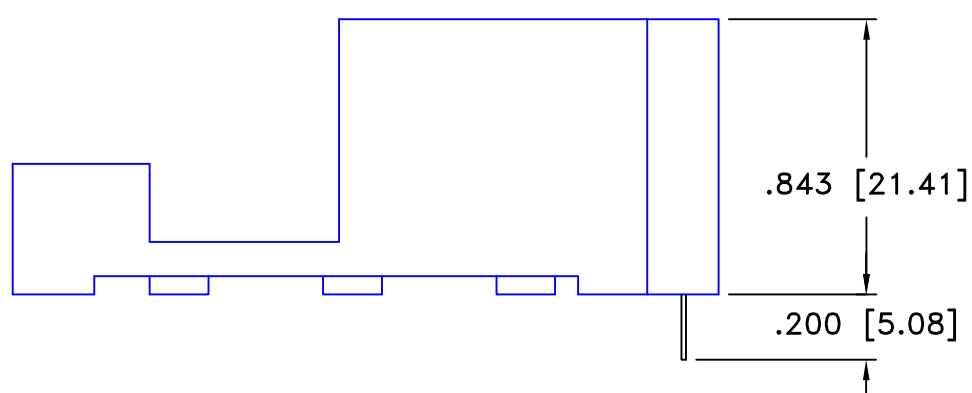
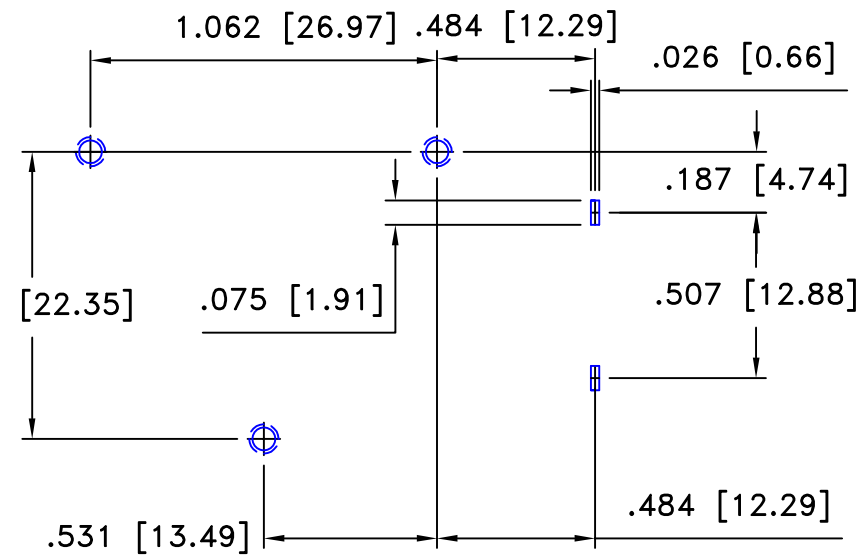


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
09/13/03	A	ADDED MOUNTING INSTRUCTION	T.B.	B.S.	
09/20/03	B	ADDED DIM. Ø.180 x .040 DEEP	T.B.	B.S.	
05/01/04	C	ADDED DIM. Ø.176 AND 1.092 UPDATED CONTACT MATERIAL	T.B.	B.S.	
10/28/06	D	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

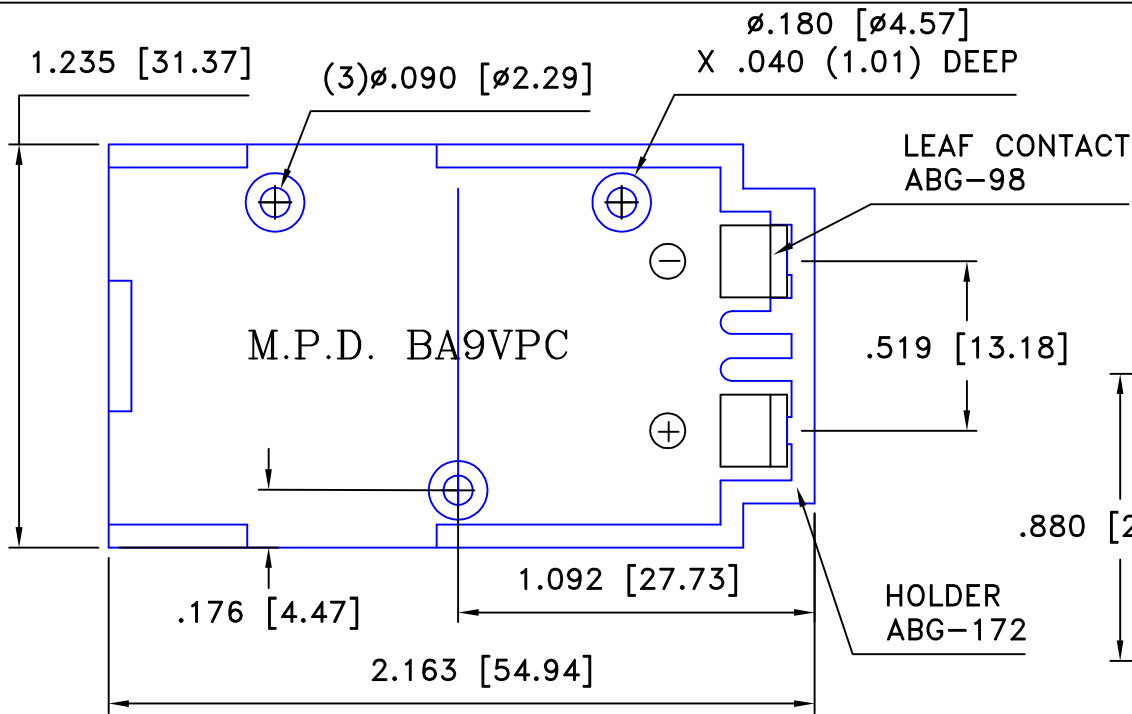


PCB LAYOUT

MOUNTING INSTRUCTION:
 USE 2-56 MACHINE SCREWS OR
 EYELETS 0.089" OD BY 0.15" FLANGE
 STIMPSON GS-3 SERIES OR EQUIVALENT
 ALSO ADHESIVES AND DOUBLE SIDED
 TAPES WORK WELL.

NOTE:
 ROHS COMPLIANT

FEATURES REVERSE POLARITY PROTECTION

QTY REQ'D	PART NO.	DESCRIPTION	MATERIAL
1	ABG-172	BA 9V PC HOLDER	HIGH IMPACT ABS BLACK, UL940-0 File No.E56070(S)
2	ABG-98	BC 9V PC LEAF CONTACT	PHOSPHOR BRONZE, .012" THICK NICKEL PLATED OVER ALL 5.4M MIN THICK

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By T.S.
decimal ±.5 (.020)		2=1	Approved By T.B.
Fractional ± .8 (.030)	Title BA 9V PC ASSEMBLY		
Angular ± 3°	Date 10/28/06	Drawing Number BA9VPC	