
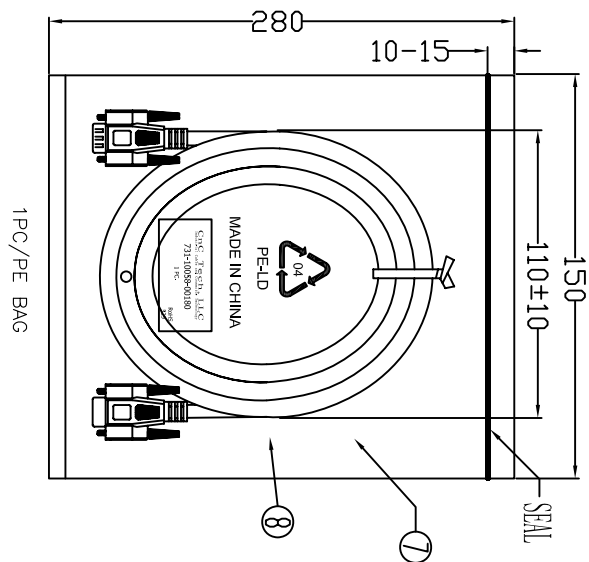
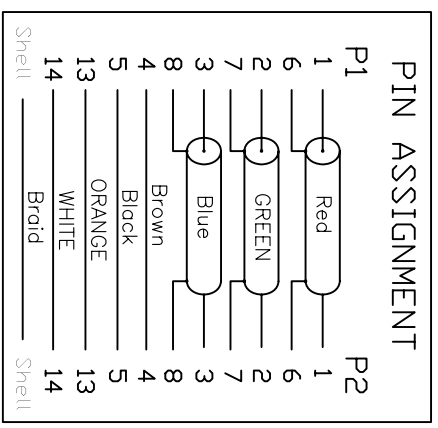


UNIT:mm

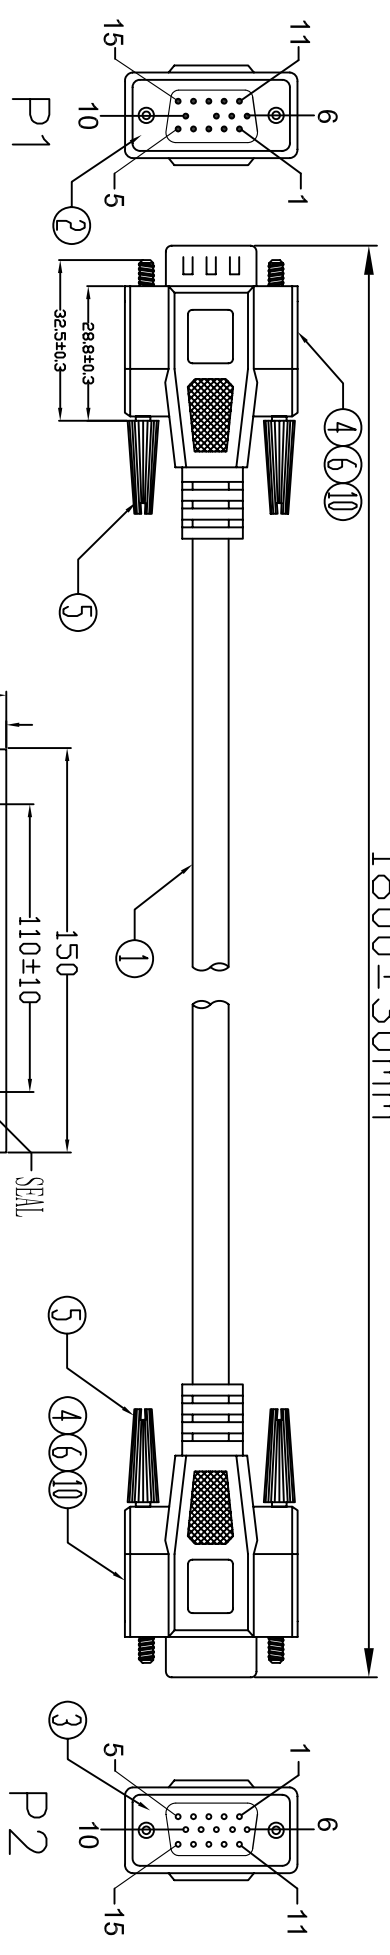

Electronic Test:
 1. 100% Test, (Open, Short, Miss Wire)
 2. Contact Resistance: 3 ohm max.
 3. Insulation Resistance: 20M ohm min.
 4. Hi-Pot: 300V DC/10ms

| | | | | |
|---|-------------|-------|---|---------------|
| ⑩ | TUBE | 14 | HEAT SHRINK TUBE BLACK OD:1.5* $L=15MM+2PCS$, OD:1.5* $L=10MM+6PCS$, OD:3.0* $L=8MM+6PCS$. | |
| ⑨ | PE BAG | 1/5 | CLEAR SIZE:360*380*0.05mm PRINT BLACK"MADE IN CHINA"+"5PCS". | |
| ⑧ | TIE | 2 | WHITE $L=120mm$ | |
| ⑦ | PE BAG | 1 | CLEAR SIZE:150*280*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC" | |
| ⑥ | COPPER FOIL | 2 | DOUBLE-SIDED CONDUCTIVE COPPER FOIL 18U" $W25mm*L=55mm$ | |
| ⑤ | SCREW | 4 | SCREW:#4-40UNC D-E $L32.5mm$, NICKEL PLATED, INSULATION COLOR BEIGE(V-29) | |
| ④ | OUT JACKET | 43.5g | BEIGE(V-29) 40P PVC(MOULD NO:NM-113) | |
| | IN JACKET | 8g | CLEAR LDPE(MOULD NO:NM-049) | |
| ③ | CONN | 1 | HDD15P FEMALE PIN G/F-SHELL-NICKEL INSULATION COLOR:BLUE. SOLDER TYPE. | |
| ② | CONN | 1 | HDD15P MALE PIN G/F-SHELL-NICKEL INSULATION COLOR:BLUE. MISSING 9PIN SOLDER TYPE. | |
| ① | CABLE | 1 | UL2919 28AWG (1C+S)*3COAX(T75 OHMS)+28AWG(T/0.125TC)+4C+AL/W(T/0.16TC)+B(24/6/0.12)+OUTER JACKET COROL:BEIGE(V-29) OD:8.1±0.15mm. $L=1800±10mm$. | |
| | NO. | NAME | QTY | SPECIFICATION |

CNC Tech, LLC
 Industrial Cable and Connector Technology

| | | | |
|------------------|---------|-------------|-----------------|
| DRAWN BY | ZHONGHS | DRAWING NO. | |
| CHECKED BY | | CUSTOMER | |
| APPROVAL BY | | ITEM NO. | 731-10058-00180 |
| DECIDE BY | | DATE | 2012-02-06 |
| VERSIONS/EDITION | A/0 | PROJECTION | |