

## Passive module - UM-4SL/SPT/ADR541/CS/C-L - 2968548

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Interface module for the connection of the field side via spring-cage connection to the Yokogawa ADR 541 card. Fuse (5 x 20) with fuse failure display (LED) per channel. AKB 334 system connection to the controller.

The figure shows version UM-4SL/  
SPT/ADR541/CS



### Key Commercial Data

|                                      |           |
|--------------------------------------|-----------|
| Packing unit                         | 1 STK     |
| Weight per Piece (excluding packing) | 727.000 g |
| Custom tariff number                 | 85369010  |
| Country of origin                    | Germany   |

### Technical data

#### Note

|                         |   |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

#### Dimensions

|        |          |
|--------|----------|
| Width  | 232.5 mm |
| Height | 126 mm   |
| Depth  | 104 mm   |

#### Ambient conditions

|   |                  |
|---|------------------|
| Ambient temperature (operation)         | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

#### General

|                              |   |
|------------------------------|---|
| Note                         | Voltage monitoring on the module does not work in combination with upstream HESILED fuse terminal blocks with integrated LED display. |
| Max. perm. operating voltage | 24 V DC $\pm$ 10 %  |

## Passive module - UM-4SL/SPT/ADR541/CS/C-L - 2968548

### Technical data

#### General

|   |                           |
|---|---------------------------|
| Max. perm. current (per branch)         | 630 mA                    |
| Max. permissible current (all branches) | 6.3 A                     |
| Status display                          | Green LED                 |
| Mounting position                       | any                       |
| Assembly instructions                   | In rows with zero spacing |
| Standards/regulations                   | DIN EN 50178              |
| Rated surge voltage                     | 0.8 kV (basic insulation) |
| Degree of pollution                     | 2                         |
| Overvoltage category                    | III                       |

#### Connection data for connection 1

|                                  |  |
|----------------------------------|--|
| Connection name                  | Field level                                |
| Connection method                | Spring-cage connection                     |
| Conductor cross section solid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>  |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 25 mm <sup>2</sup> |
| Conductor cross section AWG      | 24 ... 12                                  |
| Number of positions              | 32   |

#### Connection data for connection 2

|                       |                            |
|-----------------------|----------------------------|
| Connection name       | Controller level           |
| Connection method     | COMBICON connectors        |
| Number of connections | 4                          |
| Number of positions   | 18                         |
| Note                  | Yokogawa AKB334-compatible |

#### Supported controller

|                     |                          |
|---------------------|--------------------------|
| Controller          | YOKOGAWA CS3000 CentumVP |
| - suitable I/O card | ADR541                   |


#### Standards and Regulations

|                       |              |
|-----------------------|--------------|
| Standards/regulations | DIN EN 50178 |
| Degree of pollution   | 2            |
| Overvoltage category  | III          |

#### Drawings


# Passive module - UM-4SL/SPT/ADR541/CS/C-L - 2968548

Dimensional drawing

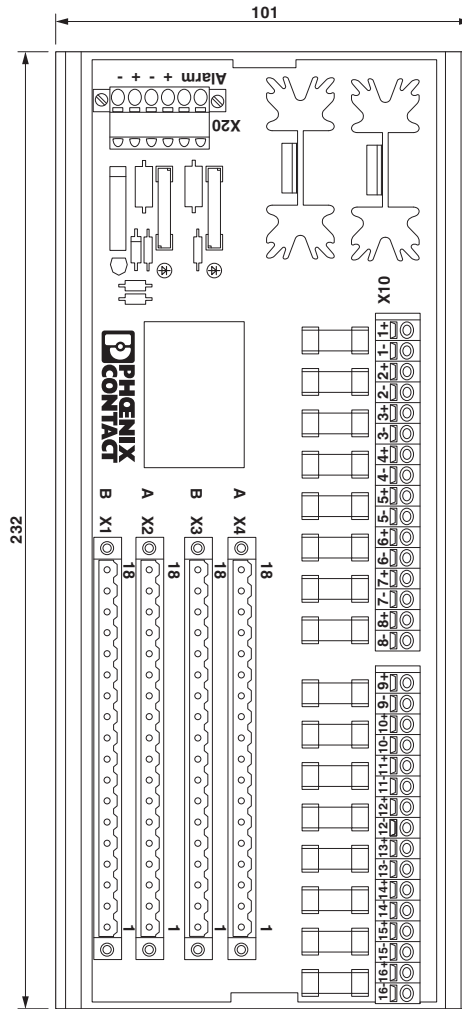

# Passive module - UM-4SL/SPT/ADR541/CS/C-L - 2968548

Circuit diagram

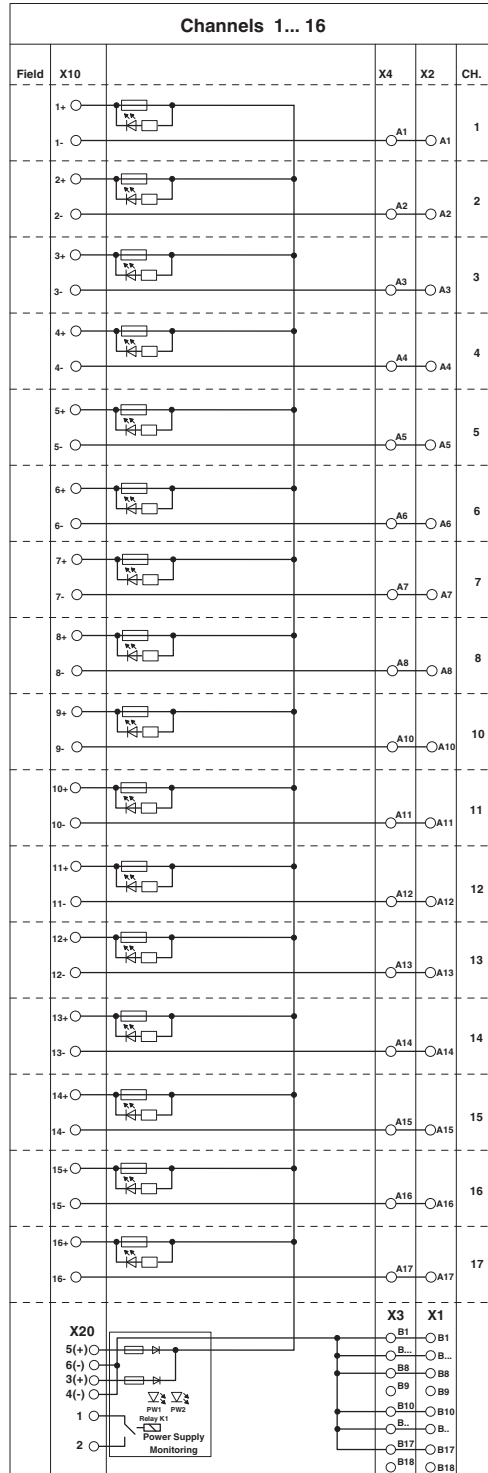

## Passive module - UM-4SL/SPT/ADR541/CS/C-L - 2968548

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27250313 |
| eCl@ss 4.1 | 27250313 |
| eCl@ss 5.0 | 27250313 |
| eCl@ss 5.1 | 27250313 |
| eCl@ss 6.0 | 27069203 |
| eCl@ss 7.0 | 27069203 |
| eCl@ss 8.0 | 27141152 |
| eCl@ss 9.0 | 27141152 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC001437 |
| ETIM 3.0 | EC001437 |
| ETIM 4.0 | EC001437 |
| ETIM 5.0 | EC002780 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211824 |
| UNSPSC 7.0901 | 39121421 |
| UNSPSC 11     | 39121421 |
| UNSPSC 12.01  | 39121421 |
| UNSPSC 13.2   | 39121421 |