



- NOTES:**
- INSULATORS: PBTP UL 94 V-0, GREY
 - CONTACTS: COPPER ALLOY
PLATING: GOLD OVER NICKEL
50 MATING CYCLES
 - PCB-CLIP: COPPER ALLOY
PCB-HOLE: $\phi 2.8 \pm 0.1$; PCB THICKNESS 1.6mm
 - CONNECTOR IS PART MARKED: 122A13339X CONEC Y/WW

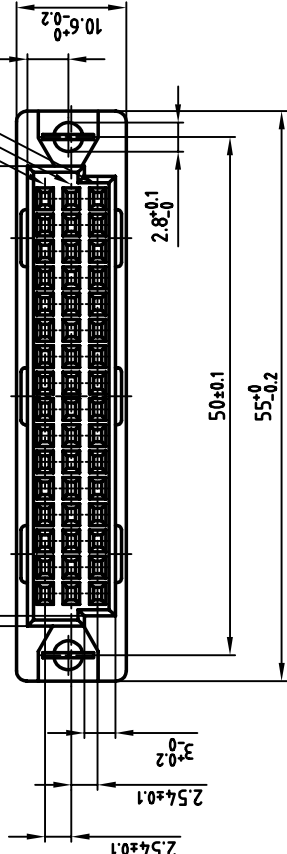

P.C.B. HOLE DRILLINGS

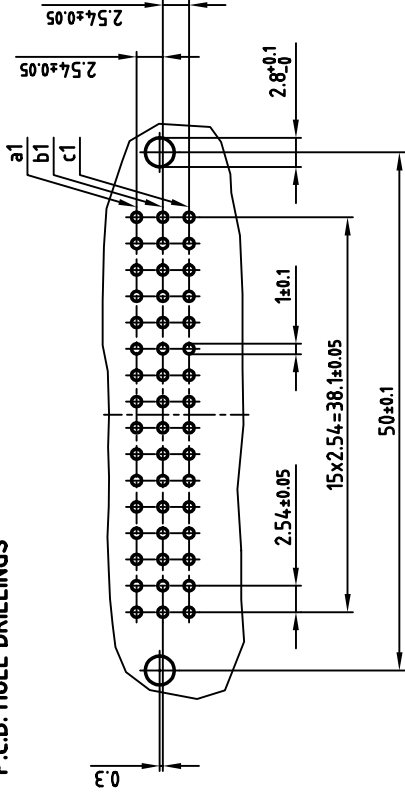

APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: _____ TITLE: _____

COMPANY NAME: _____

APPROVAL # FREIGABE # DEBLOCKAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

OWNERSHIP AND COPYRIGHT OF CONEC GMBH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		scale: 2:1	
2003		material: SEE NOTES	
drawn	date	name	title:
02.07.	02.07.	Lehmkuhler	FEMALE CONNECTOR TYPE "C 1/2"
appd.	02.07.	Mickenbecker	48pos. SOLDER PIN 2.5mm
norm	DIN EN 60603	DIN EN 60603	with clip
d-old			AutocAD
			DIN-A
			3
			sh: 1/1
			part no: 122A13339X
			dwg no: 12K1A258

