


REV. 0  
DCO 142658

COIL: @ 25°C	
RESISTANCE	140 OHMS ± 10%
NOMINAL VOLTAGE	9.0 VDC
MUST OPERATE	4.4 VDC
MUST RELEASE	2.6 VDC MAX. 0.5 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.  
CONTACT STABILIZATION TIME 2.5 MS MAX.

CUSTOMER DATA SHEET

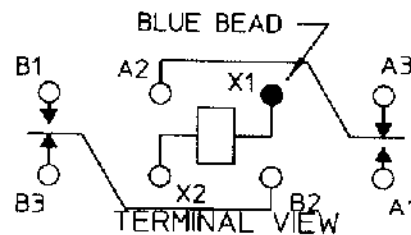

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE  
50,000 OPERATIONS

DR. PBB 1/25/01 CK. TLG 01-25-00

**IICT Technologies™**  
advanced control electronic solutions

CUST. QPL	"3SBC" RELAY
CUST. NO. M39016/13-075P REV. _____	

3SBC2020A2