

## Crimp contact - CC1,0-T-1,0-M AU PU100 - 1414275

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Turned 1.0 mm crimp contact, individual pin contact, connection cross section up to 1.0 mm<sup>2</sup>, gold-plated



### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	100 pc
Custom tariff number	85389099
Country of origin	Germany

### Technical data

#### Electrical characteristics

Rated current	4 A
---------------	-----

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
---------------------------------	------------------

#### Mechanical characteristics

Connection cross section AWG	22 ... 18
Stripping length of the individual wire	4.5 mm +0,5 mm
Conductor cross section AWG max.	18
Conductor cross section AWG min.	22
Insertion/withdrawal cycles	≥ 100

#### General

Type	Individual male contact
Connection method	Crimp connection

#### Material data

Contact material	CuZn
------------------	------

## Crimp contact - CC1,0-T-1,0-M AU PU100 - 1414275

### Technical data

#### Material data

Contact surface material	Ni/Au
--------------------------	-------

### Classifications

#### eCl@ss


eCl@ss 5.1	27260701
eCl@ss 6.0	27279221

#### ETIM

ETIM 5.0	EC000796
----------	----------

### Drawings

#### Dimensional drawing

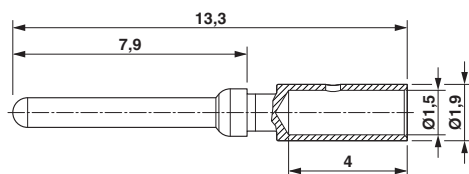

Crimp contact, diameter 1.0 mm