
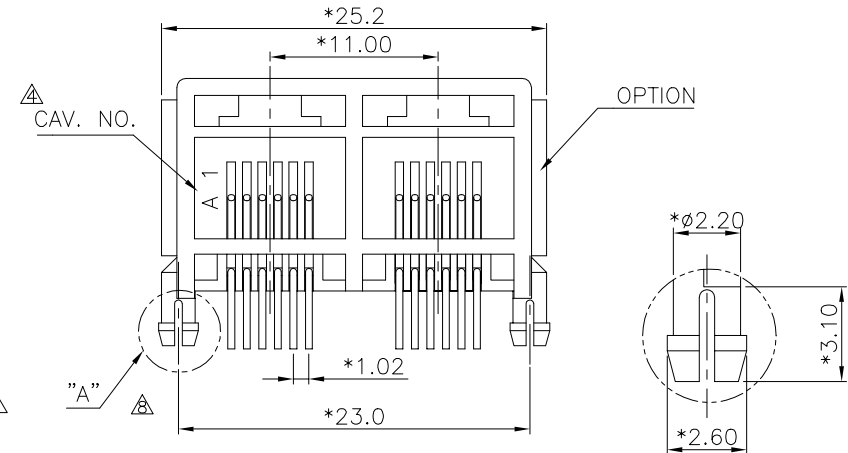
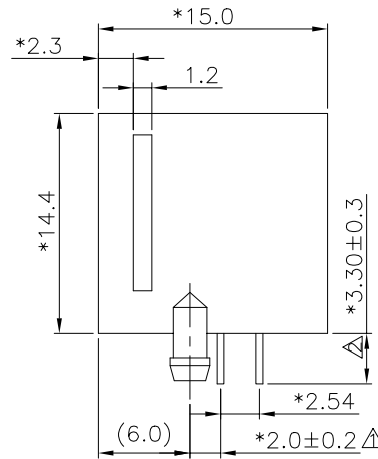


		REVISION RECORD		
REV	ECO	DESCRIPTION	DRFT	CHKD
△		ADD PART NO.	CXQ 04/06/05	
△		ADD PART NO.	CY 08/06/05	
△		ADD PART NO.	WLO 7/20/99	
△		ADD 'FRE' LOGO	LUSHENG 07/06/00	
△		ADD PART NO.	LGJ 3/14/03	ADD DIM 7/7/99 SYZ
△		ADD VIEWS	QIANPU 7/28/04	3.30±0.3 was 3.80±0.51 7/7/99 LWS
△		ADD NUMBER	YAN 08/21/04	PART NO. MODIFY 7/14/99 WLO
△		ADD NUMBER	LUXIN 12/25/04	ADD CAV. NO. YJK 7/26/99

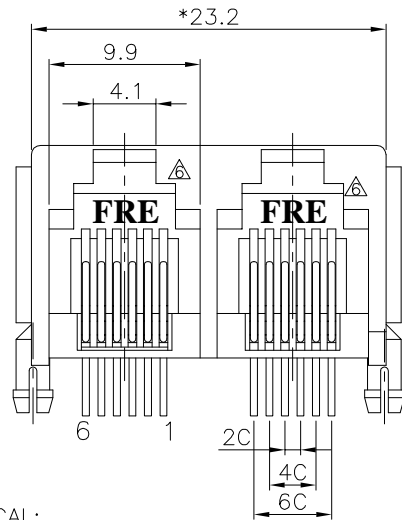

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : G.F. POLYESTER OR HIGH TEMP. UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

CUL FILE NO. E163191

△ PART NUMBER: E556X-80AXXX

- 2- 2C
- 4- 4C
- 6- 6C
- 0- A06-0100 BK.
- 1- A06-0110 GY.
- 4- A05-0040 BK.
- △ 6- A05-0160 BK.
- △ W- A06-1550 GREEN
- 1- 3u" 2-6u" 3-15u"
- 4-30u" 5-50u" F-Gold flash △
- 1-W/ PANEL STOP W/FRE LOGO △
- 2-W/O PANEL STOP W/FRE LOGO △
- △ L-W/ PANEL STOP W/OFRE LOGO △

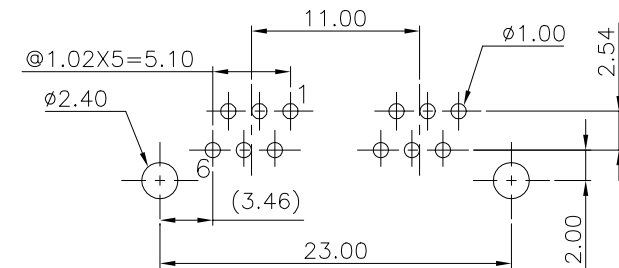

PC Board Layout Component Side Shown

← MM (INCH) →		DFTO SYZ	DATE 06/06/99'	FULL RISE ELECTRONIC CO., LTD	
CHKD	DATE	MFO	DATE	TITLE	
TOLERANCES EXCEPT AS NOTED		APPVL XLF	DATE 06/10/05'	L/P DUAL PORTS 6P	
MM	±	MATERIAL :		DRAWING NO. GE553016	
.0 ±0.20	±	QT'Y :		SIZE	REV
.00 ±0.15	±	FINISH :		A3	12
.000 ±0.075	±	SCALE : 3:1		DO NOT SCALE DRAWING	
ANGLES ±		SHEET X		OF Y	
THIRD ANGLE PROJECTION					