


SCHEMATIC

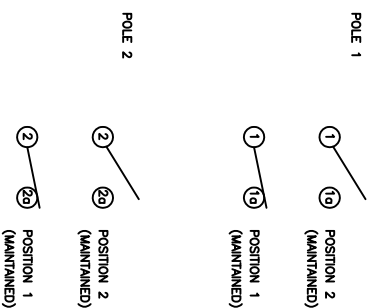

SPECIFICATIONS

FUNCTION:
 Pole 1: Off-On
 Pole 2: Off-On
 RATINGS:
 10A 125VAC [3.0U₀]
 6(C)A 250V~ 1125 1E4 [VDE]

CONTACT RESISTANCE:
 Inhibit: 35mΩ at 50VAC Min.
 INSULATION RESISTANCE:
 100MΩ at 500VDC Min.

DIELECTRIC STRENGTH:
 1500VAC For 1 Minute

ELECTRICAL LIFE:
 10,000 Cycles Min.

TEMPERATURE:
 Operating: -20°C to 105°C [UL, cUL]
 -20°C to 125°C [VDE]

APPROVALS:


MATERIALS

BODY:
 Polyamide 6/6 (PA66), UL94 V-2
 ACTUATOR:
 Polyamide 6/6 (PA66), UL94 V-2
 LAMP LENS:
 N/A
 LAMP:
 N/A
 SPRING:
 Steel
 BALL:
 Steel
 MOBILE CONTACT:
 Silver Plated Copper
 CONTACTS:
 Silver Plated Copper
 TERMINALS:
 Silver Plated Copper

COLORS AND MARKINGS

BODY:
 Black
 ACTUATOR/LENS:
 Pole 1: Black
 Pole 2: Black
 MARKINGS:
 Pole 1: None
 Pole 2: None
 MARKING COLOR:
 Pole 1: None
 Pole 2: None

SUGGESTED PANEL CUTOUT



PANEL THICKNESS	X
0.030~0.049 [0.75~1.25]	0.756 [19.2]
0.049~0.079 [1.25~2.00]	0.764 [19.4]
0.079~0.118 [2.00~3.00]	0.772 [19.6]

REFERENCE	REV.	DATE	BY
1			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH-LAMB

AND IS NOT TO BE COPIED OR TRANSMITTED

A	REV.

NEW RELEASE DESCRIPTION	2015	10/9/12	REP

FOR	DATE	DRAWN BY

INCHES [MILLIMETERS]
±0.008 [±0.2] / ±1'

SCALE	PROJECTION
DRAWING NOT TO SCALE	1st Angle

TITLE	ITEM NUMBER	DATE	REVISION
RA21131100	38-RA21131100	10/9/12	A

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

--	--

