

## Blade Fuseholders - FKH Stackable Fuseholder for ATO® Style Blade Fuse Rated 80V

RoHS





### Specifications

**Housing + Adapter:** Out of thermoplastic (UL 94-V0, heat-resistant)  
**Connections:** Leaf spring connector systems, soldering terminals, copper alloy, tinned  
**Color:** Black

### Dimensions in mm / Maße in mm

Fuseholder for ATO / FKS size fuses-links. Attachable in X - direction. Rated voltage 80V; crimp terminals.

Sicherungshalter für Sicherungen in ATO / FKS-Größe. Montage in X-Richtung. Nennspannung 80V, Crimp-Kontakte.

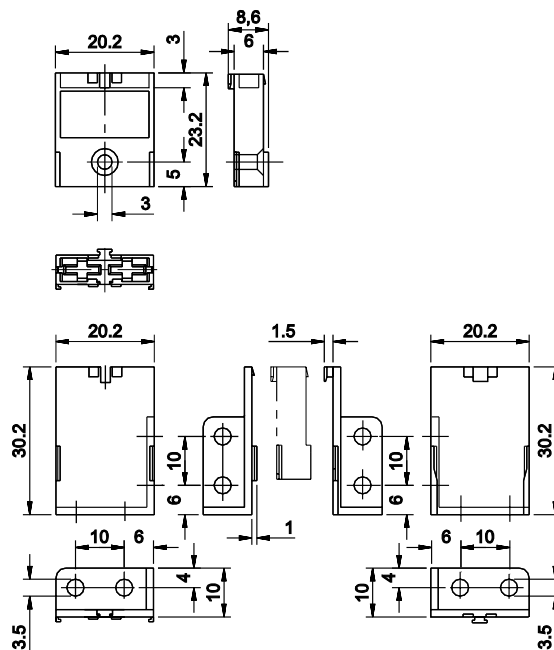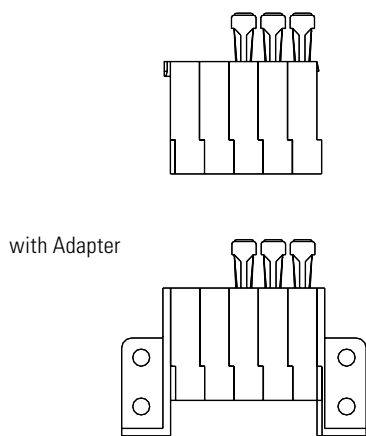

| Part Number<br>Artikel-Nr. | Description<br>Beschreibung             | Contact Temperature<br>Kontakttemperatur |
|----------------------------|-----------------------------------------|------------------------------------------|
| 178.6152.000_              | Complete                                | max. 130°C                               |
| 178.6150.000_              | Housing                                 | -                                        |
| 178.6116.250_              | Complete with 1.5 - 2.5 mm <sup>2</sup> | max. 130°C                               |
| 178.6152.250_              | With 200 mm wiring loop                 | -                                        |
| 178.6191.000_              | Adapter right                           | -                                        |
| 178.6192.000_              | Adapter left                            | -                                        |

Last figure of part number = packaging code, see Section "Packaging Index," pg. 157.

Corresponding fuse links see Section "Blade Fuses."

This FKH-Fuseholder can be mounted in row in any number. The fixing adapters are not included in the fuseholder. Please order the adapter separately.