



EDB125B

Voice Coil Impedance 1.5Ω 2Ω 3.2Ω 4Ω 6Ω 8Ω 12Ω 15Ω

Connect to Primary impedance , Total winding , Blue to Brown , (Red= CT)

Connect to	1.5Ω	2Ω	3.2Ω	4Ω	6Ω	8Ω	12Ω	15Ω
1-2	27000							
2-3	18000	24000						
3-4	16500	22000						
4-5	10000	13500	21600	27000				
5-6	8500	11000	18000	22000				
1-3	5400	7200	11500	15000	21600			
2-4	4200	5600	9000	11200	16800	22500		
3-5	3300	4400	7000	8800	13200	17600	26400	
4-6	2400	3200	5100	6400	9600	12800	19200	24000
1-4	2150	2900	4600	5800	8700	11600	17400	21500
2-5	1550	2050	3300	4100	6150	8200	12300	15500
3-6	1300	1700	2700	3400	5100	6800	10200	12800
1-5		1400	2200	2800	4200	5600	8400	10200
2-6			1700	2100	3150	4200	6300	8000
1-6			1200	1500	2300	3000	4500	5600

**125 SERIES
CONNECTION CHART**

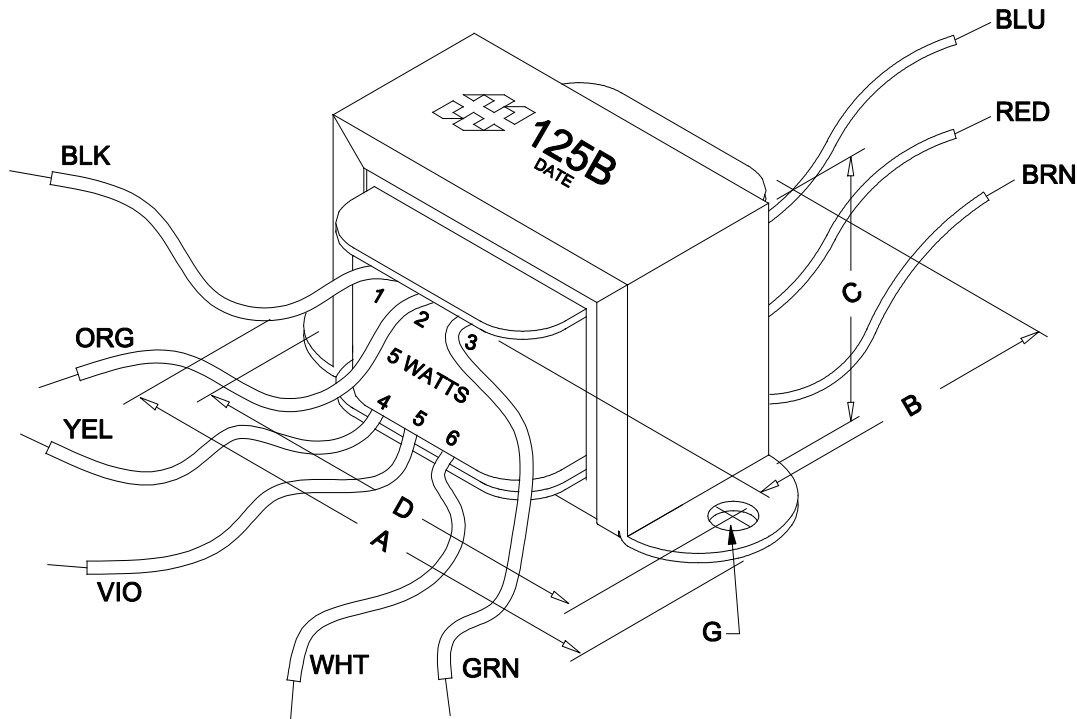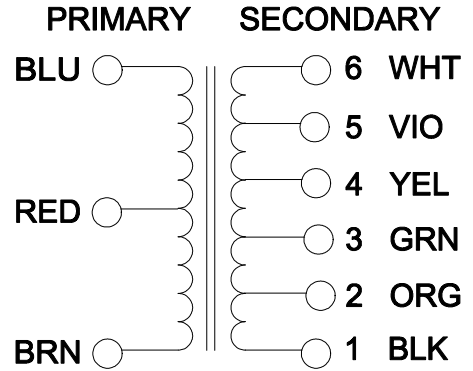

A [±0.063]	B [±0.125]	C [±0.063]	D [±0.063]	G [±0.015]
2.38"	1.38"	1.38"	2.00"	0.187



52 RANKIN PLACE,
WATERLOO, ONTARIO, N2L 3Z5.
PHONE (519) 886-6181
FAX # (519) 886-9540

TITLE				125B		EDB125B
				DR BY	B.PERVAIZ	
0	08/07/09			DATE	08/07/09	
NO	DATE	REVISION		DIM IN(X)MM()		