
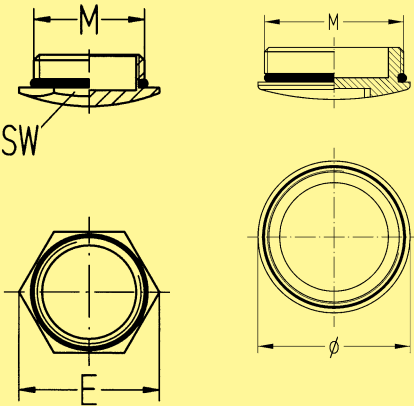
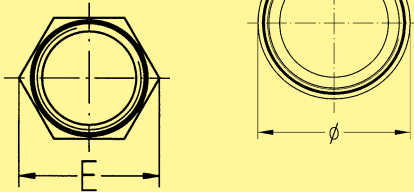

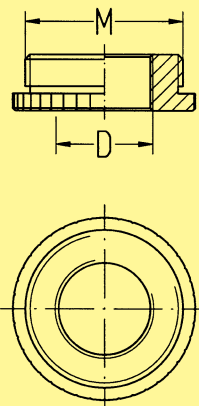

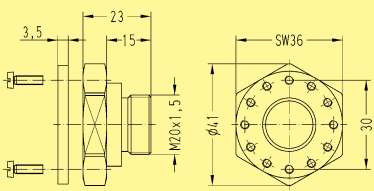
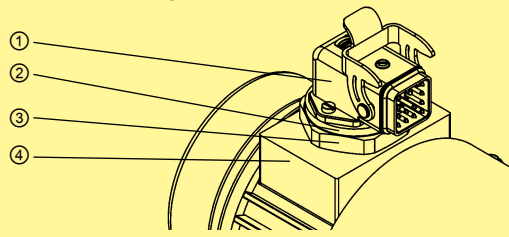


Identification	Part number	M	Drawing	Dimensions in mm										
Blanking piece for metric cable entries metal 	19 00 000 5070	20	<table border="1"> <thead> <tr> <th>SW</th> <th>E</th> </tr> </thead> <tbody> <tr> <td>22</td> <td>25.4</td> </tr> <tr> <td>28</td> <td>32.3</td> </tr> <tr> <td>35</td> <td>40.4</td> </tr> <tr> <td>44</td> <td>50.8</td> </tr> </tbody> </table> 	SW	E	22	25.4	28	32.3	35	40.4	44	50.8	
	SW	E												
22	25.4													
28	32.3													
35	40.4													
44	50.8													
19 00 000 5071	25													
	19 00 000 5072	32	<table border="1"> <thead> <tr> <th>Ø</th> </tr> </thead> <tbody> <tr> <td>35</td> </tr> <tr> <td>46.2</td> </tr> </tbody> </table> 	Ø	35	46.2								
Ø														
35														
46.2														
	19 00 000 5073	40												
	19 00 000 5172	32												
	19 00 000 5173	40												
Reducers for metric cable entries metal 	19 00 000 5060	20	<table border="1"> <thead> <tr> <th>D</th> </tr> </thead> <tbody> <tr> <td>16</td> </tr> <tr> <td>20</td> </tr> <tr> <td>25</td> </tr> </tbody> </table> 	D	16	20	25							
	D													
	16													
20														
25														
	19 00 000 5067	32												
	19 00 000 5068	32												
Adapter Han® 3 A for motor connection 	19 20 000 9962	20		sample for mounting: 										
					<table border="0"> <tr> <td>①</td> <td>Han® 3 A housing, bulkhead mounting</td> </tr> <tr> <td>②</td> <td>sealing</td> </tr> <tr> <td>③</td> <td>adapter</td> </tr> <tr> <td>④</td> <td>housing for motor applications</td> </tr> </table>	①	Han® 3 A housing, bulkhead mounting	②	sealing	③	adapter	④	housing for motor applications	
①	Han® 3 A housing, bulkhead mounting													
②	sealing													
③	adapter													
④	housing for motor applications													