

SUMMARY



Image is for illustrative purpose only

Wires

Low	0
High	0
Coax	0
Triax	1
Quad	0
Fiber	0
Fluidic	0

Download

[Request a quote](#)

[Catalog](#)

Series	00
Termination type	Male solder
IP rating	50
Cable Ø	2.30 - 2.70 mm
Matching parts	PCA.00.650.CLLC27
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FFC*: Straight plug with flats on latch sleeve and cable collet, black POM (Delrin®) outershell)
Keying	Circular (can rotate)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C27: 2.3 - 2.7 mm
Variant	

Performance

Configuration	0.65 : 1 Triax (50 Ohm)
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	3 Amps

Specifications

Contact Type:	Triaxial 50 Ohm (Solder)
Max. Matings:	1000
Contact Dia.:	0.5 mm (0.02" in)
Vtest:	1200 V (AC), 1700 V (DC)
Impedance:	50 Ohm


VSWR: $1.1 + 0.11 * f/\text{GHz}$

Others

IP Rating: 50

DRAWINGS

Draws

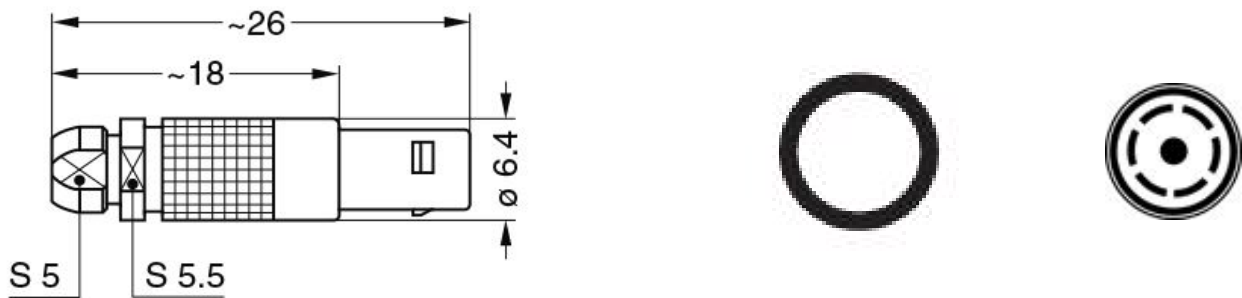

Dimensions

	A	L	M
mm.	6.4	29.2	18
in.	0,25	1,15	0,71

RECOMMENDED BY LEMO

Tools

Spanner wrench: DCD.00.003.PA050

Cables