



## Description

- Ceramic package with a hermetically seam sealed metal lid suitable for automotive applications. Qualified to AEC-Q200 and with TS16949 release.
- Model IQXO-540 AUTO
- Model Issue number 1

## Frequency Parameters

- Frequency 27.0MHz
- Frequency Stability  $\pm 100.00\text{ppm}$
- Operating Temperature Range  $-40.00$  to  $125.00^\circ\text{C}$
- Ageing  $\pm 5\text{ppm max per year @ } 25^\circ\text{C}$

## Electrical Parameters

- Supply Voltage  $3.3\text{V} \pm 10\%$
- Current Draw  $7.00\text{mA}$

## Output Details

- Output Compatibility CMOS
- Drive Capability  $15\text{pF}$
- Rise and Fall Time  $5.0\text{ns max}$
- Duty Cycle  $40/60\%$

## Output Control

- Enable/Disable Operation:  
Logic '1' ( $>70\% V_s$ ) to pad 1 enables oscillator output.  
Logic '0' ( $<30\% V_s$ ) to pad 1 disables oscillator output; the oscillator output goes to the high impedance state.  
No connection to pad 1 enables oscillator output.
- Standby Current:  
 $-40$  to  $85^\circ\text{C}$ :  $10\mu\text{A max}$   
 $-40$  to  $125^\circ\text{C}$ :  $20\mu\text{A max}$

## Environmental Parameters

- Storage Temperature Range:  $-55$  to  $125^\circ\text{C}$
- Qualified to AEC-Q200

## Compliance


- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

## Packaging Details


- Pack Style: Reel Tape & reel in accordance with EIA-481-D  
Pack Size: 1,000
- *Alternative packing option available*

## Technical Notes

- *Released to AEC-Q200*

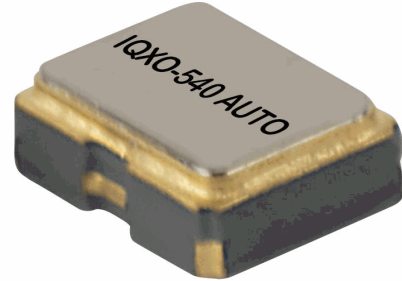

## Outline (mm)

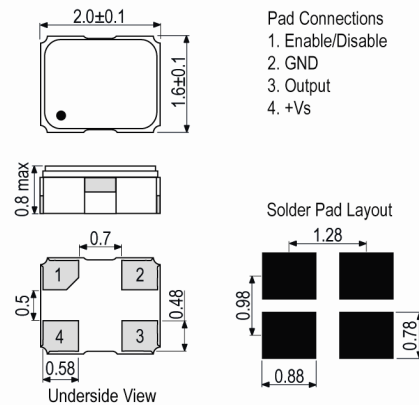

## Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1 408.273.4530

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)