


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
H	-	B	ECR-15-010046	13JUL15	SW	RZ	

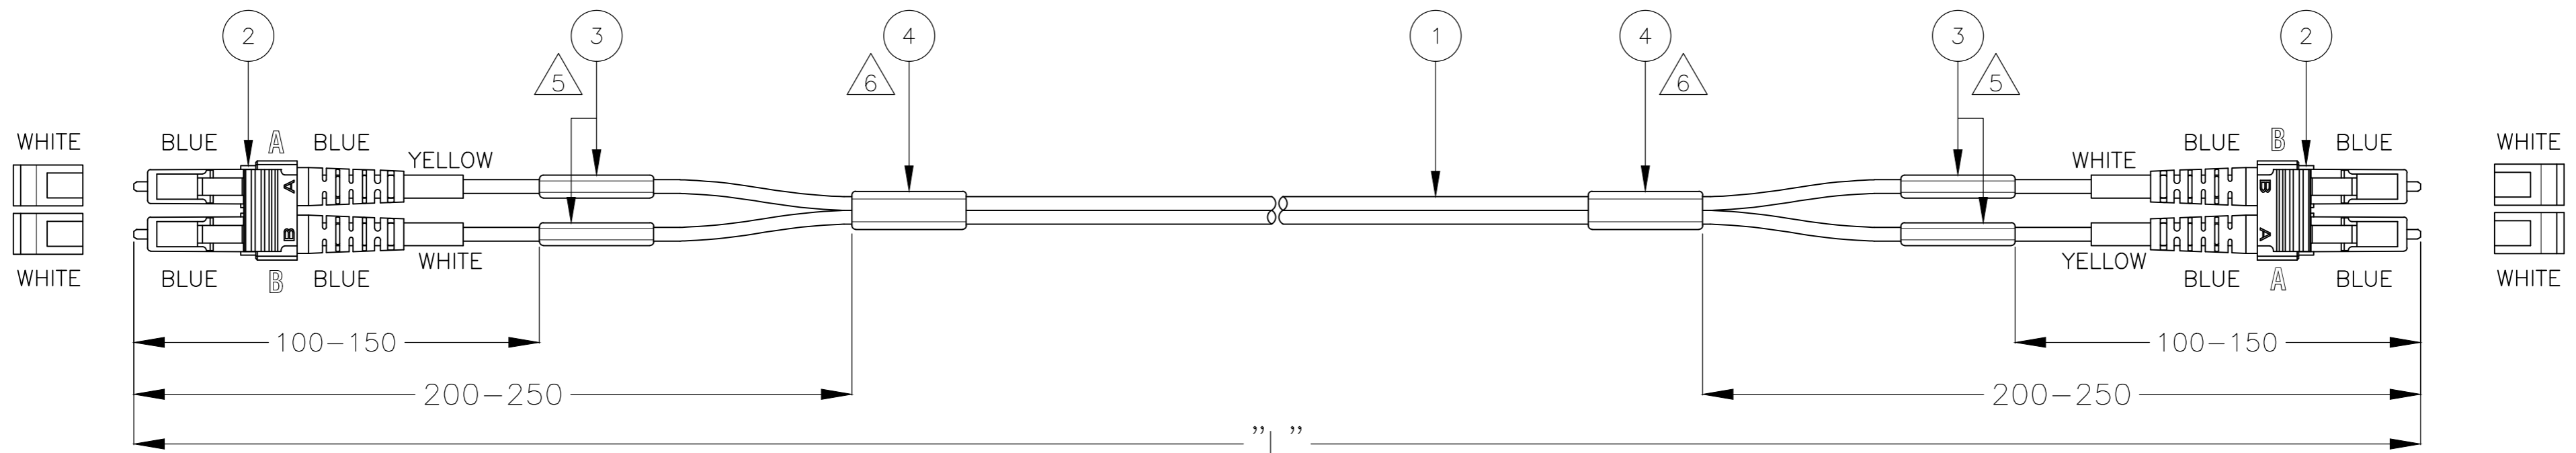


ASSEMBLY CONNECTIVITY	
LC CONN.	LC CONN.
YELLOW (A)	WHITE (B)
WHITE (B)	YELLOW (A)

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-2061531-Y	XY.0

NOTES:

- ATTENUATION ≤ 0.3 dB, MEASURED AT 1310 nm ACCORDING TO I.E.C. 61300-3-4 INSERTION METHOD B
- RETURN LOSS ≥ 45 dB, IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 1310 nm
- TUNED CONNECTORS
- CABLE INFORMATION:
 - CORE DIAMETER: 9/125 μ m (2x)
 - OUTER JACKET DIAMETER: 1.8 x 3.6 mm
 - OUTER JACKET COLOUR: YELLOW
 - OUTER JACKET MATERIAL: LSZH
- INFORMATION ON LABEL, SEE DETAIL FOR EXAMPLE
 - BARCODE
 - UNIQUE SERIAL NUMBER
 - ASSEMBLY LENGTH
 - TE CONNECTIVITY PART NUMBER & ORDER NUMBER
 - ATTENUATION AND RETURN LOSS AT 1310 nm
- BLANK LABEL
 - * ONLY ONE LABEL IN THE MIDDLE OF THE CABLE IS USED FOR LENGTHS < 0.6 METER

EXAMPLE LABEL DETAIL:

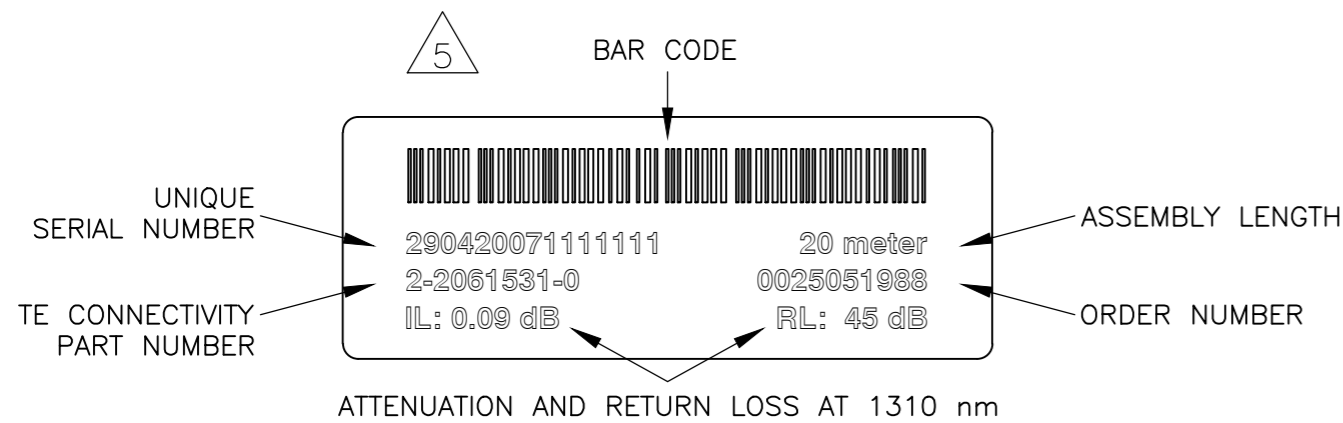

Qty	Description	Item
2	BLANK LABEL	4
4	INFORMATION LABEL	3
2	LC DUPLEX CONNECTOR, ULTRA SHORT, SINGLE MODE, BLUE	2
L	FOCAB 1.8MZ 9/125 G657A, YELLOW, LSZH	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COOLEN 13APR2011	
DIMENSIONS: mm		CHK R. GROENEVELD 01JUN2011	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. HENGELMOLEN 01JUN2011	NAME
0 PLC ± 1.0	1 PLC ± 0.5	PRODUCT SPEC	FIBER OPTIC LEAD 1.8MZ
2 PLC $\pm -$	3 PLC $\pm -$	APPLICATION SPEC	LC/DPX - LC/DPX ULTRA SHORT
4 PLC $\pm -$	ANGLES $\pm -$		SINGLE MODE 9/125 G657A
MATERIAL	FINISH	WEIGHT	SIZE CAGE CODE DRAWING NO RESTRICTED TO
-	-	-	A2 00779 C=2061531 -
CUSTOMER DRAWING		SCALE NTS	SHEET 1 OF 1 REV B